NG Power Terminals and Connectors Unsealed Power Housings – Flag 6.35 mm

Section Catalog 1654363-1 Issued 4-2010 Main Catalog 1654400-1 Chapter 16 – Issued 4-2010


Lamp Housings

Application

Lamp


Technical Features

- Low insertion force
- Low profile
- Initial Contact Resistance: $<3~\text{m}\Omega$
- Raw Material: German silver
- Current Capacity for 40 °C rise in T°: 1.0 mm² = 11 A 3.0 mm² = 14 A

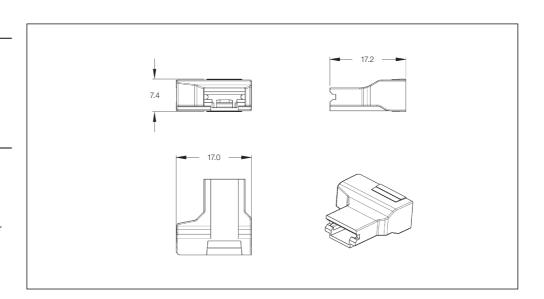

1 Position H1 Lamp Housing

Part Number	Package Quantity	Material	Color	Mating Contacts
1544351-1	19,000	PCT, UL 94 V-0 rated	Black	6.35 mm Flag Terminals: • 1544113-4 • 1544114-4

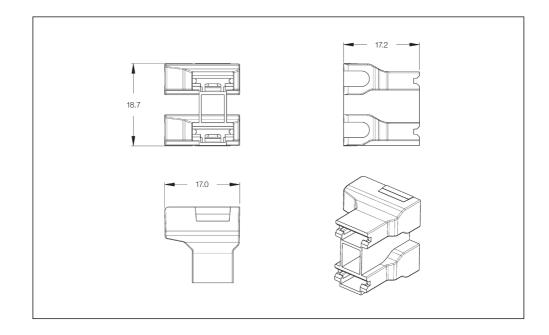

2 Position H7 Lamp Housing

Part Number	Package Quantity	Material	Color	Mating Contacts
1544352-1	6,000	PA 6.6, UL 94 HB rated	Black	6.35 mm Flag Terminals: • 1544113-4 • 1544114-4