

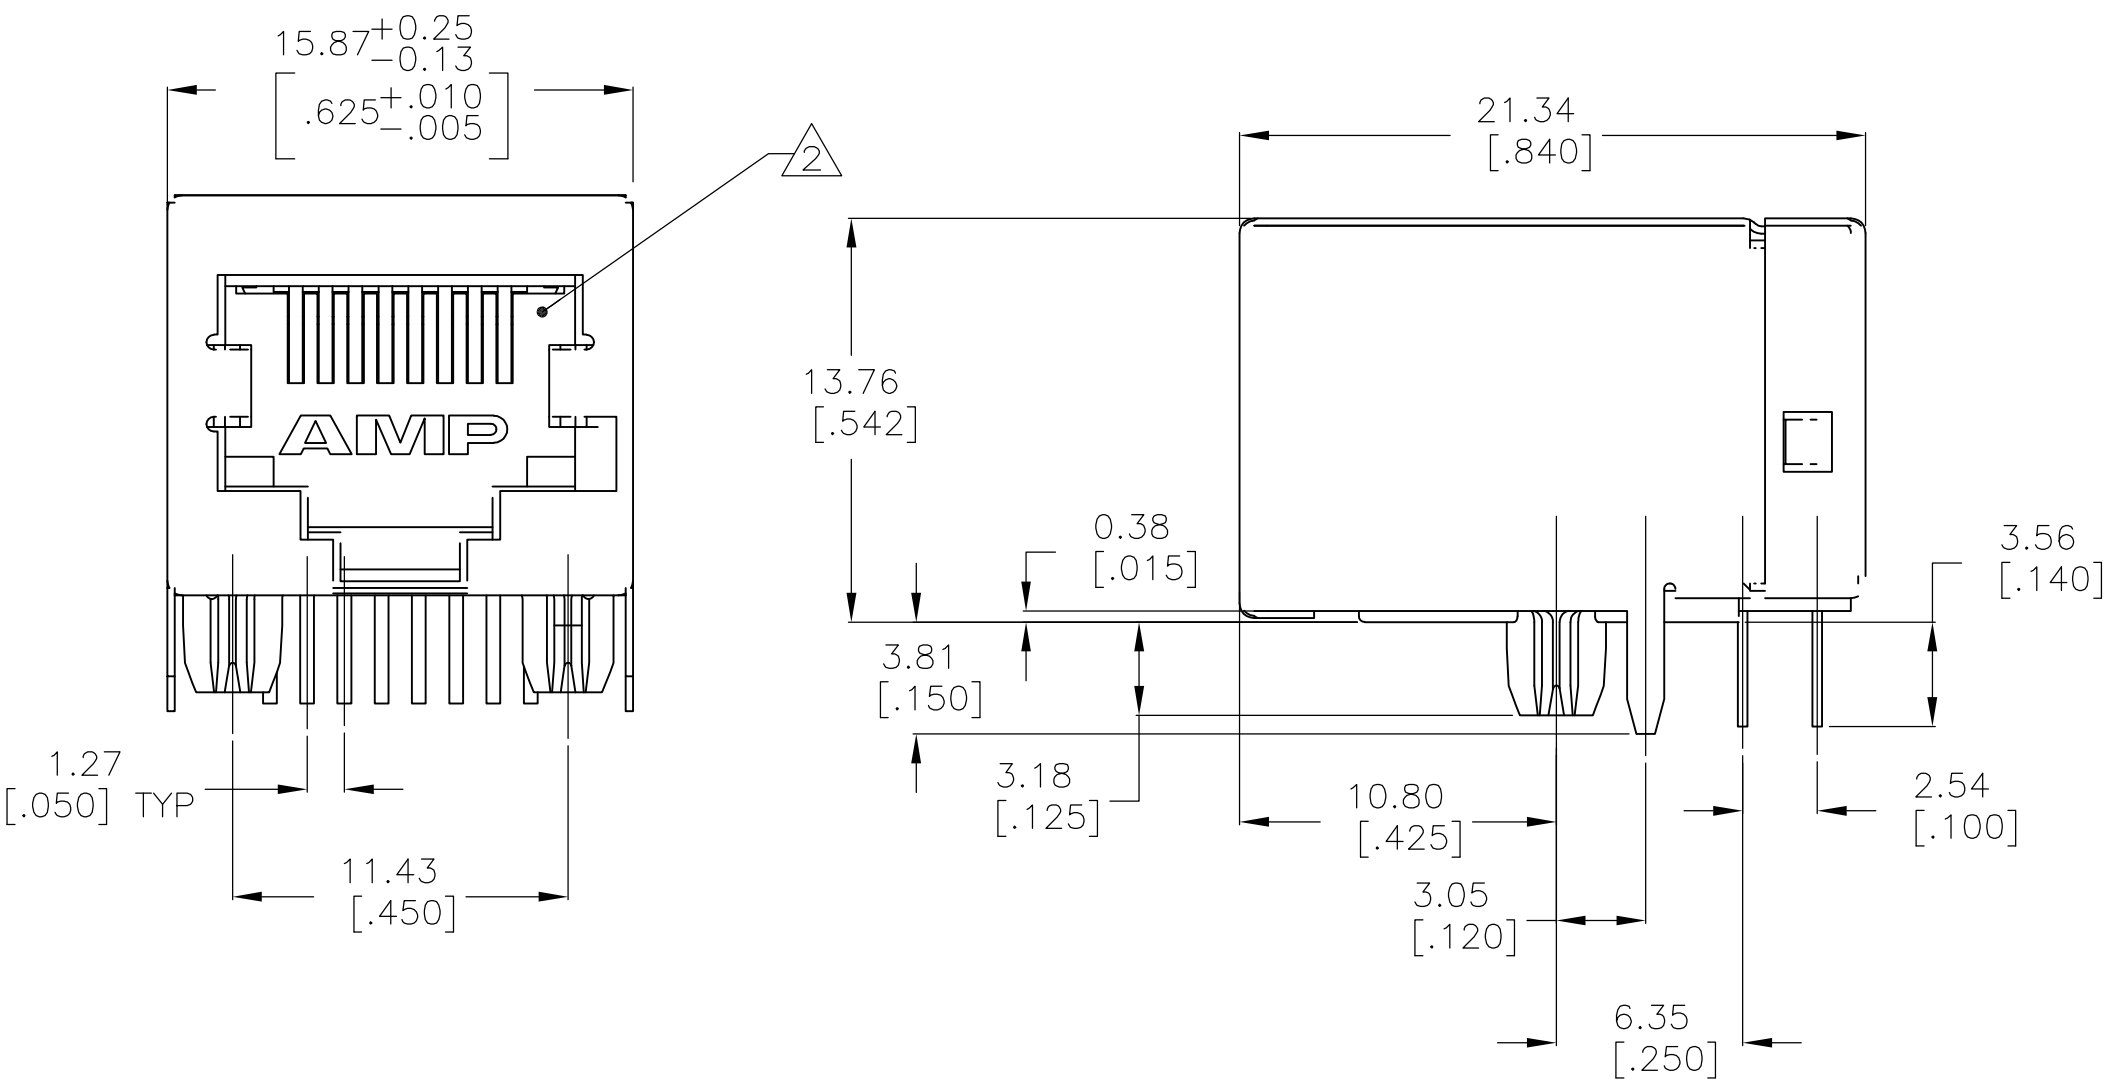
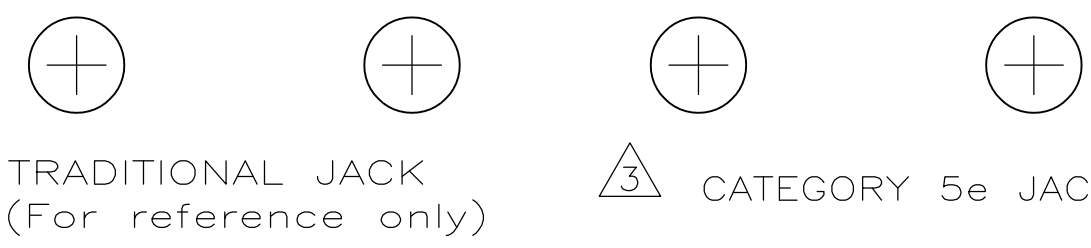


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AA	00		D1	REVISED PER ECO-11-005033	26MAR11	RK	HMR
			E	ECO-11-019003	19SEP11	JJ	MQW
			F	ECO-13-009636	9JUN13	C.W	S.H

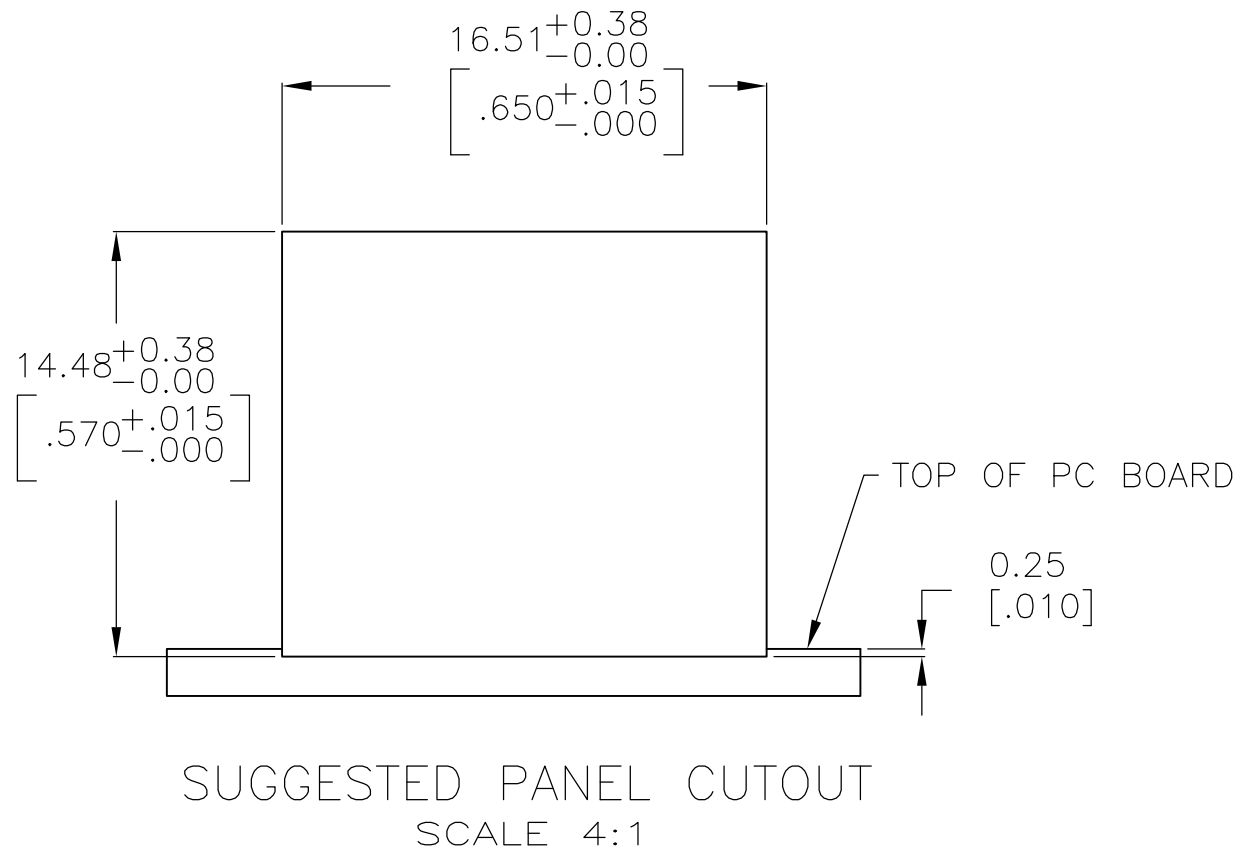

1. MATERIAL: HOUSING HTN, BLACK.
- TERMINALS – 0.33[0.013] THICK PHOS BRONZE PLATED WITH 1.27 μ m[0.000050] MINIMUM THICK HARD GOLD IN LOCALIZED AREA AND 3.81 μ m [0.000150] MINIMUM THICK MATTE TIN IN SOLDER AREA OVER 1.27 μ m[0.000050] MINIMUM THICK NICKEL UNDERPLATE.
- SHIELDS – 0.254[0.010] THICK COPPER ALLOY PLATED WITH 1.27 μ m[0.000050] MINIMUM NICKEL AND 2.03 μ m [0.000080] MINIMUM HOT TIN DIP ON PCB GROUND TABS.

2. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS, PART 68 SUBPART F.
3. CAUTION: CATEGORY 5 JACK SOLDER TAIL POSITIONS DO NOT FOLLOW SAME NUMBER SEQUENCE AS THAT OF TRADITIONAL JACKS.
4. USE #30 DRILL BIT OR 3.25mm DRILL BIT WHEN PRODUCING THESE PCB HOLES.
5. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
6. SHIELD MATERIAL: PHOS BRONZE.

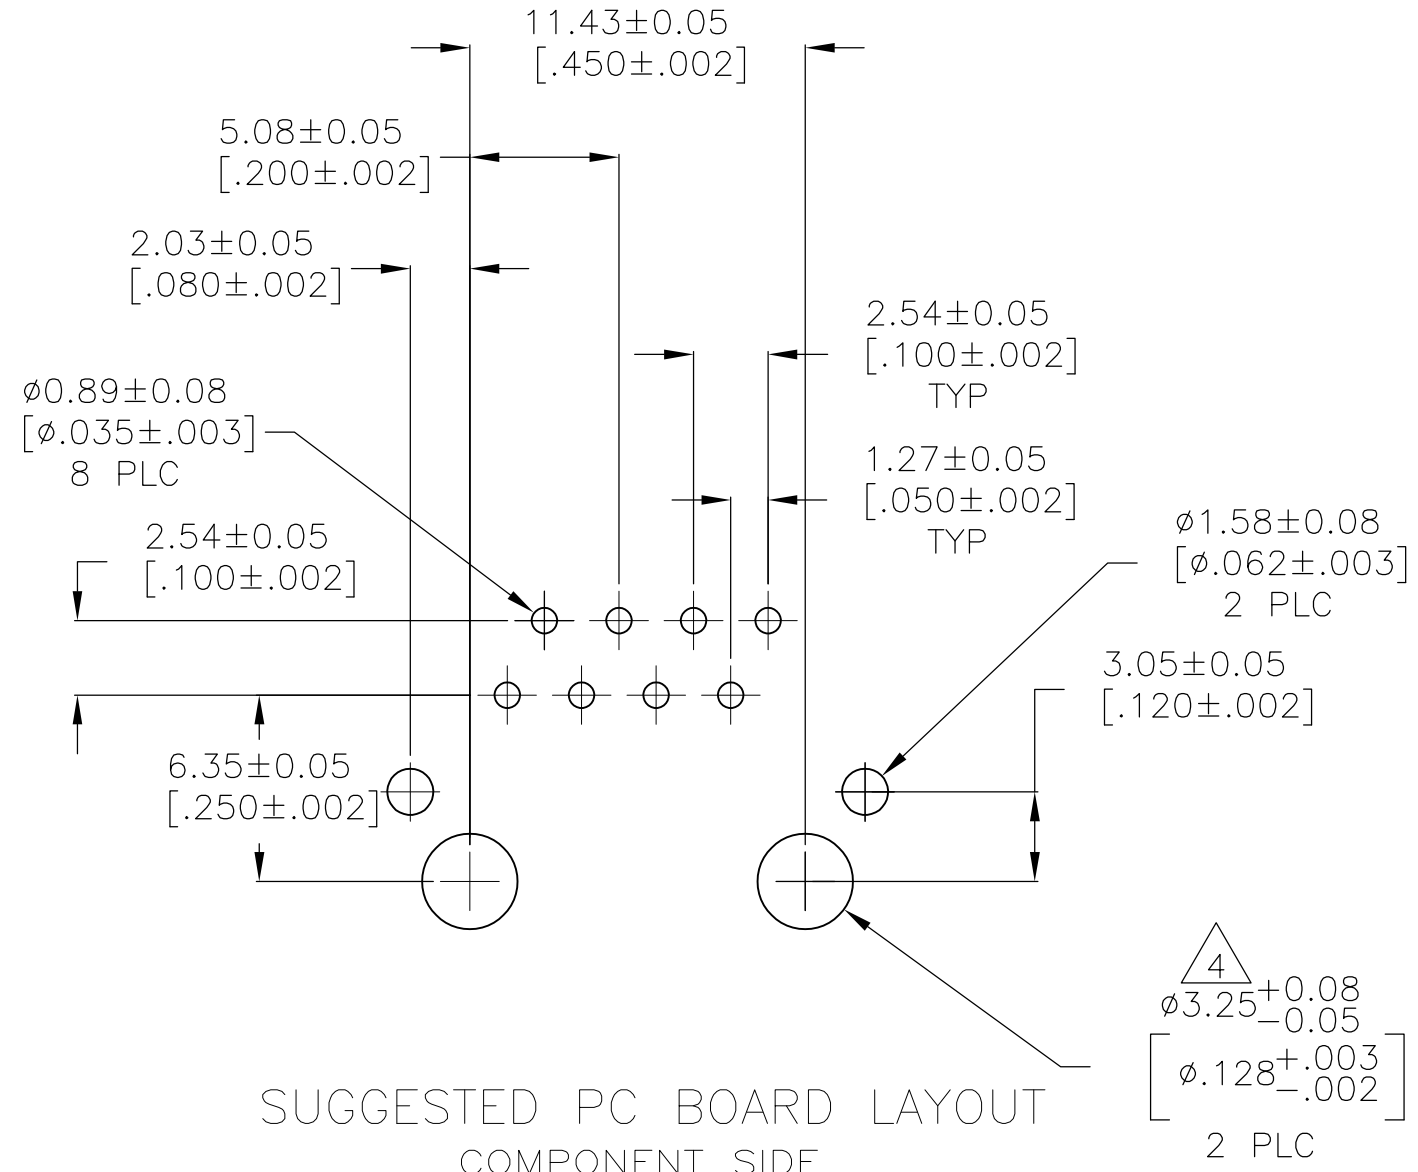

OBSOLETE	6	BLACK	5558342-3
		GRAY	5558342-2
		BLACK	5558342-1
		HOUSING COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T. PITTS/LA.MAYER 01JUNE2005	TE Connectivity			
DIMENSIONS: mm		CHK J.WESTMAN 01JUNE2005				
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME			
	0 PLC ± - 1 PLC ± - 2 PLC ± 0.25[0.010] 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC			
	FINISH		108-1163-2			
MATERIAL SEE NOTE 1		SEE NOTE 1	APPLICATION SPEC		114-2048	
			WEIGHT		-	
CUSTOMER DRAWING			SIZE A2		CAGE CODE 00779	
			DRAWING NO C=5558342		RESTRICTED TO -	
			SCALE 4:1		SHEET 1 of 1	
					REV F	