



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	00	K	REVISED PER ECR-13-016757	30-DEC-14	SC KD

- 1. 150°C TEMPERATURE RATING FOR THIS HOUSING IS FOR SHORT TERM DURATION ONLY. MAXIMUM OPERATING TEMPERATURE REMAINS 105°C.
- 2. INDIVIDUAL CORING FEATURES AROUND BASES OF SILOS MAY NOT BE PRESENT IN ALL LOCATIONS SHOWN.

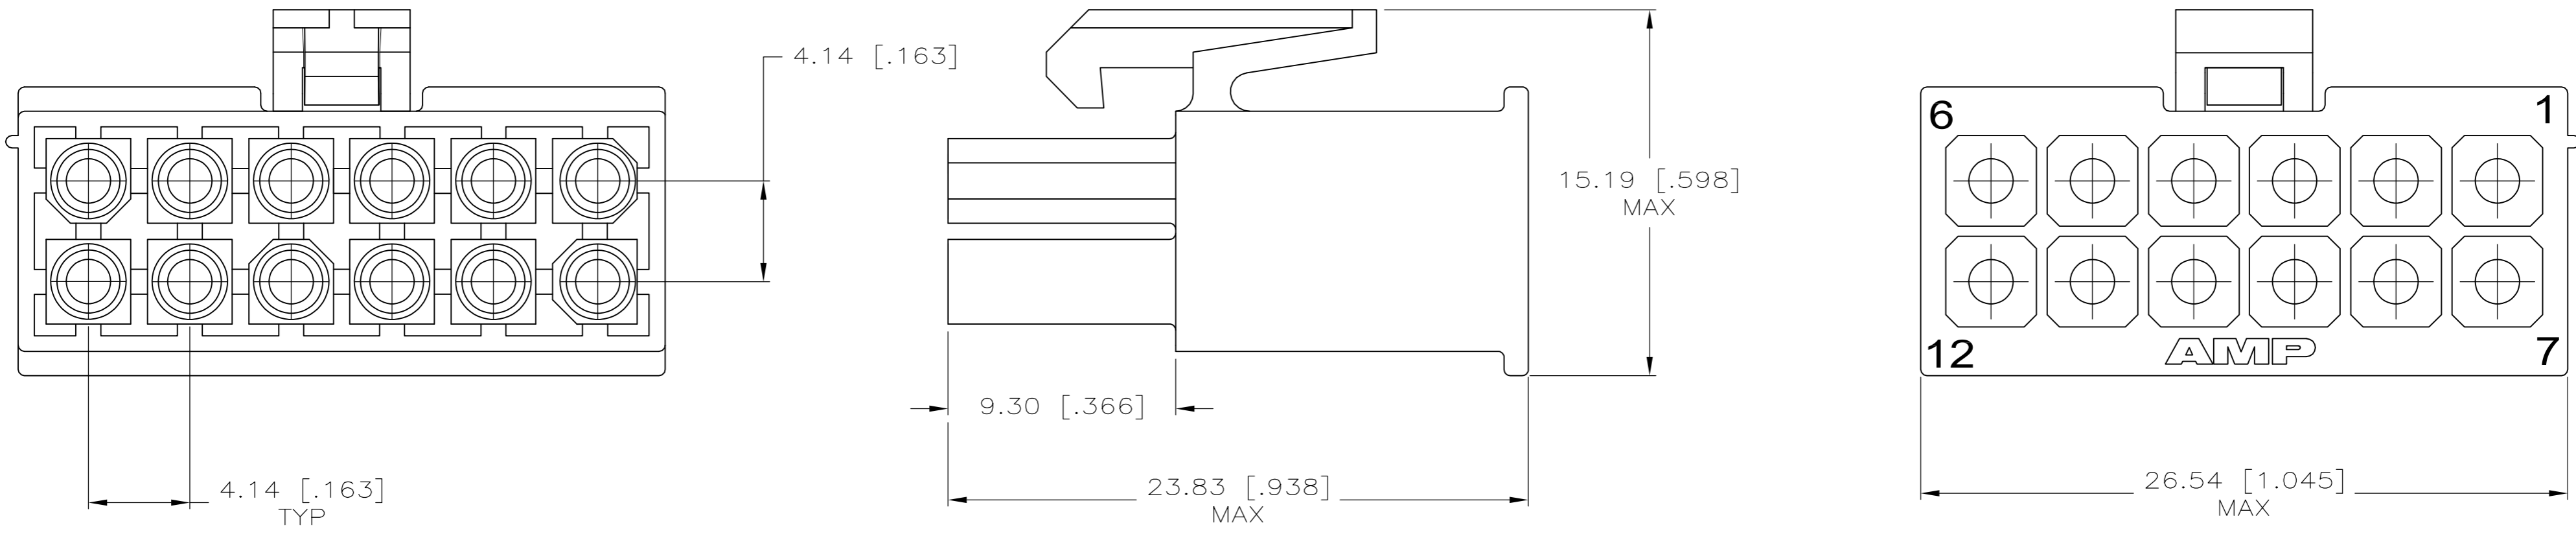

1	HIGH TEMP NYLON, UL94V-2, BLACK	1-770581-0
	NYLON, UL94V-0, WHITE	770581-1
	MATERIAL	PART NO

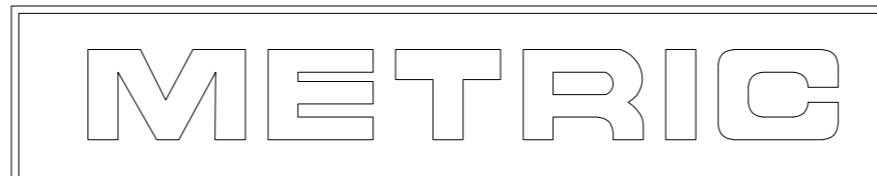

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	S. HOOVER	12-MAY-2004				
DIMENSIONS: mm [INCHES]		CHK	C. JONES	12-MAY-2004				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	C. JONES	12-MAY-2004				
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 0.13 [.005] 4 PLC ± ANGLES ±		PRODUCT SPEC	NAME					
MATERIAL	FINISH	APPLICATION SPEC	PLUG, 12 CIRCUIT, MINI UNIVERSAL MATE-N-LOK™		RESTRICTED TO			
		WEIGHT	SIZE	A2	CAGE CODE	00779	DRAWING NO	C=770581
CUSTOMER DRAWING		SCALE	5:1	SHEET	1 of 1	REV	K	

770581