THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST
H	—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	EH01-1520-03	22-12-03	JvdH	—
	B1	ECR-08-015757	09-07-08	AEG	KMA

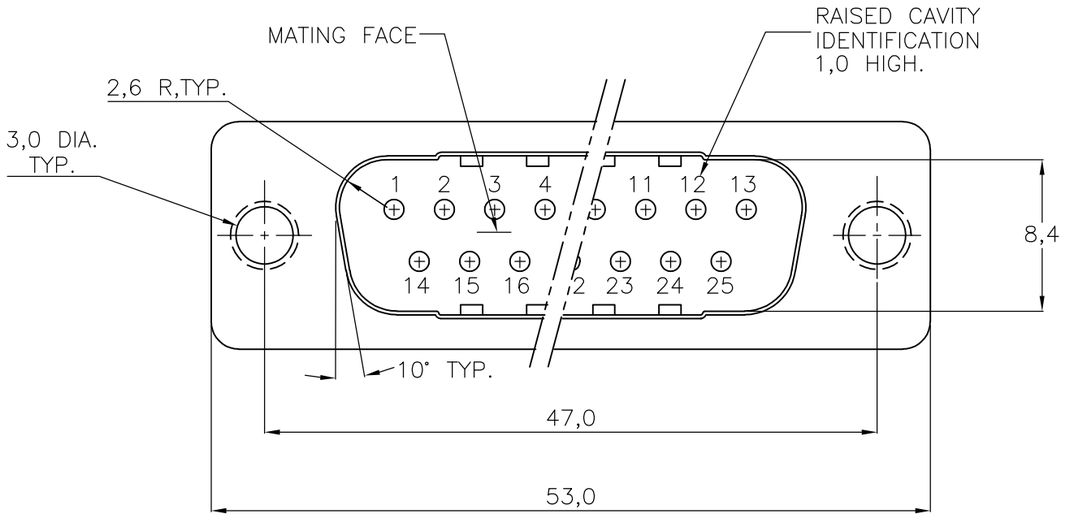

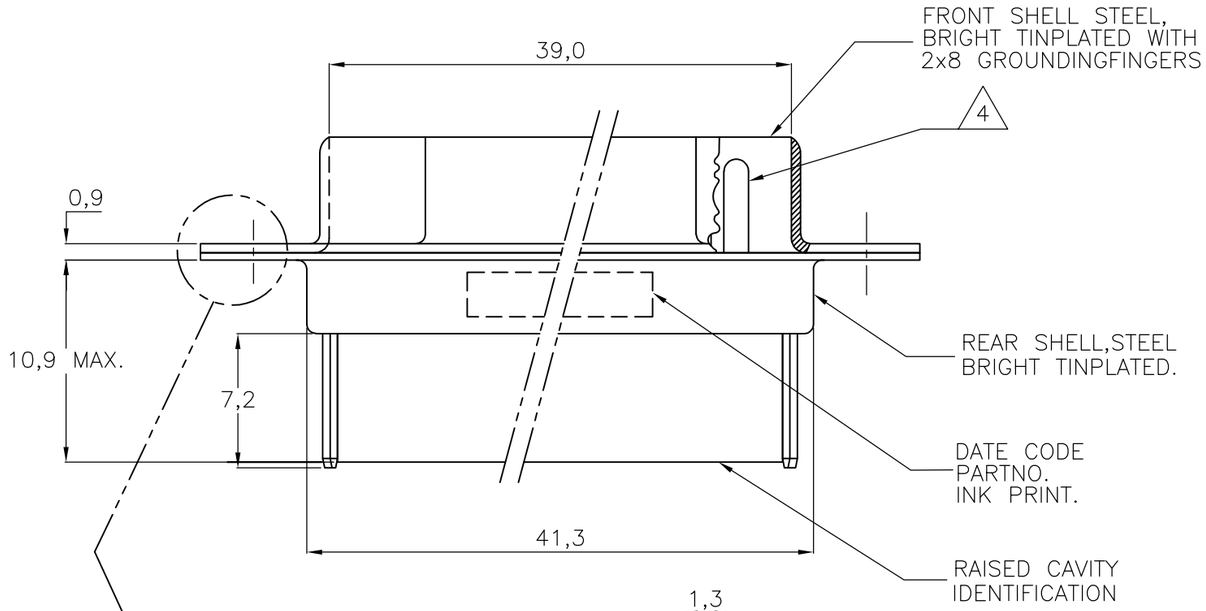

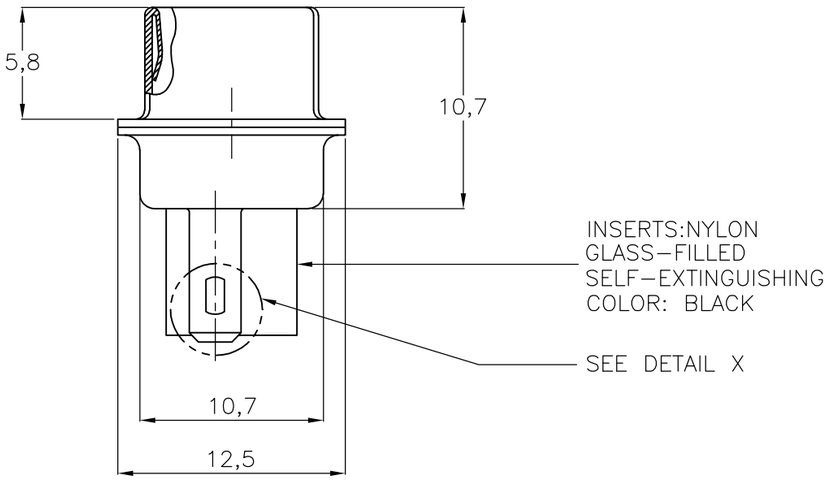



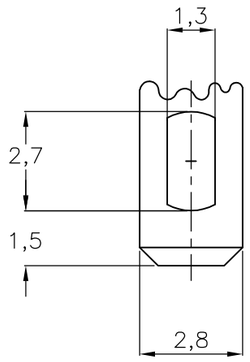

DETAIL X
(TAB-THICKNESS : 0,4)

NOTES:

1 THIS PLUG ACCEPTS SIZE 20 PIN CONTACTS

2 MAXIMUM WIRE INSULATION RECOMMENDED FOR USE WITH THIS PLUG IS 1,73 DIA. MAX..

3 RETENTION TINES ARE AN INTEGRAL PART OF INSERT.

4 CONTACTS SHOWN FOR ILLUSTRATION ONLY,NO PART OF CONNECTOR PACKAGE,MUST BE ORDERED SEPARATELY.

5 FOLLOWING INSERTION/REMOVAL TOOLS ARE RECOMMENDED FOR USE WITH THESE CONNECTORS:

32-28AWG/28-24AWG CONT's	24-20AWG CONTACTS
91067-3 INSERTION/REMOVAL	91067-2 INSERTION/REMOVAL
726363-1 INSERTION ONLY	726363-1 INSERTION ONLY
	726364-1 REMOVAL ONLY

SEE DRAWING	SEE DRAWING	215488-1
FINISH	MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –

FINISH –

DWN B.MOOIJ 02SEP86
CHK C.V.TILBURG. 08SEP86
APVD L.V.SOEST. 01OCT86
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

Tyco Electronics
Tyco Electronics Corporation
's-Hertogenbosch, Nederland

NAME
HDP-20 PLUG CONNECTOR, SIZE 3, (25 POSITION) WITH SOLDER TAB.

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-215488	—

CUSTOMER DRAWING | SCALE NTS | SHEET 1 OF 1 | REV B1