


CONTACT ORIENTATION
ON REEL FOR AUTO
CRIMP MACHINE

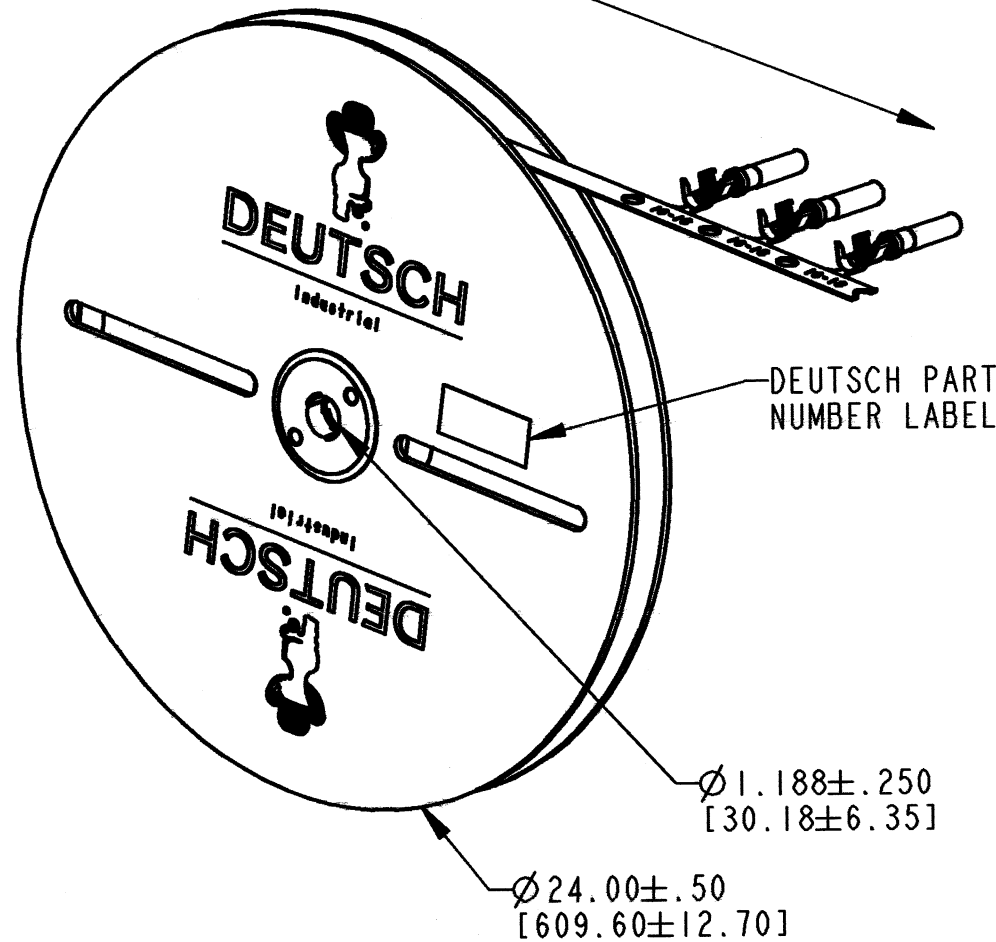


REV
H


1062-16-01 * *

REVISIONS


SYM	DESCRIPTION	DATE	APPROVED
E	REDESIGNED/REDRAWN PER E.O. PI6391	11-05-99	R.D.R.
F	REVISED PER E.O. PI6998	12-08-00	R.D.R.
G	REVISED PER E.O. PI9555	7-11-07	R.D.R.
H	REVISED PER E.O. P20396	6-25-10	RDR

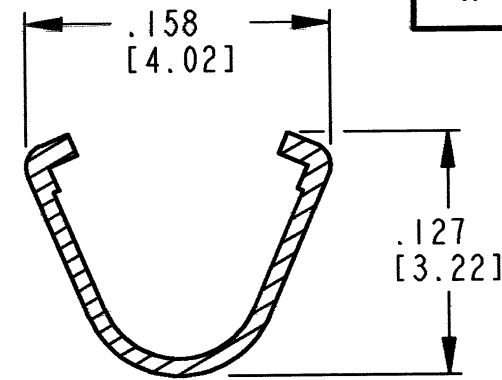

SECTION A-A
CONDUCTOR WINGS

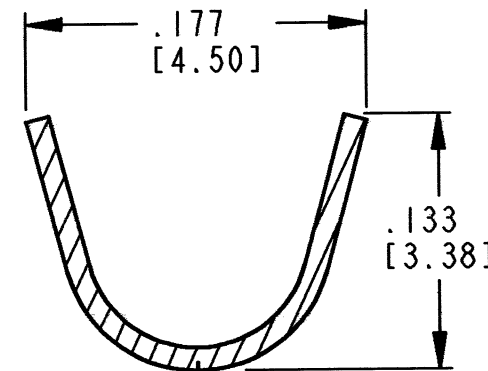

SECTION B-B
INSULATION WINGS

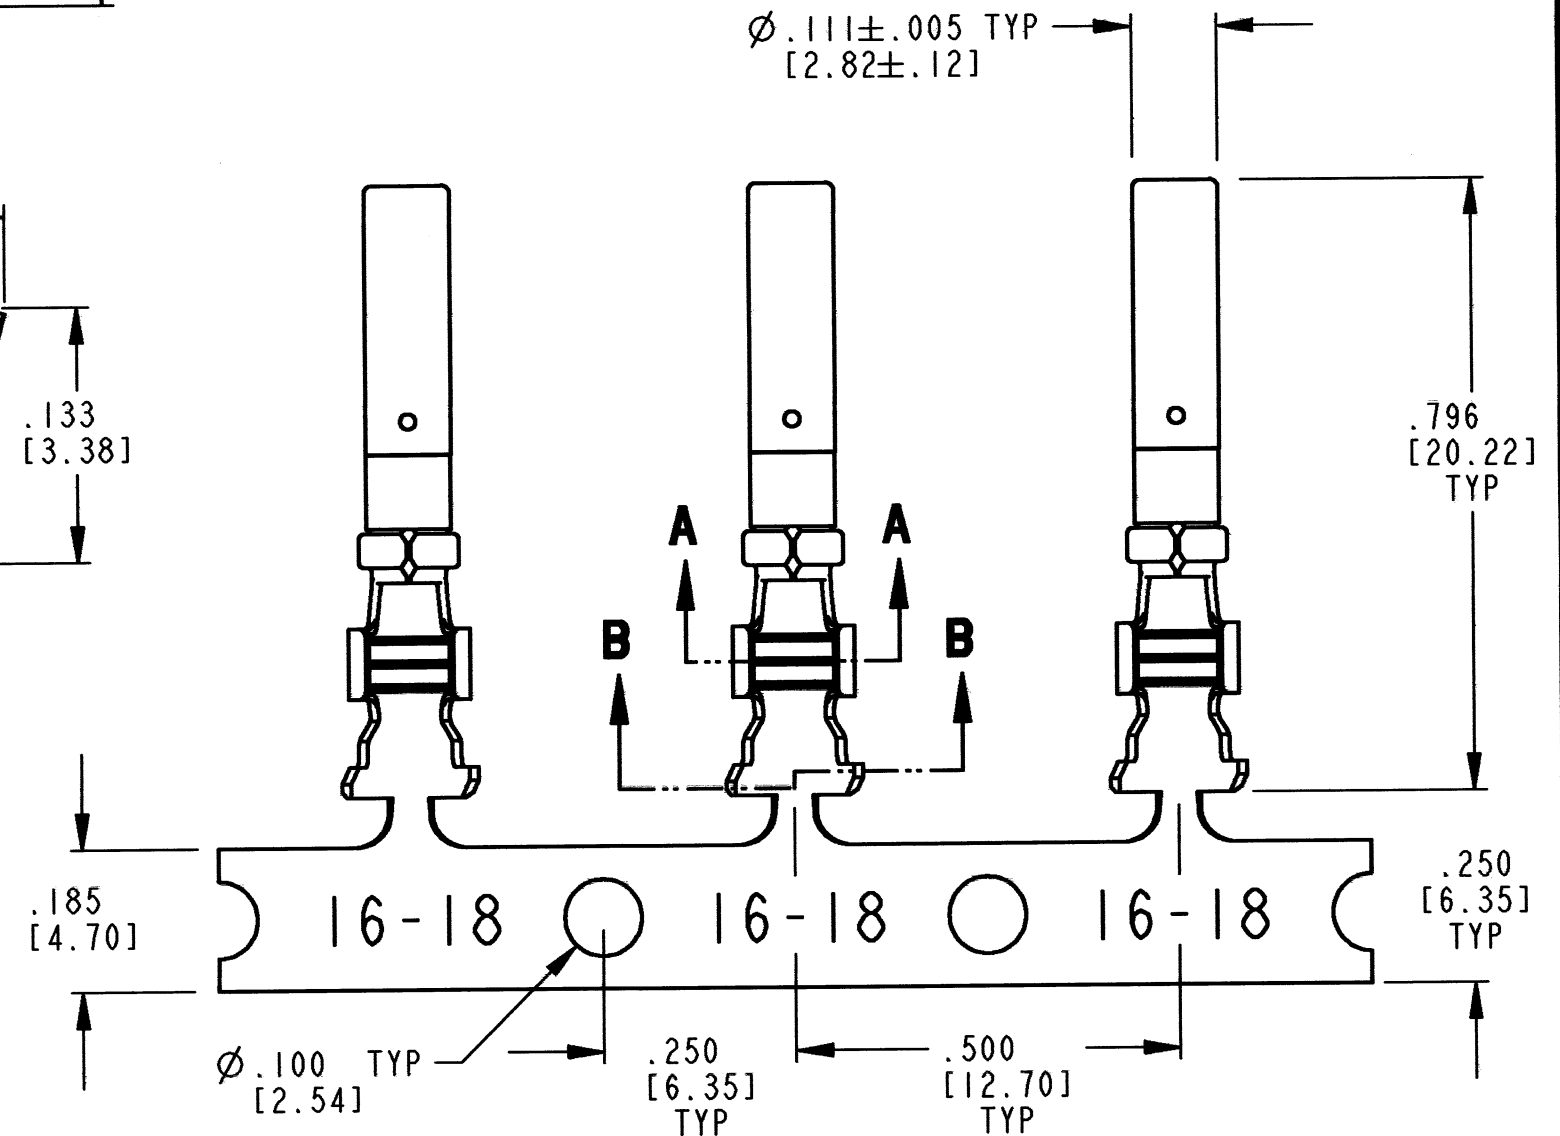

- CONTACT BODY MATERIAL: COPPER ALLOY;
CONTACT SLEEVE MATERIAL: STAINLESS STEEL.
- WHEN ** = 22 PLATING IS NICKEL.
** = 44 PLATING IS GOLD.
** = 77 PLATING IS TIN.
- SEE 0425-015-0000 FOR CONTACT PERFORMANCE AND
WIRE APPLICATION CHARACTERISTICS.
- THIS CONTACT MAY BE CRIMPED WITH DCT16-02-00 AUTOMATIC
DIE, DTT-16-00 OR DTT-16-01 HAND TOOLS. SEE DRAWING
0425-203-0000 FOR APPLICABLE WIRE SIZE, INSULATION
DIAMETER RANGE, AND CRIMPING INFORMATION.
- ONE REEL CONTAINS APPROXIMATELY 4000 CONTACTS.
- DIMENSIONAL TOLERANCE: $\pm .025$ [0.63].
- DIMENSIONS ARE IN INCHES [mm].

NOTES: UNLESS OTHERWISE SPECIFIED

SIGNATURE & DATE	
DR	J. APOSTOL 03DEC2009
CHK	D. Mew 6/25/10
PE	D. Mew 6/25/10
APPD	R. Reed 6-25-10
SCALE	NONE
WT	

STAMPED CONTACT
SOCKET
SIZE 16

ENVELOPE

EP	MATL. CODE
3850 INDUSTRIAL AVE. HEMET, CA 92545	
B	1062-16-01 * *
DWG SIZE	CODE 11139
SHEET	OF