

Circular Plastic Connector Sealing Accessories

Sealing Caps

for Receptacles only

Sealing caps are used to protect exposed contacts of unmated receptacles.


Material and Finish

Cap—Thermoplastic, heat stabilized, fire resistant, self-extinguishing, 94V-1 rated, black

Sealing Gasket—Neoprene, black

Bead Chain—Steel, nickel plated

Bead Chain Coupling—Brass, plated nickel

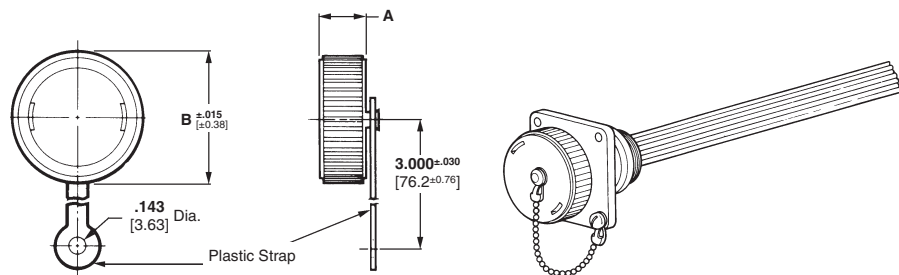


Shell Size	Series	Dimensions		Plastic Strap Part No.	Metal Bead Chain Part No.
		A	B		
11	1 & 2	.360 9.14	.927 23.55	206903-1	208800-1
13	1	.360 9.14	1.055 26.80	211870-1	213485-1
17	1,2,& 3	.360 9.14	1.295 32.89	207445-1	208652-1
23	1, 3, & 4 2	.460 11.68	1.728 43.89	207446-1	208680-1
				207446-2	208680-2

Cable Entry Seals

Heat Shrinkable Sealing Boots

Cable entry seals are used with jacketed cable to provide an environmentally sealed wire-to-connector system. They can be used with either plugs or receptacles.

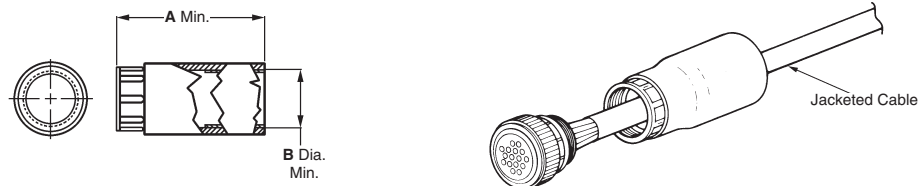



Shell Size	Dimensions		Expanded Wall Thickness	Sealing Range (Dia.)	Max. Recovered Inside Diameter	Part No.
	A	B				
11	2.500	.625	.050	.250 - .600	.160	54010-4
	63.50	15.88	1.27 Ref.	6.35 - 15.24	4.06	
13	2.500	.775	.060 Ref.	.250 - .375	.250	54010-1
					6.35	
	63.50	19.68	1.52	6.35 - 9.53	.220	54123-2
	.375 - .725	.300	54123-1			
9.53- 18.42		7.62				
17	2.500	.975	.060 Ref.	.400 - .875	.375	54011-1
	63.50					24.76
	3.000					54011-3
	76.20					
23	3.000	1.250	.070 Ref.	.550 - 1.250	.500	54012-1
	76.20	31.75	1.78	13.97 - 31.75	12.70	

Thick Wall Boots

Material

Internal Sleeve—Nylon

Outer Tubing—Polyolefin, black

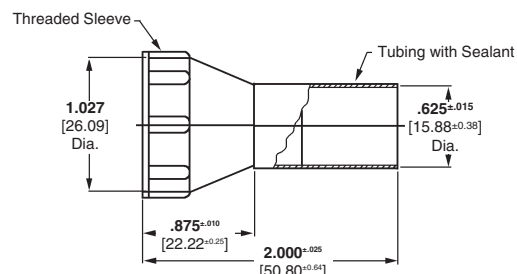

Shell Size 17
Part No. 213933-1

Thin Wall Boot

Material

Inter Sleeve—Nylon

Outer Tubing—Polyolefin

Expanded Wall Thickness—
.020 [0.51]

Max. Recovered Wall Thickness—
.040 [10.16]

Sealing Range—.250 [6.35]-
.500 [12.70] Dia.