

Einzelader-
abdichtungen


Single Wire
Sealings



Material:
Neopren (CR)
Silikon (Sil)

Temperaturbereich:
-40°C bis 105°C

Farbe(n)/Ausführungen:
• schwarz, rotbraun
• 8-Loch mit Abreißnoppen

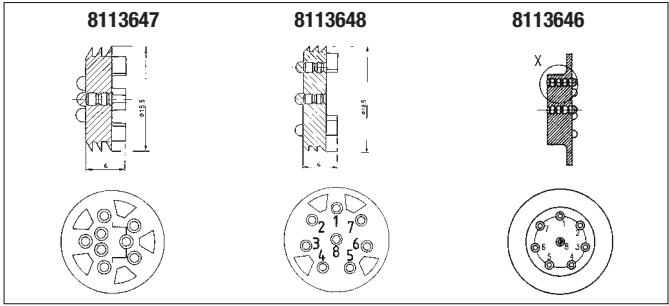

Material:
Neoprene (CR)
Silicone (Sil)

Temperature range:
-40°C to 105°C

Colour(s)/Designs:
• black, red-brown
• 8-holes with tear off nipples

Ø mm	Farbe	passend für/suitable for				Art.-Nr.	VE Stck.
		3-/5-poliges Stift-/Buchsengehäuse mit Außengewinde PG 11	8-poliges Stiftgehäuse	Gerader Kegel/ Winkelkegel mit Außengewinde PG 11	Gerader Kegel/Winkelkegel mit Bajonett 16S (Art.-Nr. 9800611/9800603) in Kombination mit 8-pol. Buchsengehäuse (Art.-Nr. 7805098/7805080)		
Ø mm	Colour	3-/5-pole pin/jack housing with external thread PG 11	8-pole pin housing	Straight/angle cone with external thread PG 11	Straight/angle cone with bayonet 16S (Art. no. 9800611/9800603) in combination with 8-pol. jack housing (Art. no. 7805098/7805080)	Art. no.	PU pcs.
15,5	schwarz/black (CR)	✓		✓	✓	8113647	50
18,5	schwarz/black (CR)		✓			8113648	50
27,0	rotbraun/red-brown (Sil)				✓	8113646	50

Klemmdichtringe

Clamp Sealings



Material:
Neopren


Temperaturbereich:
-40°C bis 105°C

Farbe(n)/Ausführungen:
• schwarz

Material:
Neoprene

Temperature range:
-40°C to 105°C

Colour(s)/Design:
• black



für NW Normalprofil for NW normal profile	a a	b b	c c	Art.-Nr. Art. no.	VE Stck. PU pcs.
8,5	17,5	11,5	5,0	8117080	1000
10	17,0	12,8	6,38	8117101	1000
13	20,0	15,8	5,38	8117136	1000
17	24,5	20,5	6,64	8117179	1000
22	33,0	25,2	7,0	8117225	500
23	33,0	28,1	7,0	8117233	500
29	39,0	34,3	7,54	8117292	500