

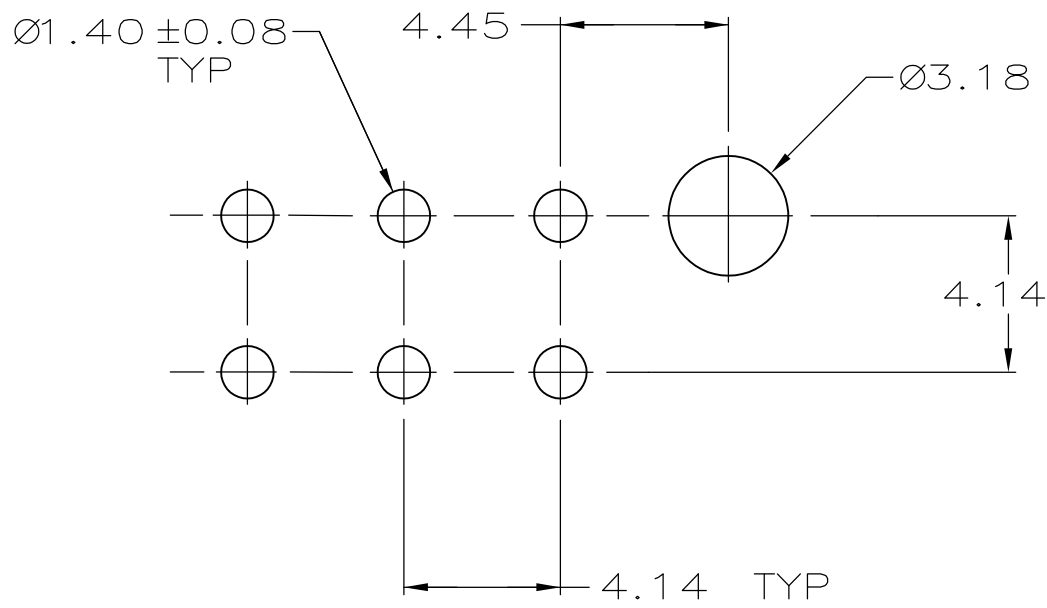
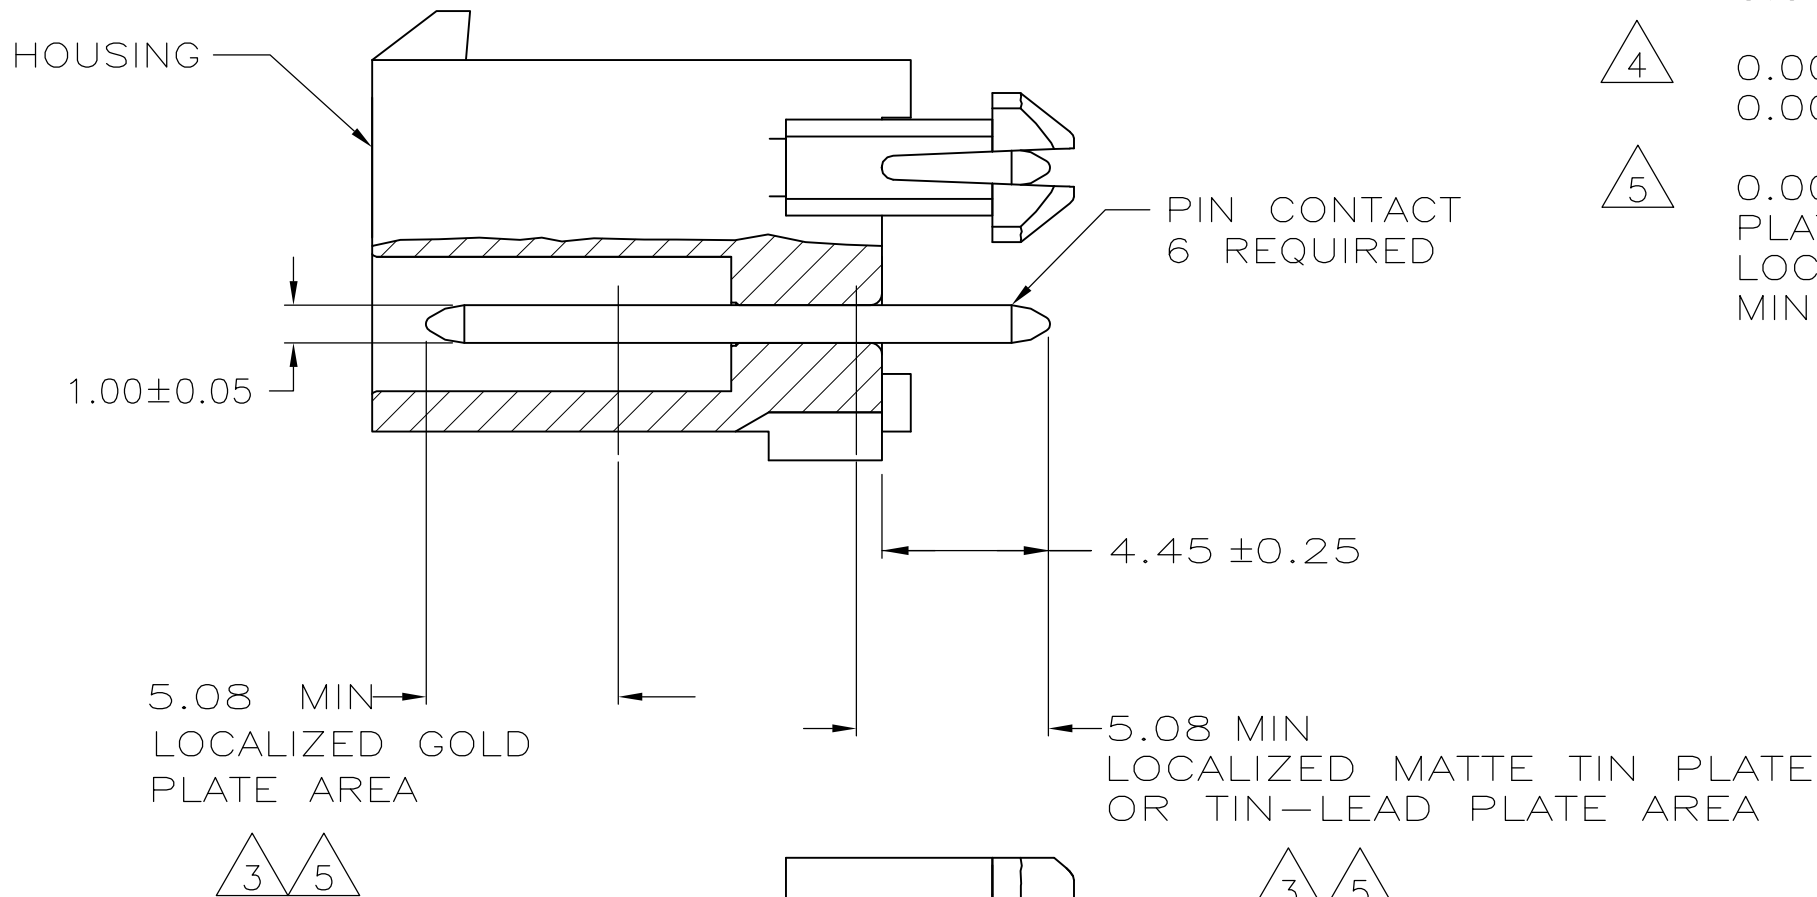


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	0		M	REVISED PER ECR-15-010337	22JUL2015	RK	SC


- 1 PINS TO COMPLY WITH AMP SOLDERABILITY SPEC. 109-11-3.
- 2 0.00381 MIN MATTE TIN LEAD PLATE OVER 0.00127 MIN NICKEL.
- 3 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN LEAD IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.
- 4 0.00381 MIN MATTE TIN PLATE OVER 0.00127 MIN NICKEL.
- 5 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.

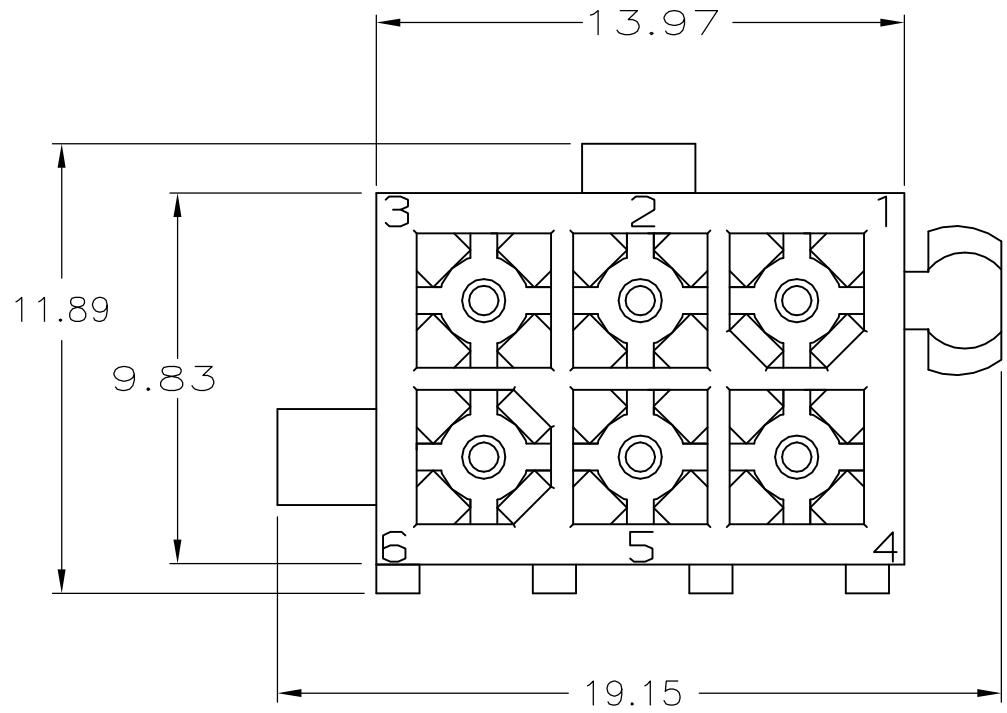

RECOMMENDED LAYOUT FOR 1.57 THICK BOARD
TOLERANCES NON-ACCUMULATIVE

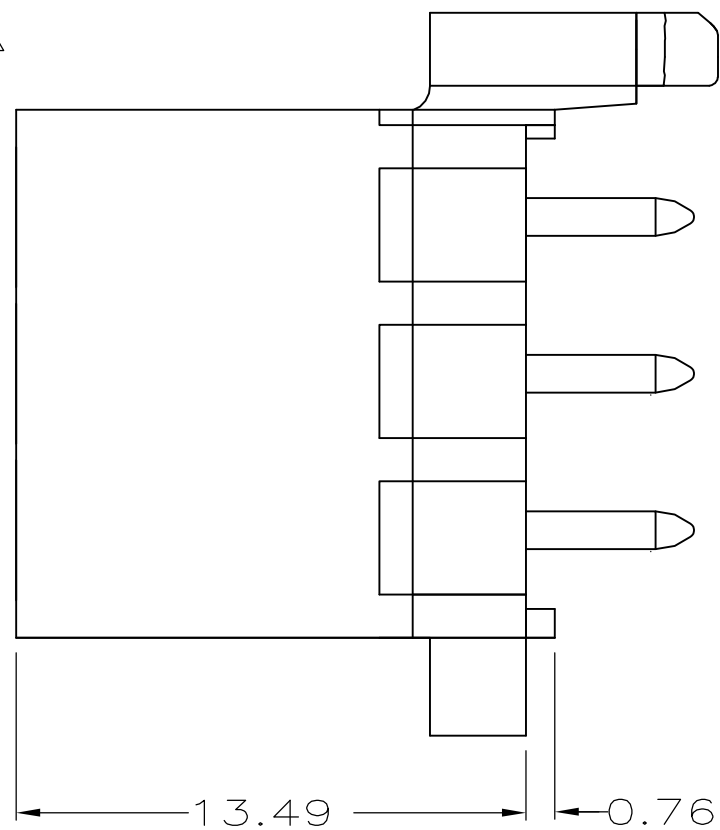

BRASS, TIN	4	NYLON, UL94V-0	BLACK	5-770178-0
BRASS, GOLD	5	NYLON, UL94V-0	WHITE	1-770178-1
BRASS, TIN	4	NYLON, UL94V-0	WHITE	1-770178-0
BRASS, GOLD	3	NYLON, UL94V-0	WHITE	770178-2
BRASS, TIN-LEAD	2	NYLON, UL94V-0	WHITE	770178-1
MATERIAL	FINISH	MATERIAL	COLOR	PART NO.
PIN		HOUSING		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S CARPENTER CHK R JONES APVD R JONES PRODUCT SPEC APPLICATION SPEC — WEIGHT — CUSTOMER DRAWING	08JUN05 28JUL2003 28JUL2003	 TE Connectivity	
DIMENSIONS: mm	TOLERANCES, UNLESS OTHERWISE SPECIFIED:	NAME			HEADER ASSEMBLY, 6 CKT, MINI UNIVERSAL, MATE-N-LOK
	0 PLC ± —	SIZE			CAGE CODE
	1 PLC ± —	DRAWING NO			RESTRICTED TO
	2 PLC ± 0.13	A2			00779
	3 PLC ± —	C=770178			—
	4 PLC ± —	SCALE			5:1
MATERIAL —	FINISH —	SHEET			1 of 1
		REV			M