

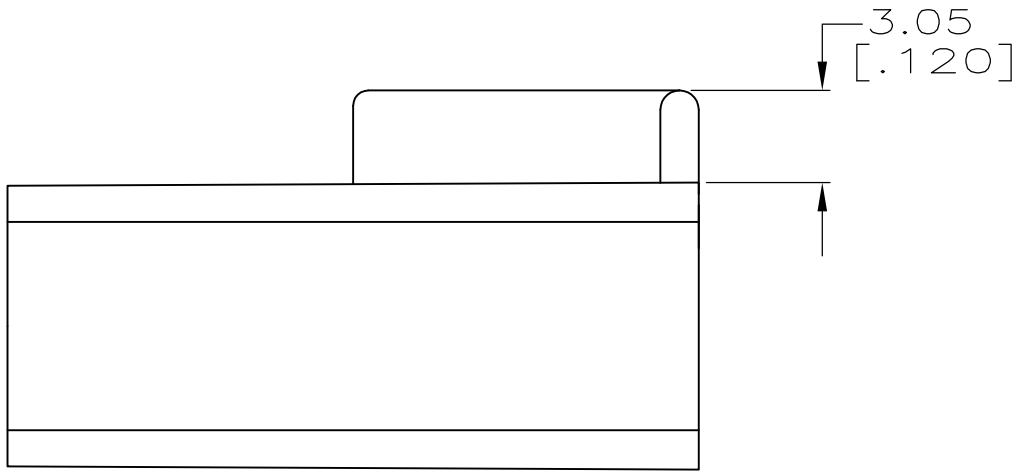



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50		K12	REVISED PER ECR-12-014529	21AUG12	KH	PD

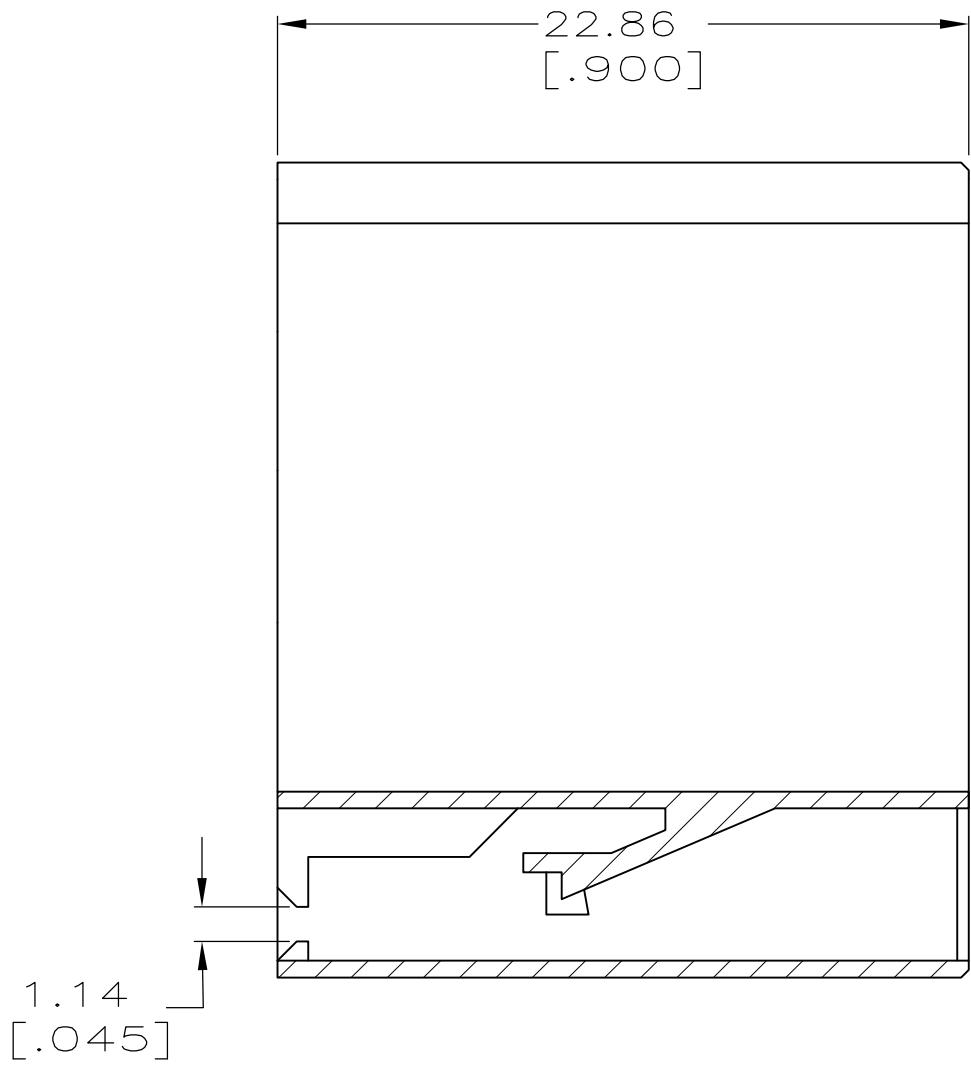

- 1
- FOR USE WITH TE CONNECTIVITY 250 SERIES LOW INSERTION RECEPTACLES.
- 2
- PRELIMINARY – NOT FOR PRODUCTION.
- 3
- GLOW WIRE APPROVED, CONTACT TE CONNECTIVITY FOR ENGN SPECIFICATIONS, ALL WALL THICKNESSES ARE BETWEEN 0.4mm AND 3.0mm.

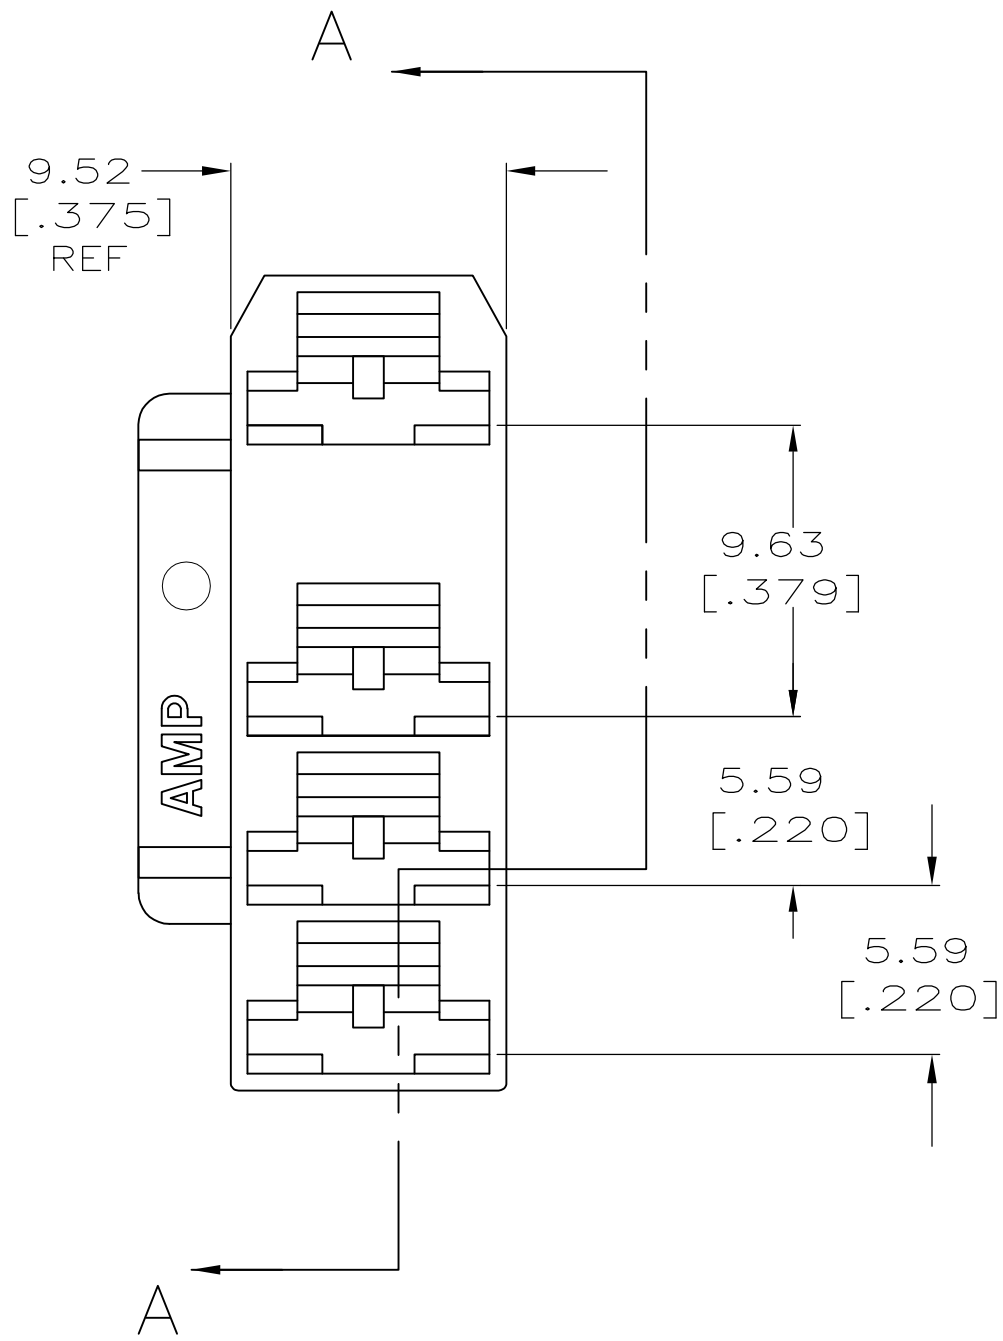

SECTION A—A

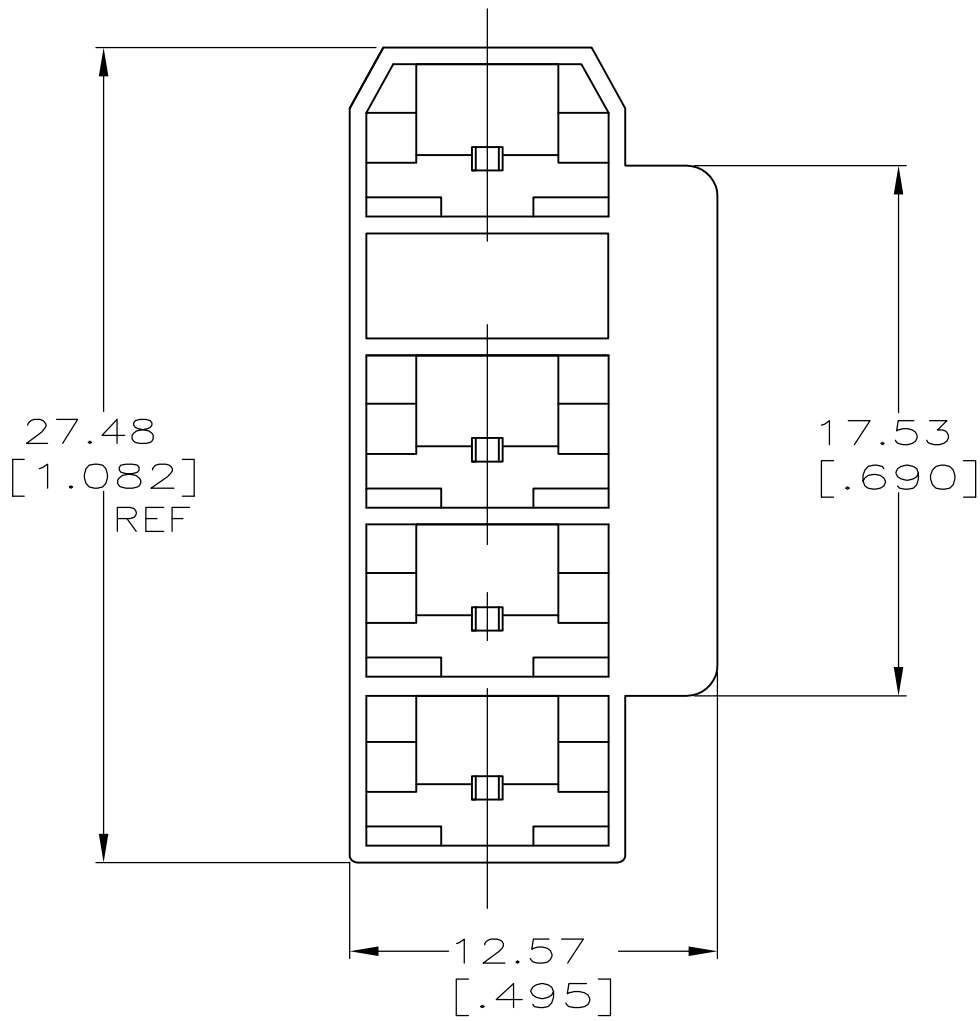

NATURAL	3 66 NYLON, V0	2 520987-7
NATURAL	V2 3	520987-6
NATURAL	66 NYLON, V0	520987-5
BLACK	66 NYLON, V0	520987-4
GRAY	6/6 NYLON, V2	2 520987-3
NATURAL	6/6 NYLON	520987-2
BLACK	6/6 NYLON	520987-1
COLOR	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.S. FEHER 22SEP2003	 TE Connectivity			
		CHK J.R. RUTH 22SEP2003				
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD P. DESANTIS 22SEP2003	NAME HOUSING,RECEPTACLE, FASTON,6.35 [.250] SERIES			
	0 PLC ± -	PRODUCT SPEC				
	1 PLC ± -	—				
	2 PLC ± -	APPLICATION SPEC				
	3 PLC ± 0.25 [.010]	—				
	4 PLC ± -	WEIGHT -	SIZE A2	CAGE CODE 00779	DRAWING NO C=520987	RESTRICTED TO -
MATERIAL SEE TABLE	FINISH SEE TABLE	CUSTOMER DRAWING		SCALE 4:1	SHEET 1 of 1	REV K12