

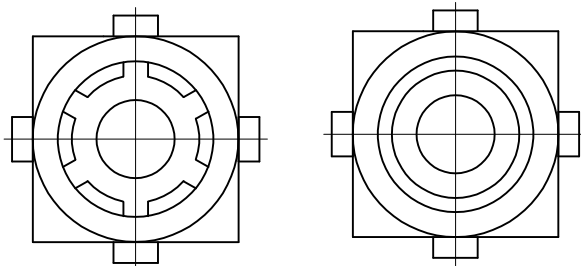
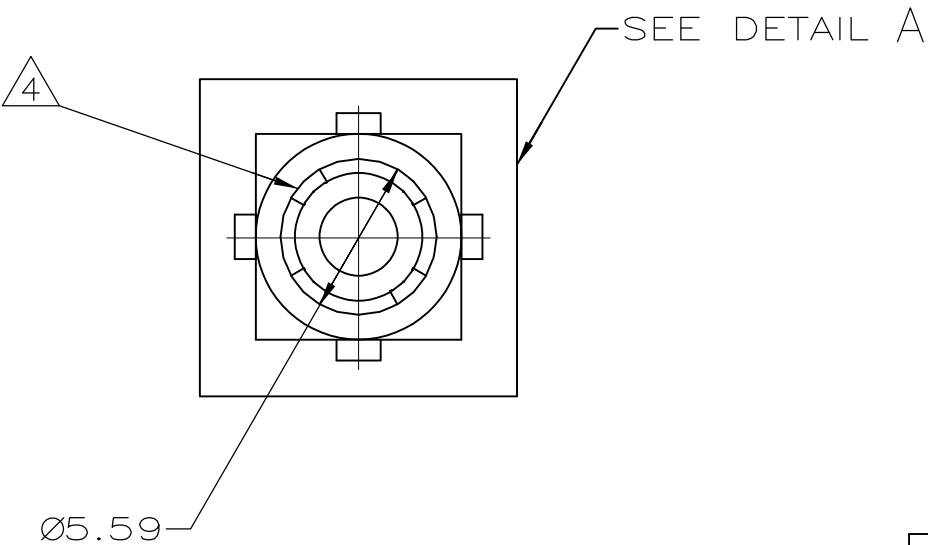
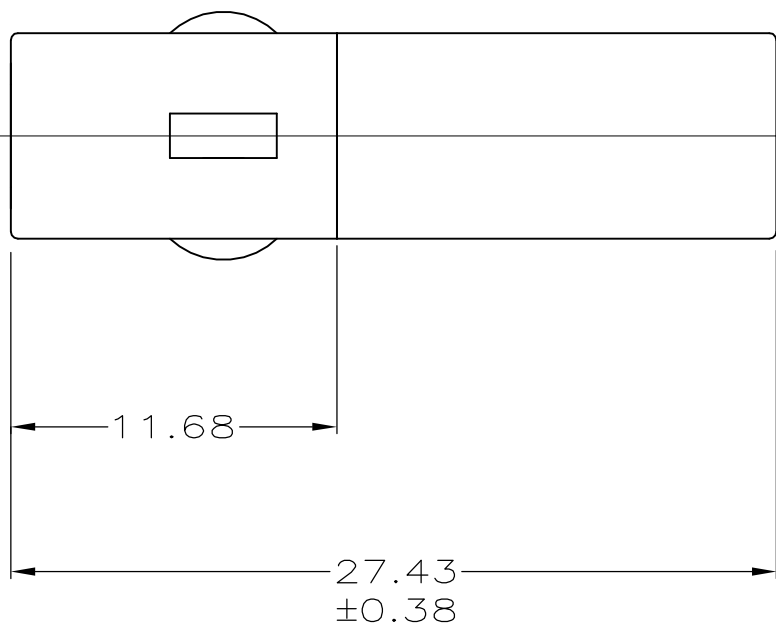


1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ CAP.
2. SMALL NICKS ARE PERMITTED ON THE CIRCUIT TOWER WHICH COULD INCREASE THE INITIAL HOUSING MATING FORCE BY UP TO 2.2 NEWTONS [.5 LBS].
3. DIMENSION INDICATED IS AS MOLDED. ADDITIONAL GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR.
4. FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.

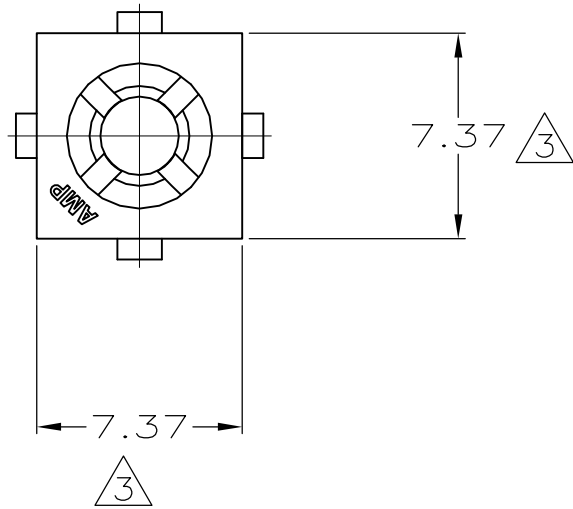

DETAIL A
OPTIONAL CONSTRUCTION

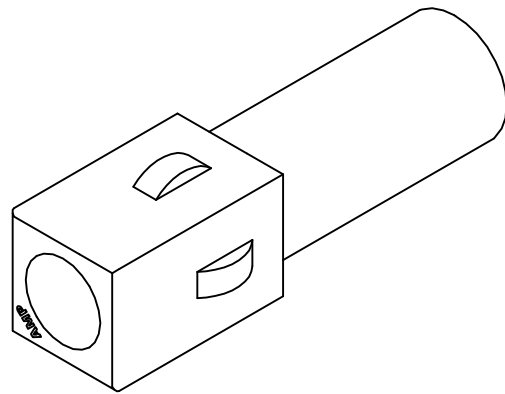

3-DIMENSIONAL MODEL
NTS

27.43	1.080
11.68	.460
7.37	.290
5.59	.220
0.38	.015
0.13	.005
MM	IN
CONVERSION TABLE	

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 3-9-92	TE Connectivity		
DIMENSIONS: mm[INCHES]		CHK R. SWING 3-9-92			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. SELF 3-10-92	NAME PLUG, SINGLE CIRCUIT, UNIVERSAL MATE-N-LOK™		
MATERIAL NYLON,UL 94V-0		PRODUCT SPEC —	SIZE A2		
FINISH —		APPLICATION SPEC —	CAGE CODE 00779		
—		WEIGHT —	DRAWING NO C-350865		
—		CUSTOMER DRAWING	RESTRICTED TO —		
—		SCALE 4:1	SHEET 1 OF 1		
—		REV R1	—		