


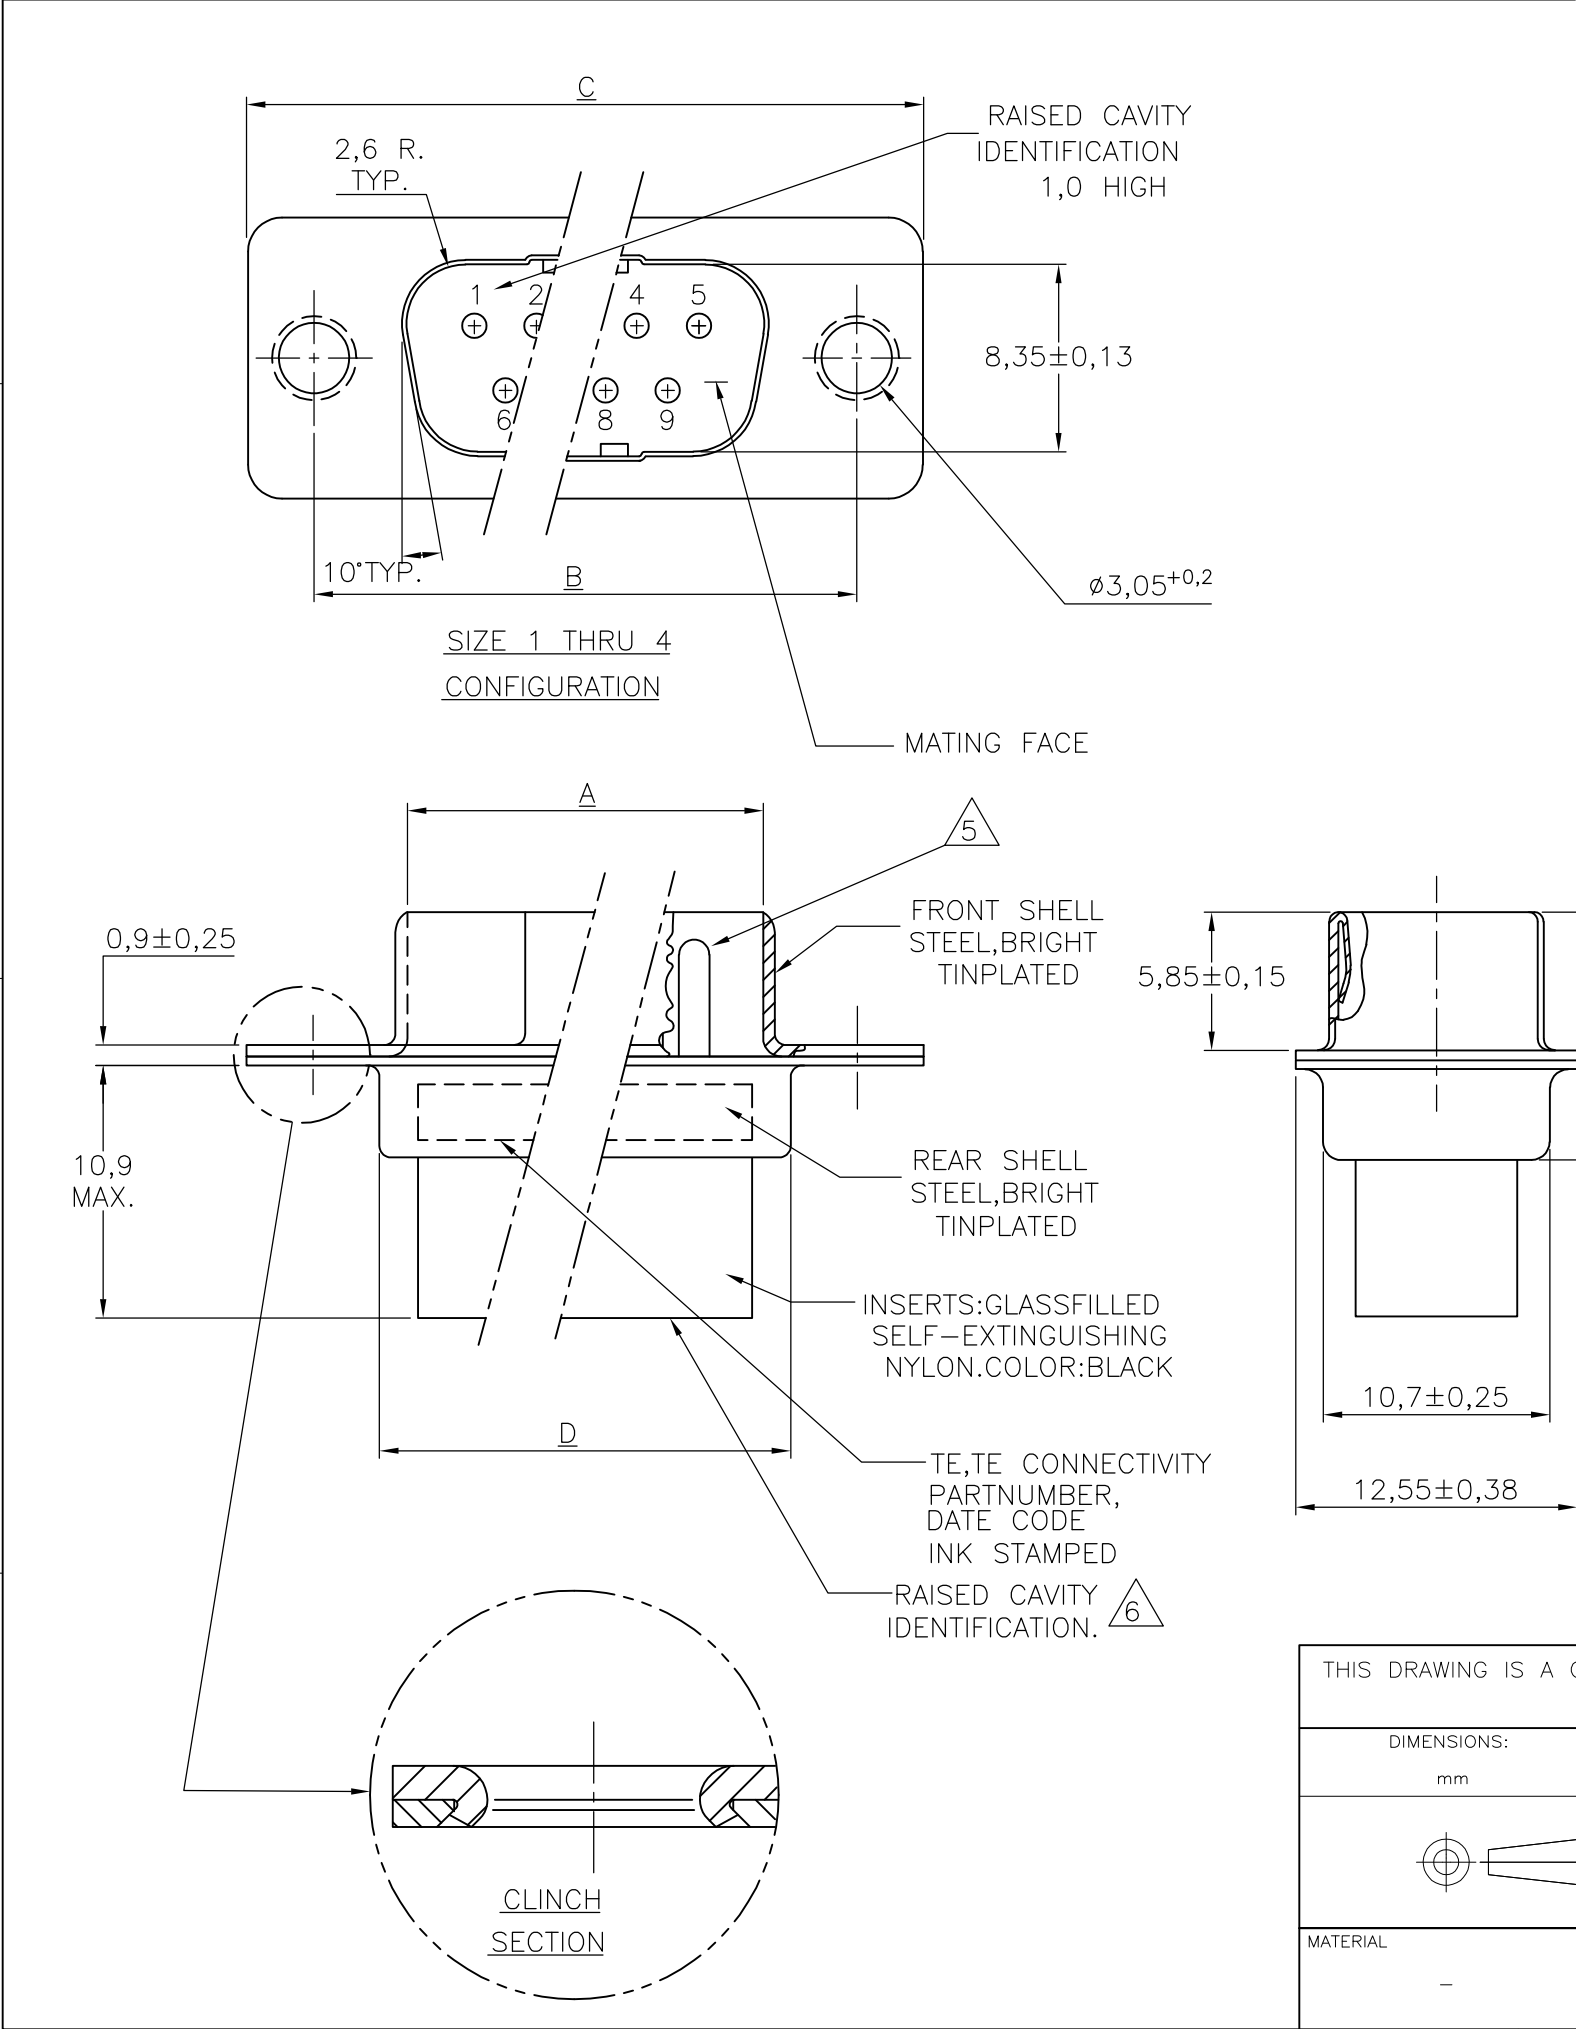

NOTES:

- 1 THIS PLUG ACCEPTS SIZE 20 PIN CONTACTS.

2 MAXIMUM WIRE INSULATION RECOMMENDED FOR USE WITH THIS PLUG IS 1,73 DIA. MAX..

3 RETENTION TINES ARE AN INTEGRAL PART OF INSERT.


4 FOLLOWING INSERTION/REMOVAL TOOLS ARE RECOMMENDED FOR USE WITH THESE CONNECTORS:

32-28AWG/28-24AWG CONT's	24-20AWG CONTACTS
91067-3 INSERTION/REMOVAL	91067-2 INSERTION/REMOVAL
726363-1 INSERTION ONLY	726363-1 INSERTION ONLY
	726364-1 REMOVAL ONLY
- 5 CONTACTS SHOWN FOR ILLUSTRATION ONLY, NO PART OF CONNECTOR PACKAGE ; MUST BE ORDERED SEPARATELY.

6 RAISED CAVITY IDENTIFICATION NUMBERS ON WIRE SIDE ARE WHITENED FOR -9 P/N'S.

						OBSOLETE	
55,3	66,9	61,1	52,9	50	5	167296-9	167296-1
57,7	69,3	63,5	55,4	37	4	167295-9	167295-1
41,3	53,0	47,0	39,0	25	3	167294-9	167294-1
27,5	39,1	33,3	25,3	15	2	167293-9	167293-1
19,3	30,8	25,0	16,9	9	1	167292-9	167292-1
D $\pm 0,25$	C $\pm 0,38$	B $\pm 0,13$	A $\pm 0,13$	NR.OF POS	SIZE	ORDER NUMBER	

FOR DETAILS SIZE 5, SEE SHEET 2.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B.MOOIJ	20NOV87	 TE Connectivity			
		CHK —	—				
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME			
		0 PLC ± — 1 PLC ± 0,2 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± 2°		PRODUCT SPEC			
				APPLICATION SPEC			
MATERIAL —		FINISH —		WEIGHT —		RESTRICTED TO —	
CUSTOMER DRAWING				SCALE NTS		SHEET 1 OF 2	
				REV M2			

A300779

C-167292

