
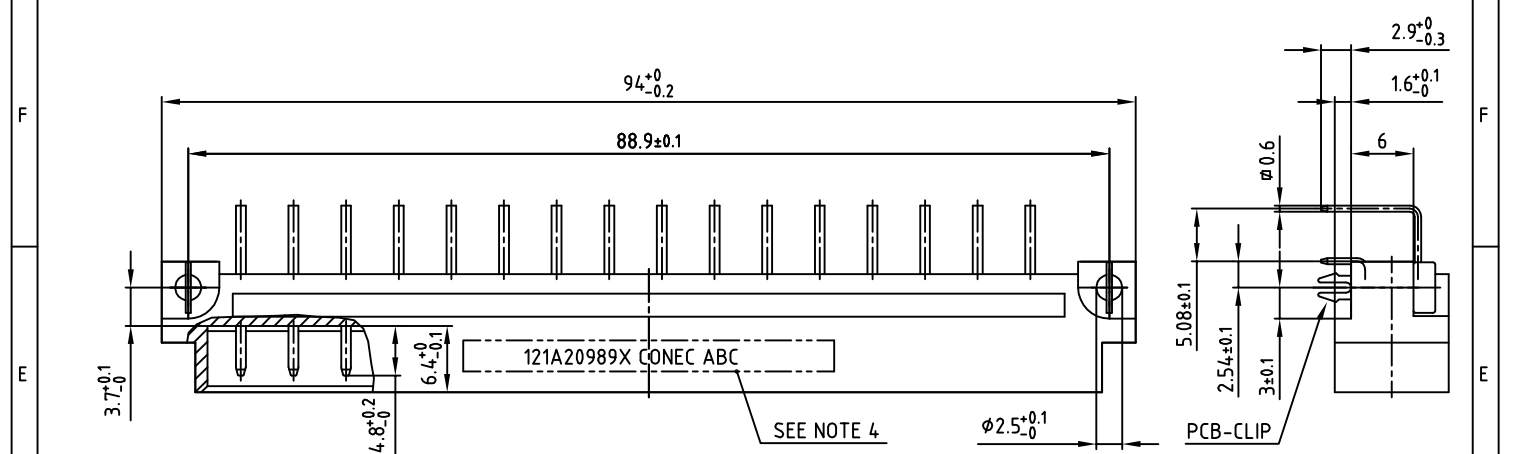


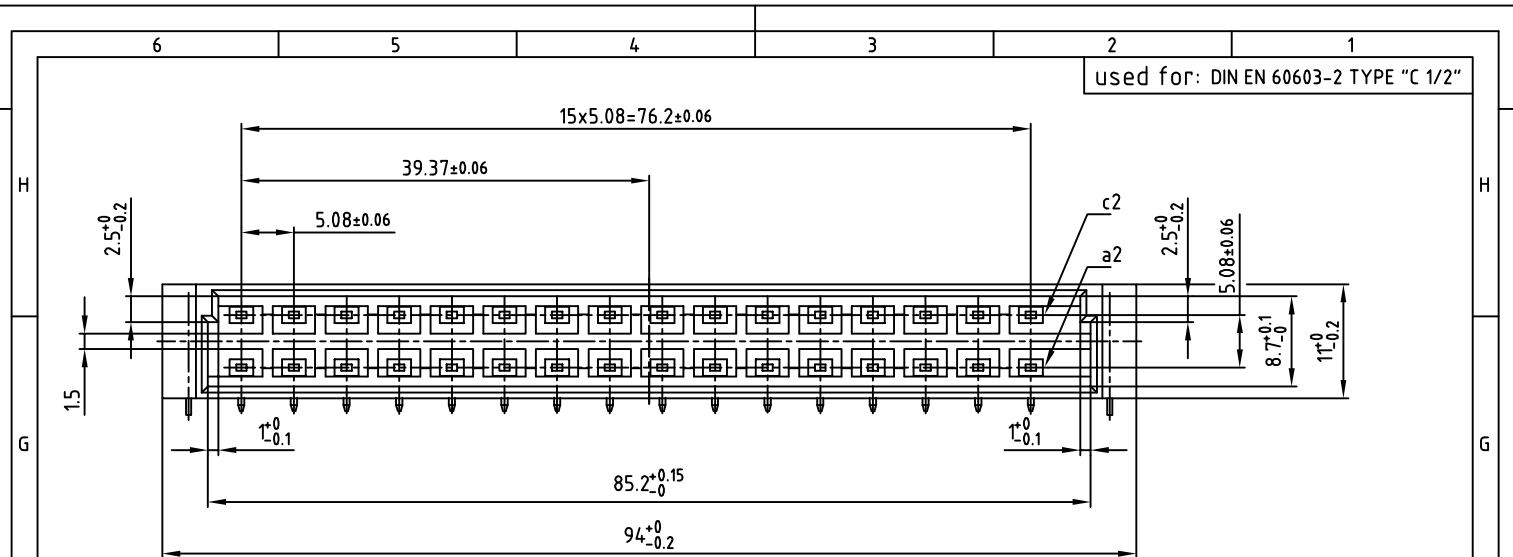


NOTES:

1. INSULATORS: PBT GF UL 94 V-0, GREY
2. CONTACTS: COPPER ALLOY
 PLATING: GOLD FLASH over NICKEL
3. PCB-CLIPS: COPPER ALLOY
 PCB HOLE $\phi 2.8 \pm 0.1$ / PCB THICKNESS $t \approx 1.6\text{mm}$

4. CONNECTOR IS PART MARKED: 121A20989X CONEC ABC

P.C.B.-HOLE DRILLINGS

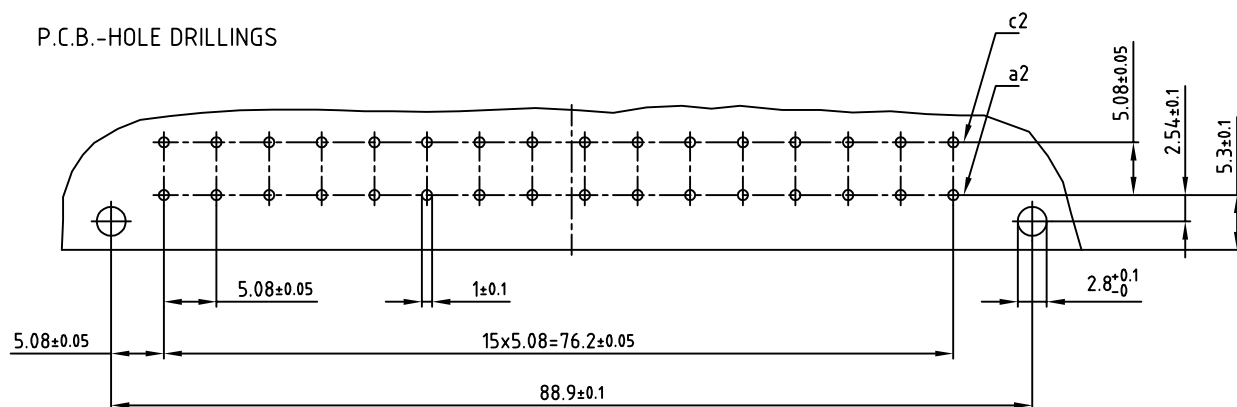

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
NOT ALTER CAD DRAWING BY HAND

				tolerance		 dim. in mm	
				2011	date	name	
				drawn	28.03.	Henneboel	
				appd.	28.03.	Mickenbecker	
				norm	DIN EN 60603-2		
				d-old			
a	Original						
rev.	description	date	name				



scale:	2:1
material:	SEE NOTES

title:	MALE CONNECTOR TYPE "D"
	32pos. ANGLED
	with clip

dwg no:	12K1A722
part no:	121A20989X

DIN-A
3
sh:1/1