
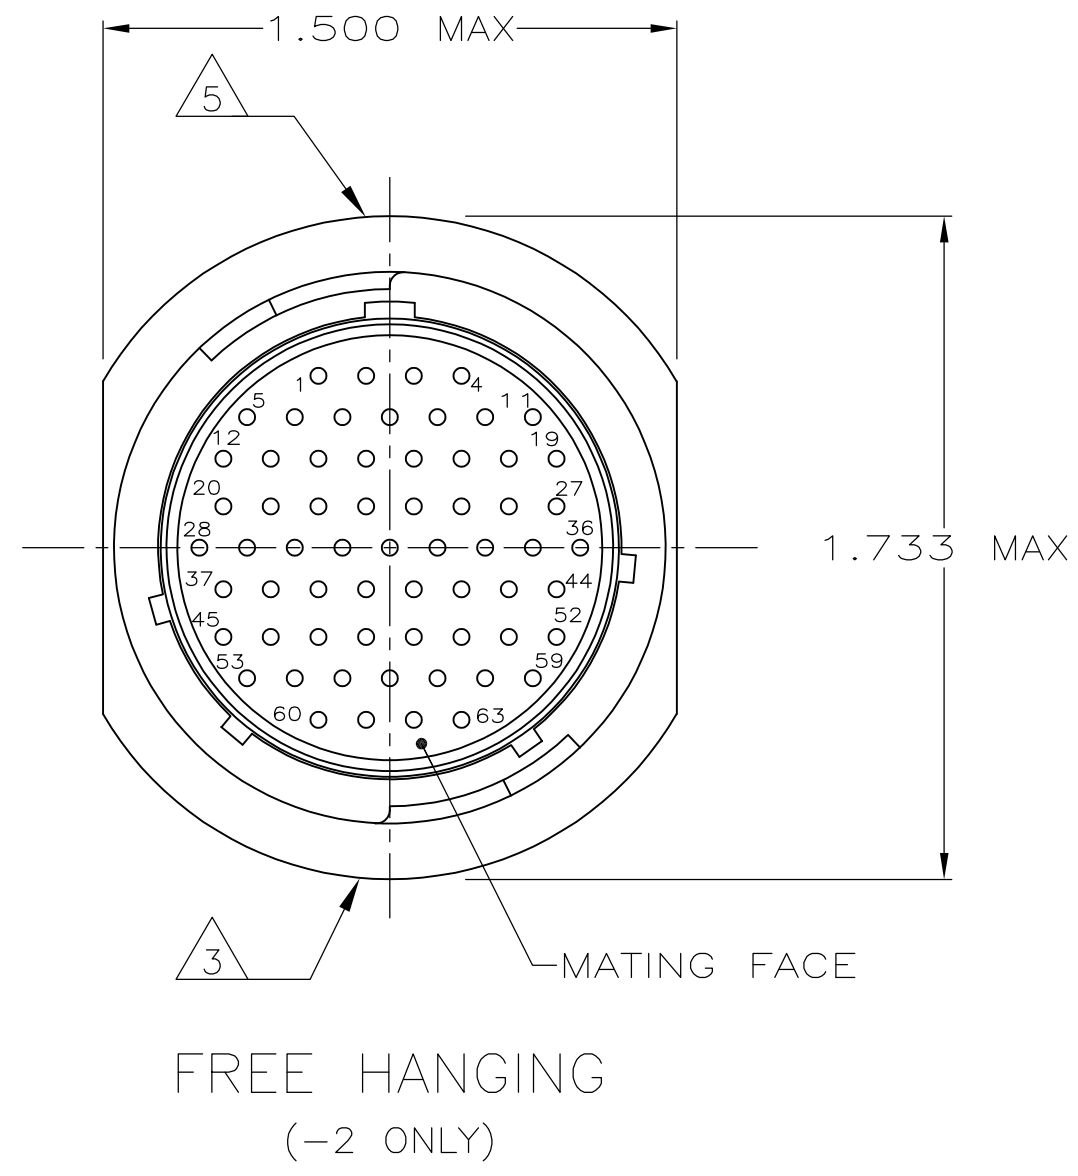
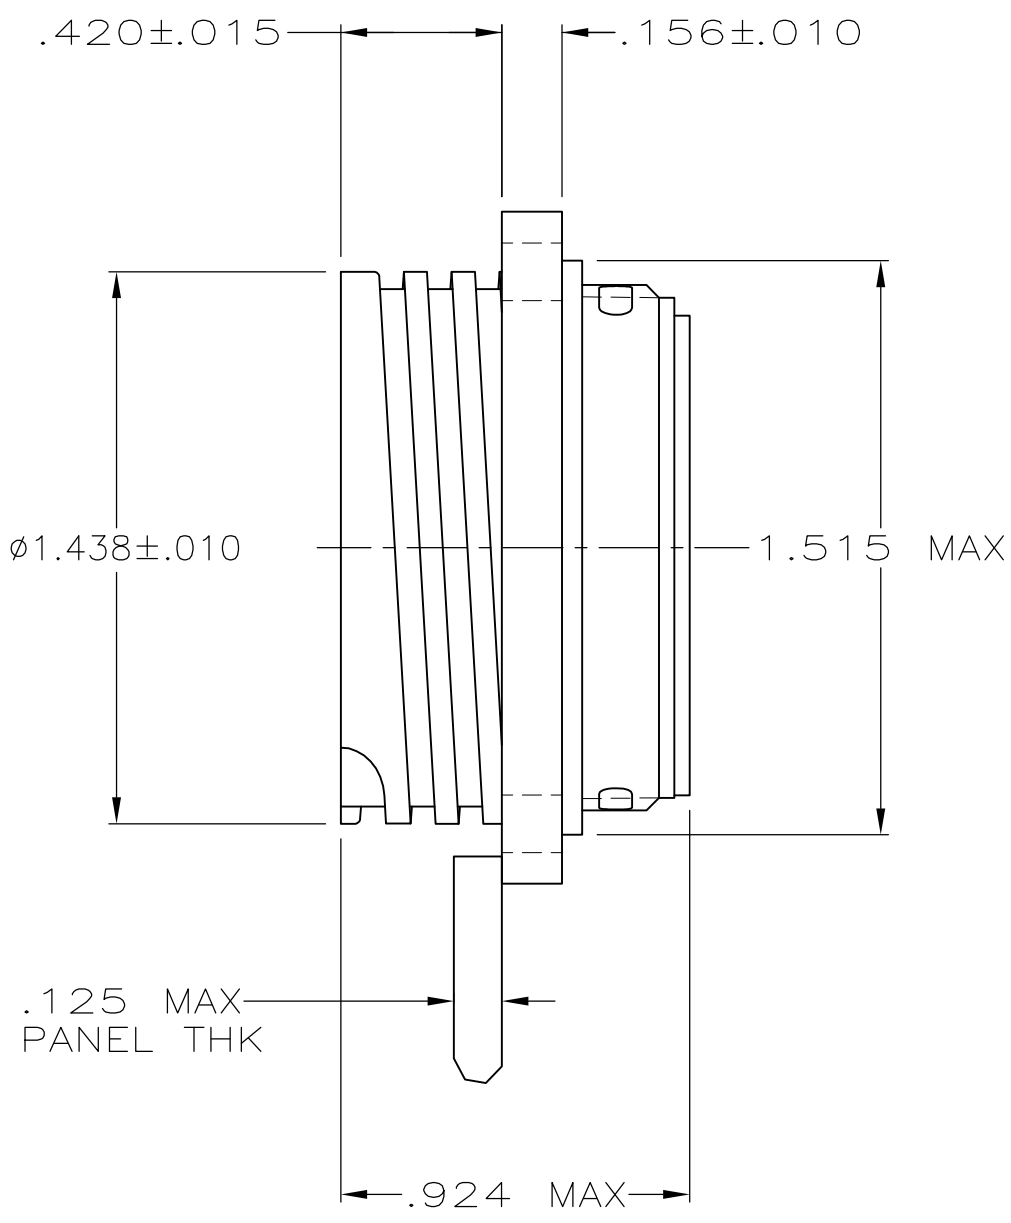


D


C

B

A

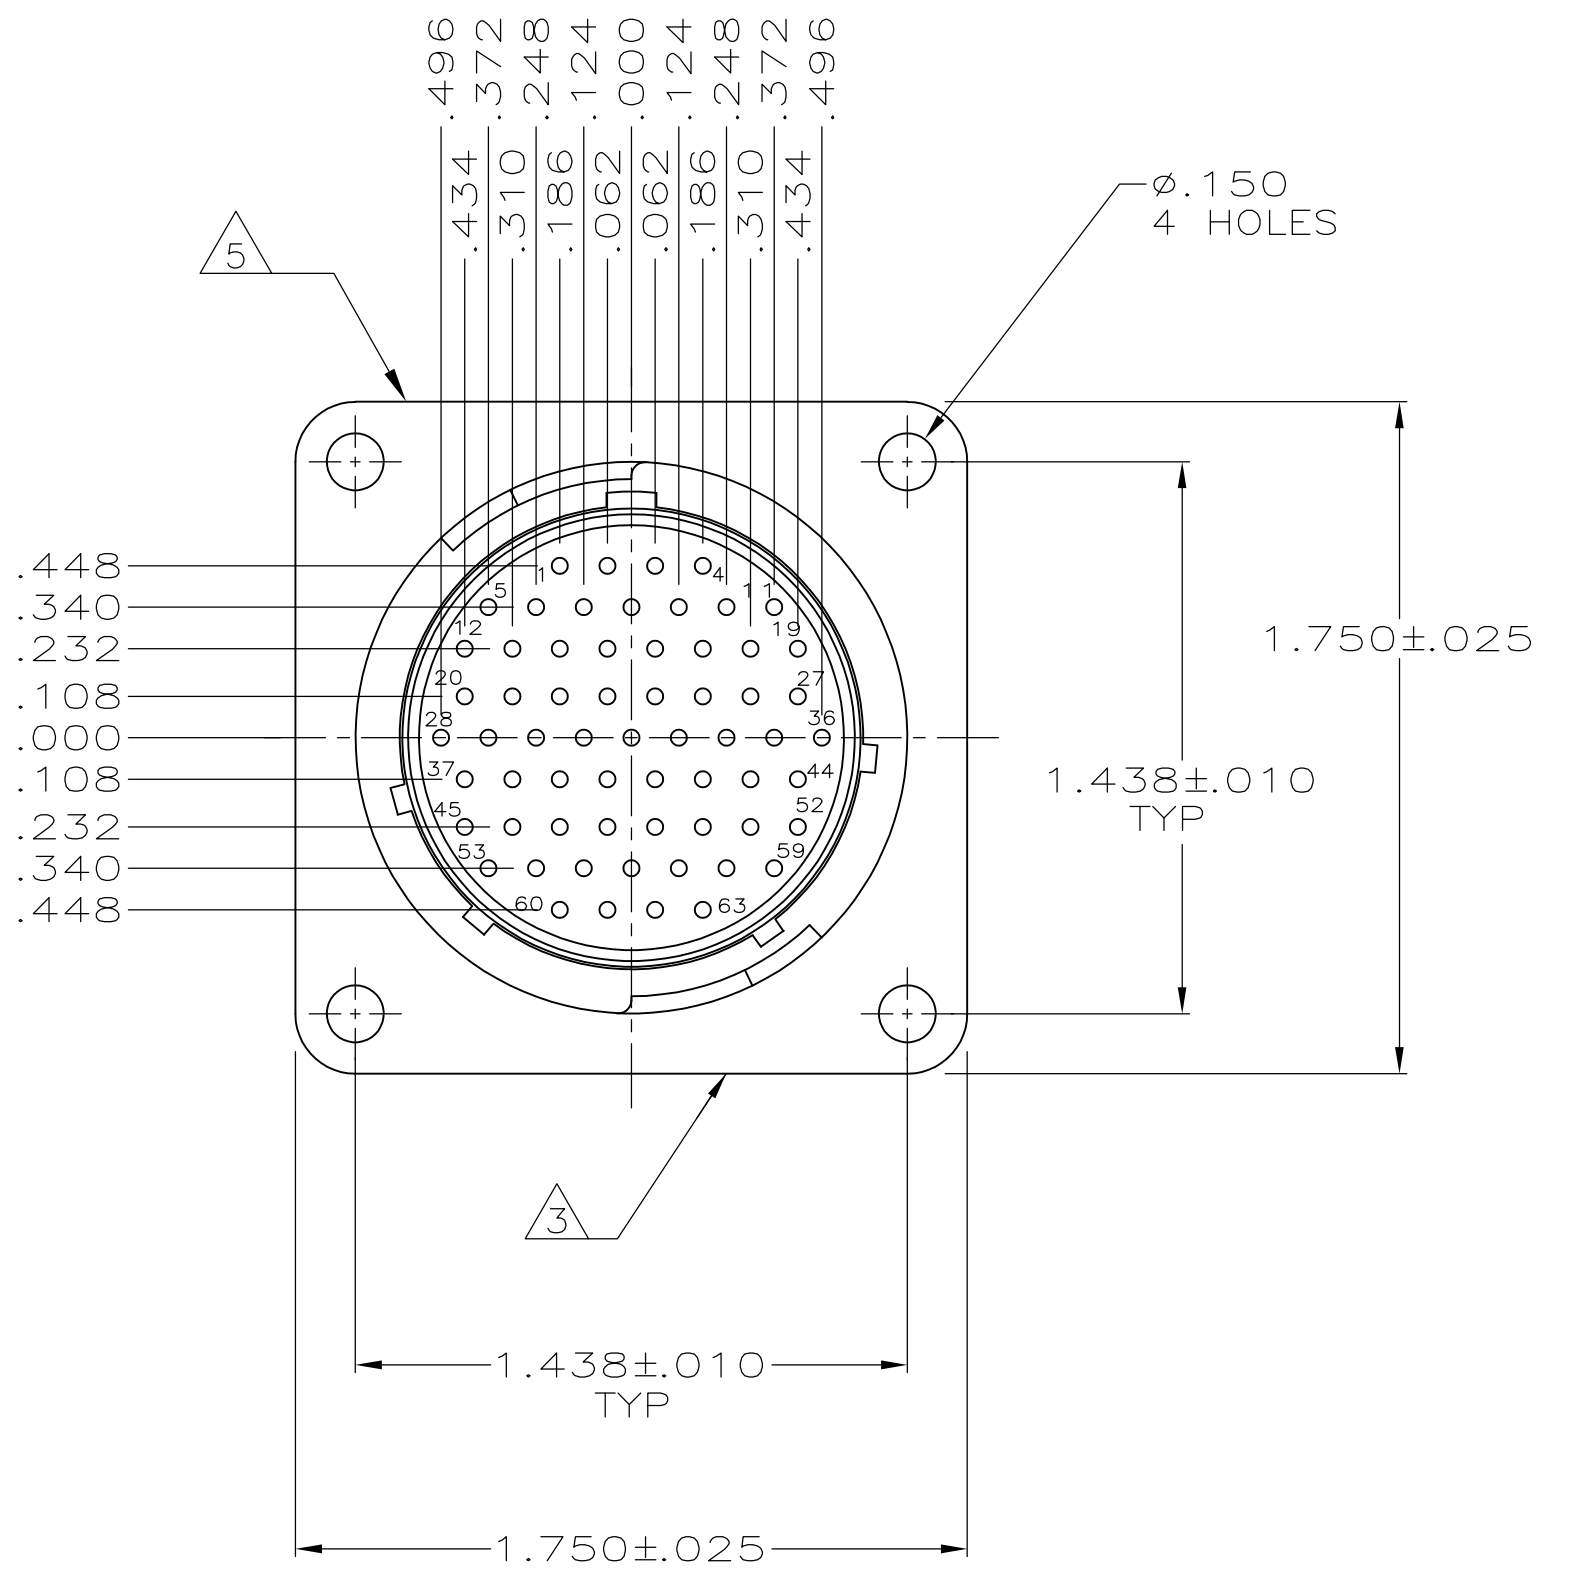

- 1 CONTACT CAVITIES IDENTIFIED BY CHARACTERS ON FRONT AND REAR FACES OF CONNECTOR.
- 2 WILL ACCEPT (63) SIZE 20 PIN CONTACTS.
- 3 AMP ON FLANGE EDGE.
- 4 #4 FASTENER RECOMMENDED FOR MOUNTING.
- 5 PART NUMBER ON FLANGE EDGE.

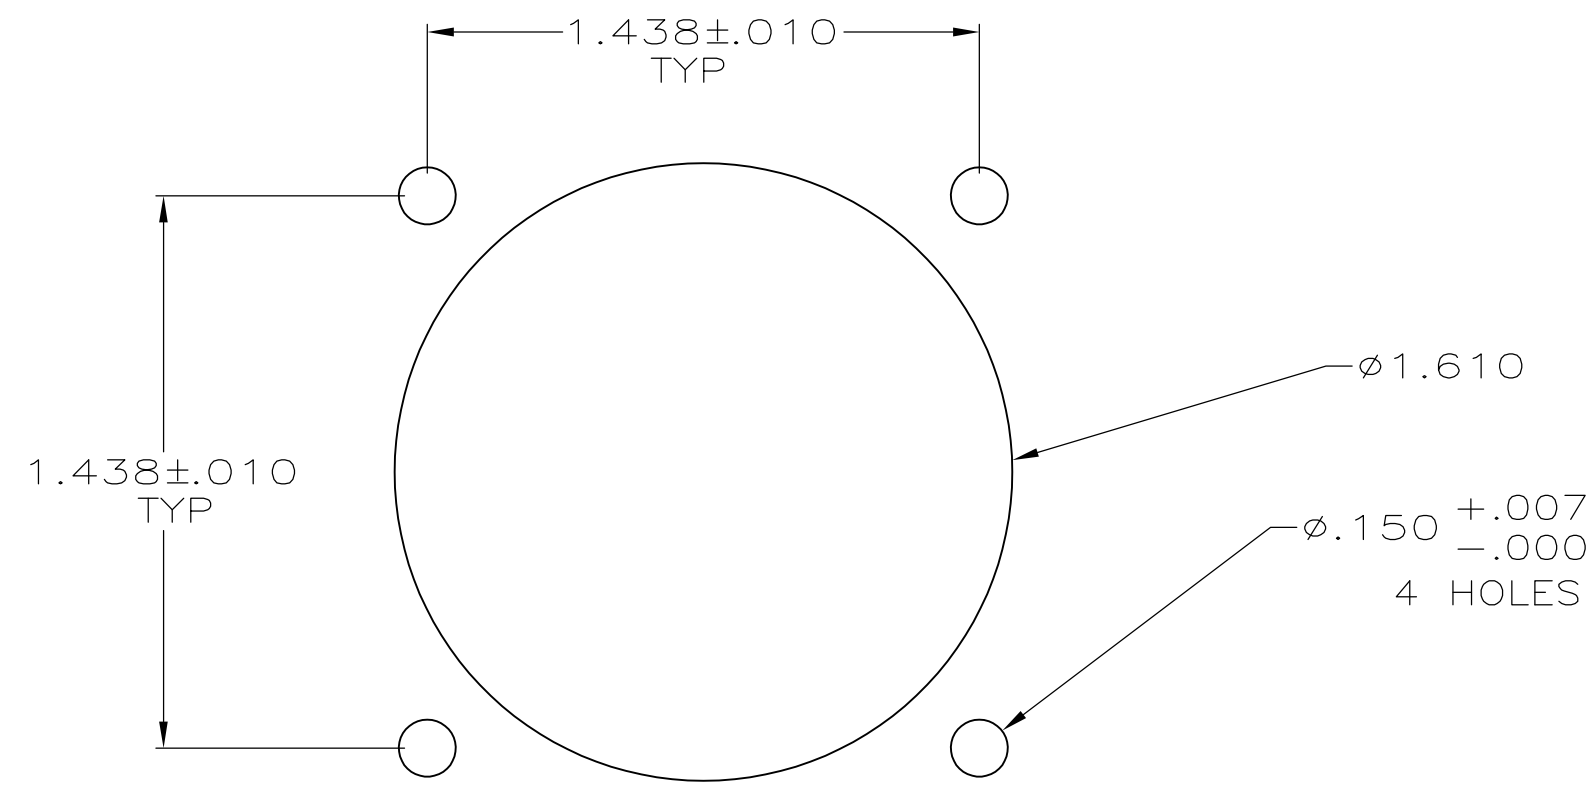

PANEL CUTOUT

D

C

B

A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A.STAUB BG 4/3/91	TE Connectivity	
DIMENSIONS: INCHES		CHK W.G.LENKER 7-24-92		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD K.BEAVER 7-24-92	NAME	
0 PLC ± -		PRODUCT SPEC	RECEPTACLE ASSEMBLY, STD SEX, SERIES 2, 23-63, CPC	
1 PLC ± -		108-10024		
2 PLC ± -		APPLICATION SPEC		
3 PLC ± .005				
4 PLC ± -				
ANGLES ± -				
FINISH				
MATERIAL THERMOPLASTIC, BLACK		WEIGHT	RESTRICTED TO	
		CUSTOMER DRAWING	-	
		SCALE 2:1		
		SHEET 1 of 1		
		REV G		

205843