




注記 NOTES



- 適合ハウジング：51021シリーズ
APPLICABLE HOUSING : 51021 SERIES

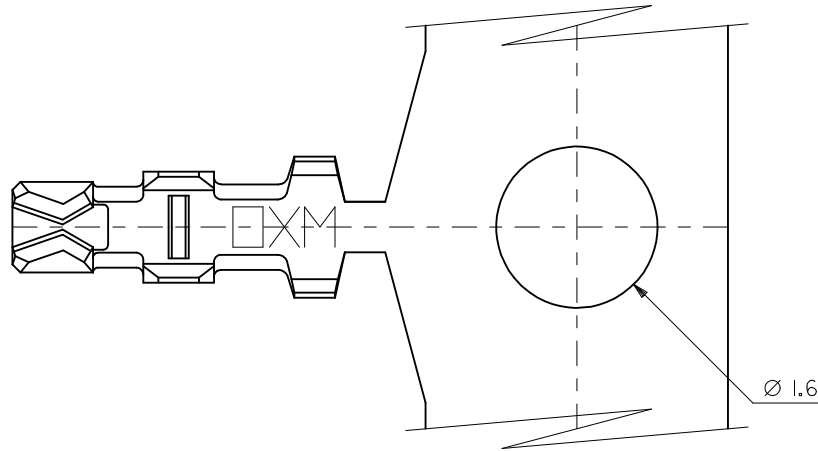

SECT. A-A



SECT. B-B

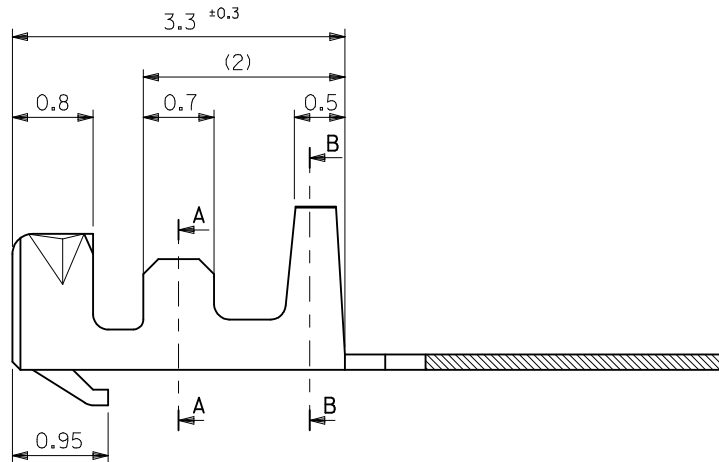

CONTACT AREA: GOLD PLATING (0.384μm MIN.) CRIMP BARREL AREA: TIN PLATING (14μm MIN.) (HEAT TREATED MATTE TIN) UNDERPLATE: NICKEL OVERALL	CHAIN	500798025
PRE-TIN PLATED (HEAT TREATED MATTE TIN) PLATING THICKNESS: 0.94μm MIN.	LOOSE	500798100
	CHAIN	500798000
PLATING	FORM	MATERIAL NO.

MODEL NO. 50079-8***

材料 MATERIAL	リン青銅 (t=0.15) PHOSPHOR BRONZE
仕上げ FINISH	—
適用電線範囲 WIRE RANGE	AWG #26-28
被覆外径 INS. RANGE	φ0.5-1.04

REV	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		
		0.25 UNDER	UNDER	± 0.2
		0.25 OVER	0.5 UNDER	± 0.2
		0.5 OVER	1.0 UNDER	± 0.2
		1.0 OVER	10 UNDER	± 0.2
		10 OVER	30 UNDER	± 0.25
		30 OVER		± 0.3
		ANGULAR	± 3 °	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

DIMENSION STYLE MM ONLY	SCALE 20:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
DRAWN BY HIRAMOT	DATE 92/10/21	TITLE PICOBLADE 1.25 CRIMP REC. TERMINAL	
CHECKED BY SKUNISHI	DATE 98/07/07		
APPROVED BY MFUKUSHI	DATE 98/07/07		
MATERIAL NO.	DOCUMENT NO.	SD-50079-001	SHEET NO. 1 OF 1
SEE CHART			
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			