
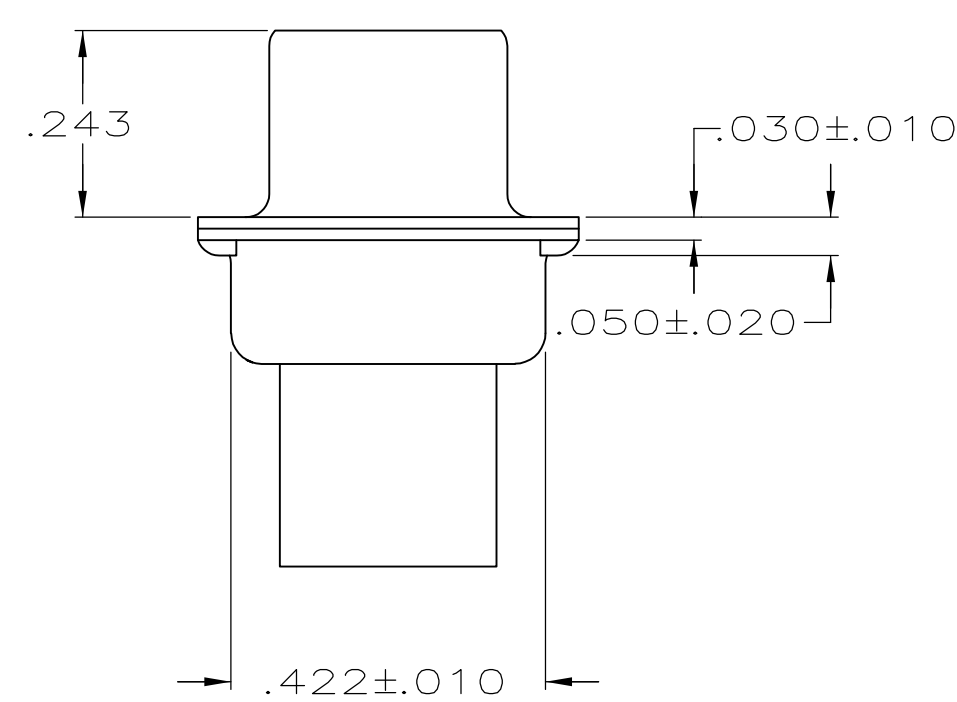
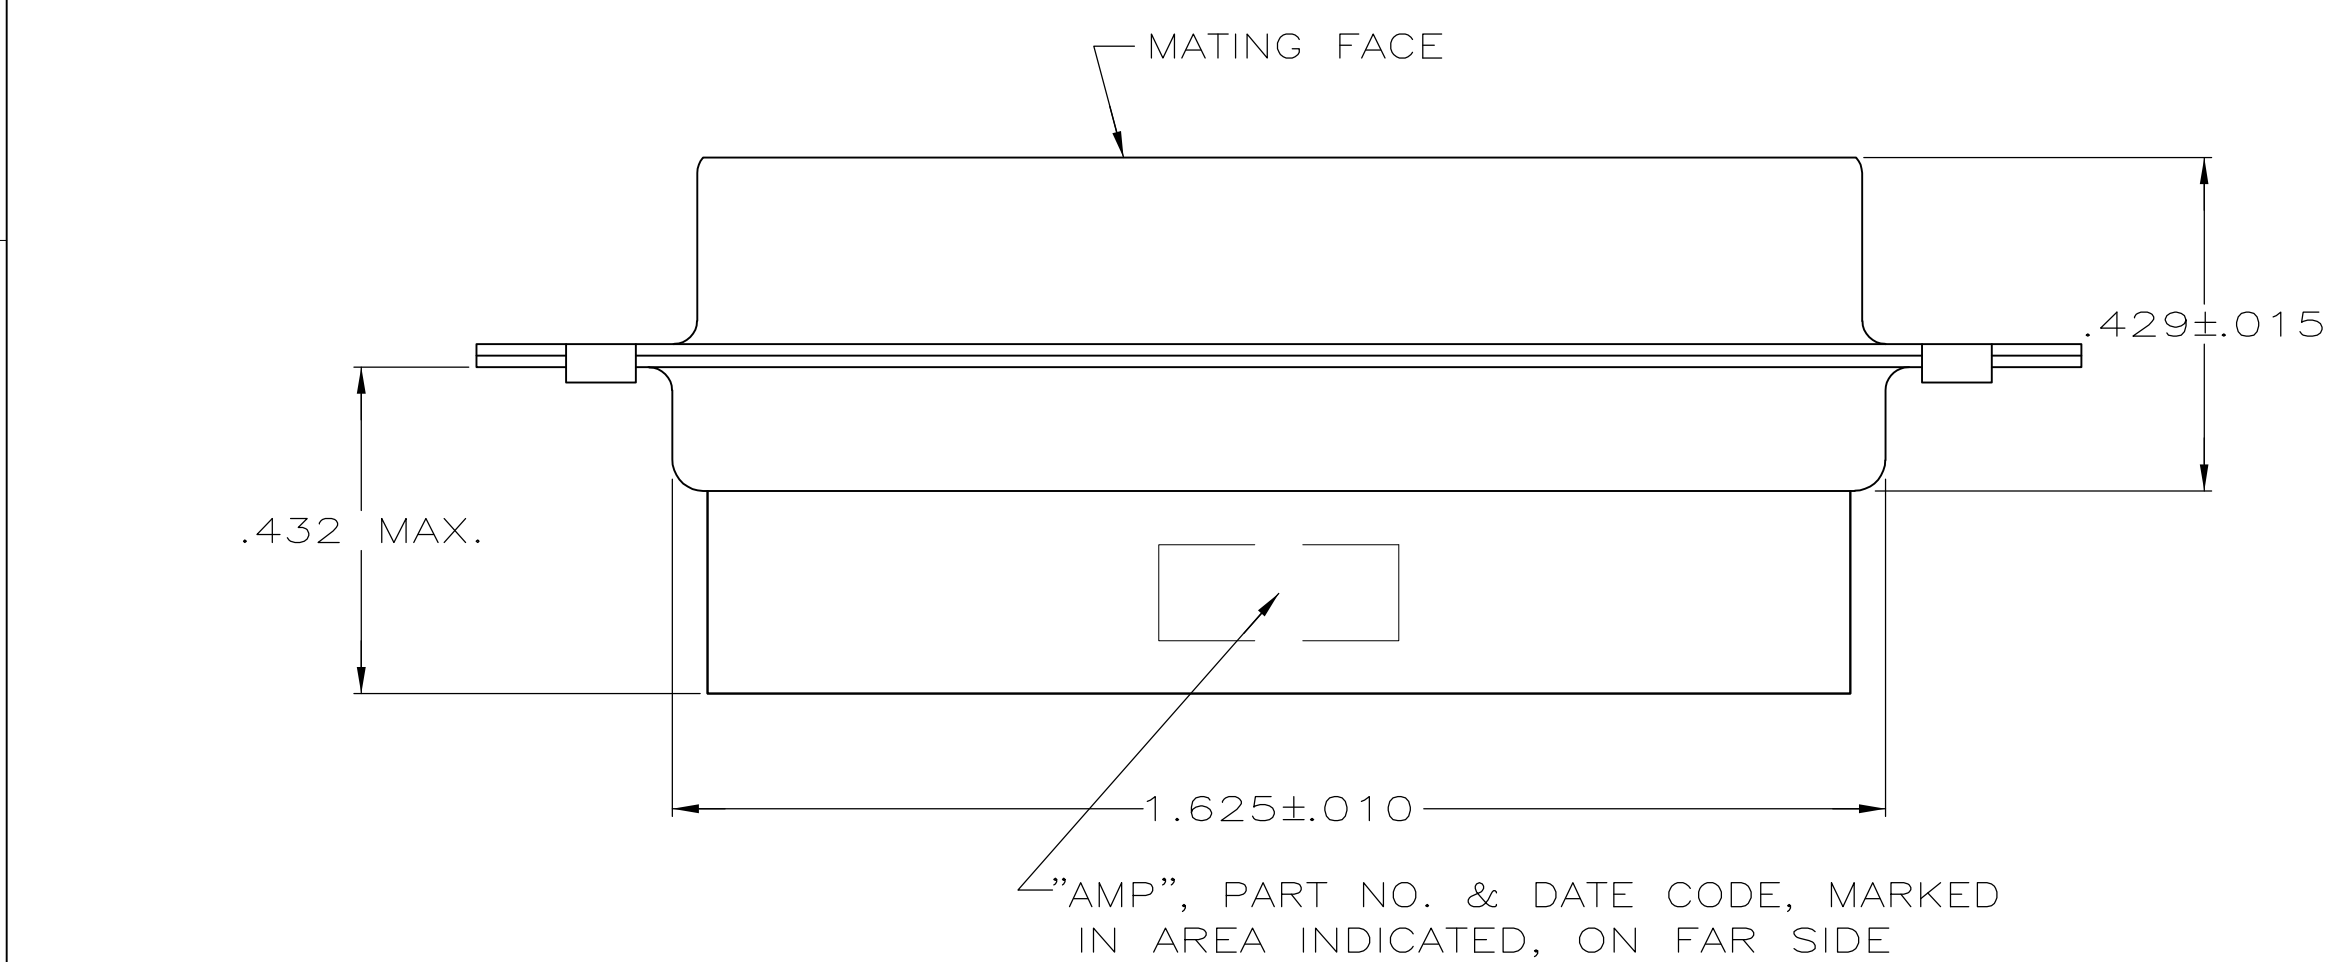
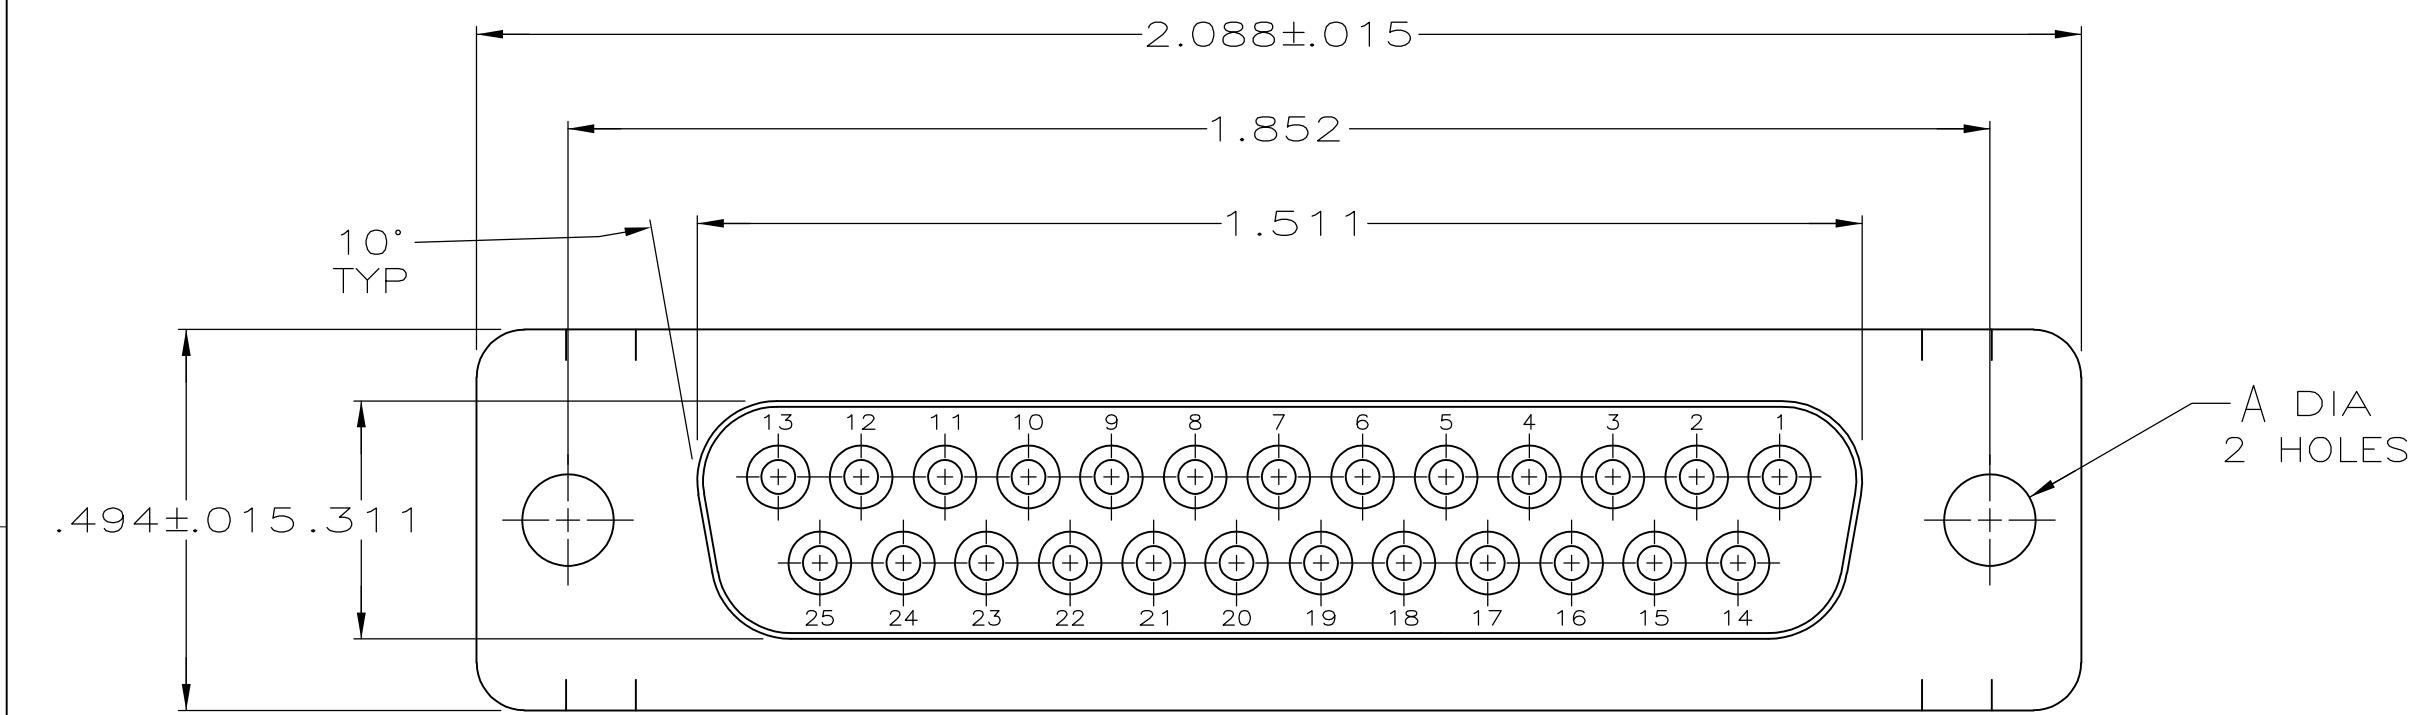


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00						
			E	REVISED PER ECO-14-011808	09AUG2014	AP	SB



- CONNECTOR ACCEPTS SIZE 20 DF SOCKET CONTACTS, RETENTION TINES ARE AN INTEGRAL PART OF INSERT.
- CONNECTOR COMPLIES WITH 108-40005 WHERE APPLICABLE.
- GLASS-FILLED PBT OR GLASS-FILLED NYLON, UL94V-0 RATED. COLOR: BLACK
- STEEL PER ASTM A109.
- TIN OR TIN-LEAD PLATED PER MIL-T-10727.
- TIN PLATED PER MIL-T-10727 OVER COPPER PER MIL-C-14550.

OBSOLETE	SMALL PACK	6	.120	207463-4
OBSOLETE	STANDARD	5	.154	207463-2
	STANDARD	6	.120	207463-1
PACKAGING TYPE		SHELL FINISH	A	PART NO

		PACKAGING TYPE		SHELL FINISH		A		PART NO					
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.WELDON 7-19-85		 TE Connectivity									
		CHK J.GERACE 7-29-85											
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD L.BREKOSKY 7-29-85		NAME							
		0 PLC ± -		PRODUCT SPEC		RECEPTACLE CONNECTOR, SIZE 3, 25 POSITION, AMPLIMITE™ HDP							
		1 PLC ± -		—									
		2 PLC ± -		APPLICATION SPEC									
		3 PLC ± -.005		—									
		4 PLC ± -		—		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
MATERIAL		FINISH		WEIGHT		A2		00779		C-207463		—	
MOLDED PARTS: 		SHELLS: SEE TABLE		CUSTOMER DRAWING		SCALE		4:1		SHEET		1 of 1	
SHELLS: 										REV		E	

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.