

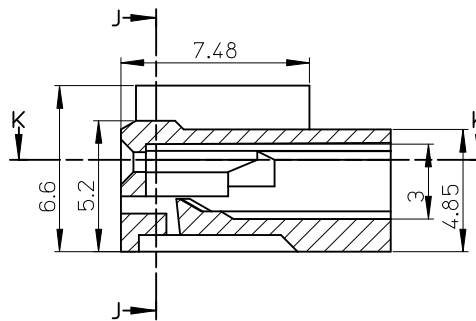


10 9 8 7 6 5 4 3 2 1

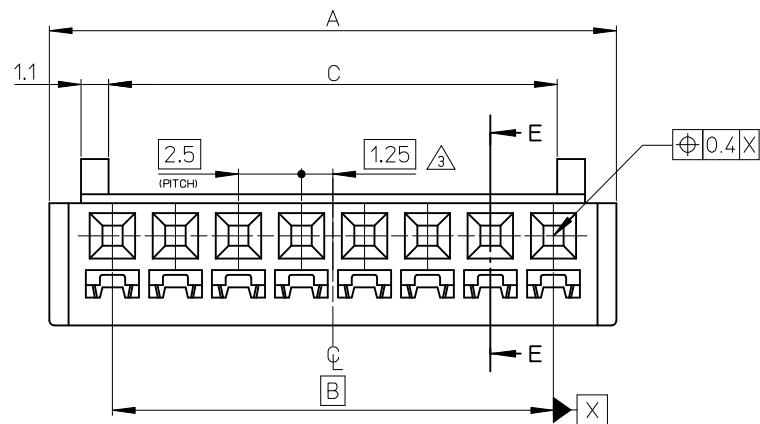


断面 E-E
SECTION E-E


- NOTES: 1. 適合ターミナル : 50802-****
APPLICABLE TERMINAL : 50802-****
2. 嵌合相手 : 5045, 5046, 5240 シリーズ
MATE WITH : 5045, 5046, 5240 SERIES
△ 偶数極の製品に適用
APPLY EVEN CIRCUITS PRODUCTS

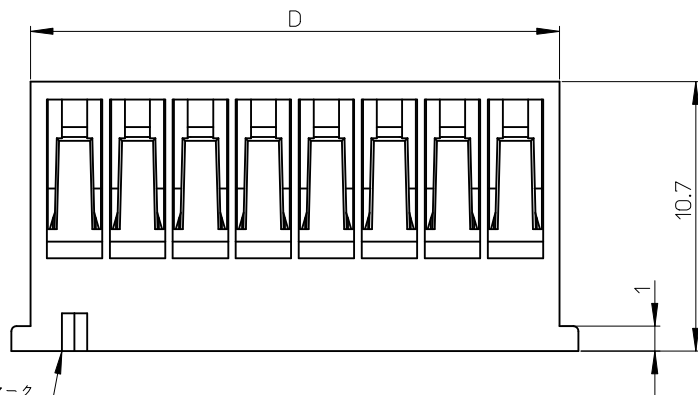


回路番号1マーク
CKT.NO.1MARK



断面 J-J
SECTION J-J

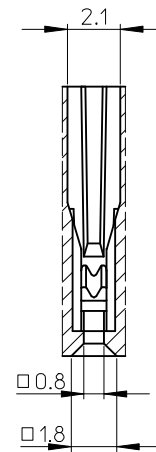

断面 K-K
SECTION K-K

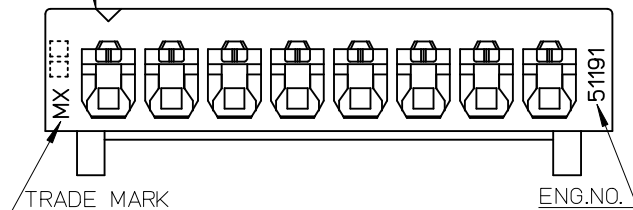

材料 MATERIAL	NYLON66.UL94V-0
仕上げ FINISH	—#—
適用電線範囲 WIRE RANGE	—#—
被覆外径 INS. RANGE	—#—

41	37.8	37.5	42.5	51191-1600	16
38.5	35.3	35	40	51191-1500	15
36	32.8	32.5	37.5	51191-1400	14
33.5	30.3	30	35	51191-1300	13
31	27.8	27.5	32.5	51191-1200	12
28.5	25.3	25	30	51191-1100	11
26	22.8	22.5	27.5	51191-1000	10
23.5	20.3	20	25	51191-0900	9
21	17.8	17.5	22.5	51191-0800	8
18.5	15.3	15	20	51191-0700	7
16	12.8	12.5	17.5	51191-0600	6
13.5	10.3	10	15	51191-0500	5
11	7.8	7.5	12.5	51191-0400	4
8.5	5.3	5	10	51191-0300	3
6	2.8	2.5	7.5	51191-0200	2
D	C	B	A	MATERIAL NO.	CKT.
51191-**-00				MODEL NO.	

REVISED EC NO: J2009-1227 DRWN: YOSHIDAM 2008/12/19 CHKD: THARUYAMA 2008/12/19 APPR: NUKITA 2009/01/16	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± 0.2	S. MATSUZAKI	1998/04/09	TITLE 2.5 WIRE TO BOARD CONN. HOUSING				
		10 OVER 30 UNDER	± 0.25	CHECKED BY	DATE					
		30 OVER	± 0.3	S. KUNISHI	1998/04/10					
		ANGULAR ± --- °		APPROVED BY		DATE	MOLEX MOLEX INCORPORATED			
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		M. FUKUSHIMA		1998/04/10					
C	REV			MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
				SEE TABLE		SD-51191-004		1 OF 1		
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										