


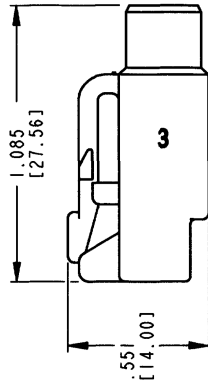



REV A		DTM06-3S		REVISIONS	
SYM	DESCRIPTION	DATE	APPROVED		
NC	NEW RELEASE PER E.O. A14874	7-21-95	RDR		
A	REDRAWN & REVISED PER E.O. P171723-6-01				



6. MATERIAL - HOUSING: PLASTIC; GROMMET: RUBBER.
5. THIS PLUG MATES WITH DTM04-3P-***** RECEPTACLE. (***** = ALL MODIFICATIONS)
4. FOR CONTACT AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS SEE ENVELOPE DRAWING 0425-015-0000.
3. SECONDARY WEDGE LOCK SOLD SEPARATELY: WM-3S.
2. DIMENSION TOLERANCE: ±.025 [.64].
1. DIMENSIONS ARE IN INCHES [mm].

CONTACT SIZE	MIN. INSUL. O.D.	MAX. INSUL. O.D.	WIRE RANGE [mm ²] REF ONLY
20	.053 [1.35]	.120 [3.05]	16-20 AWG [1.0-0.5]

DR	CHK	PE	APPD	SCALE	NONE	WT
J. APSTOL 05MAR2007	J. P. WILSON 3/6/07	D. DAY 3/6/07	R. R. 3-6-07			

SIGNATURE & DATE		CP	WT. CODE
3 SKT. CONT. #20 DTM SERIES		PLUG	
ENVELOPE		The Deutsch Company DEUTSCH I.P.D. 3850 INDUSTRIAL AVE. HEMET, CALIF. 92545	
DTM06-3S		DTM06-3S	
CODE 11139		SHEET	OF 1

NOTES: UNLESS OTHERWISE SPECIFIED