

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.

REVISIONS






P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	14JAN2015	DW	CW

NOTES:


- I. TECHNICAL CHARACTERISTICS:
HOUSING MATERIAL: DIE CAST ZINC ALLOY
SURFACE: POWDER COATED, RAL7037
SEAL MATERIAL: NBR
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:

- I. 技术参数:
下壳材料: 锌合金
表面处理: 粉末涂层, RAL7037
密封材料: NBR
工作温度: -40-+125°C
防护等级: IP65(配合)

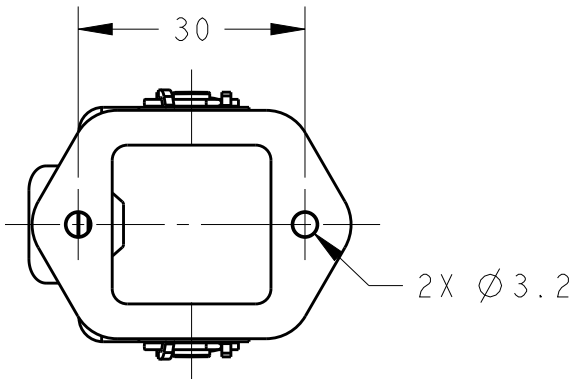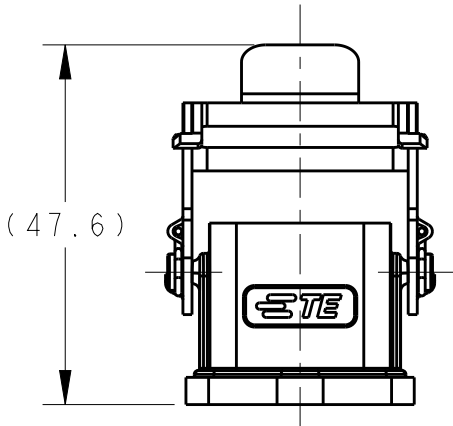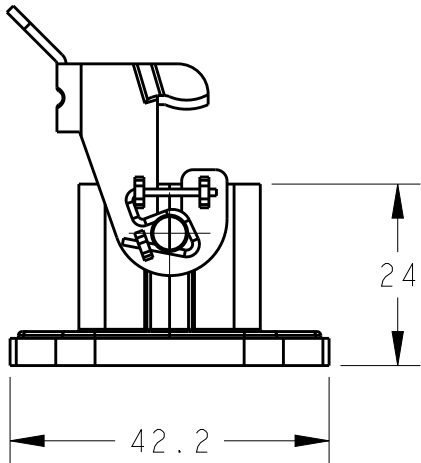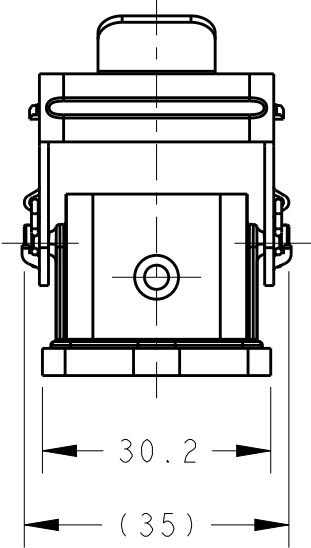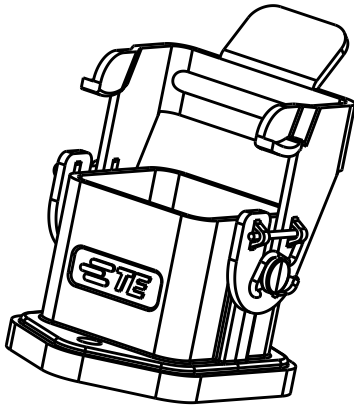


PANEL CUT OUT

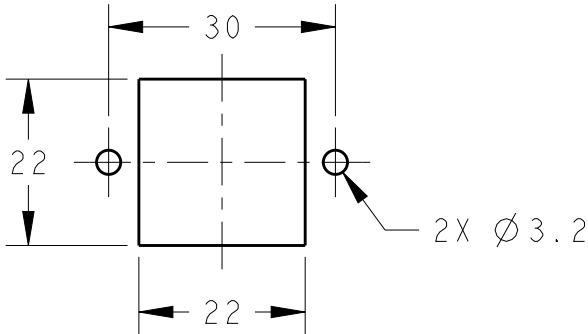

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm



TOLERANCES UNLESS OTHERWISE SPECIFIED:

- 0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±

MATERIAL

-

FINISH

-

DWN 14JAN2015

David Wang

CHK 14JAN2015

Chris Wang

APVD 14JAN2015

Xiang Xu

PRODUCT SPEC

108-137012

APPLICATION SPEC

114-137012

WEIGHT

-

Customer Drawing

H3A-MAG

T1509030000-000

DESCRIPTION

PART NUMBER



TE Connectivity

NAME

H3A-MAG

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779

C-T1509030000000

-

SCALE

1:1

SHEET

1 OF 1

REV

A