


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	11APRL2016	L.Z	X.X
	B	EC-16-011351 NEW REVISE	01JUL2016	L.Z	X.X
	B1	REVISED PER ECR-16-012993	19SEP2016	L.Z	X.X

D

C

B


A

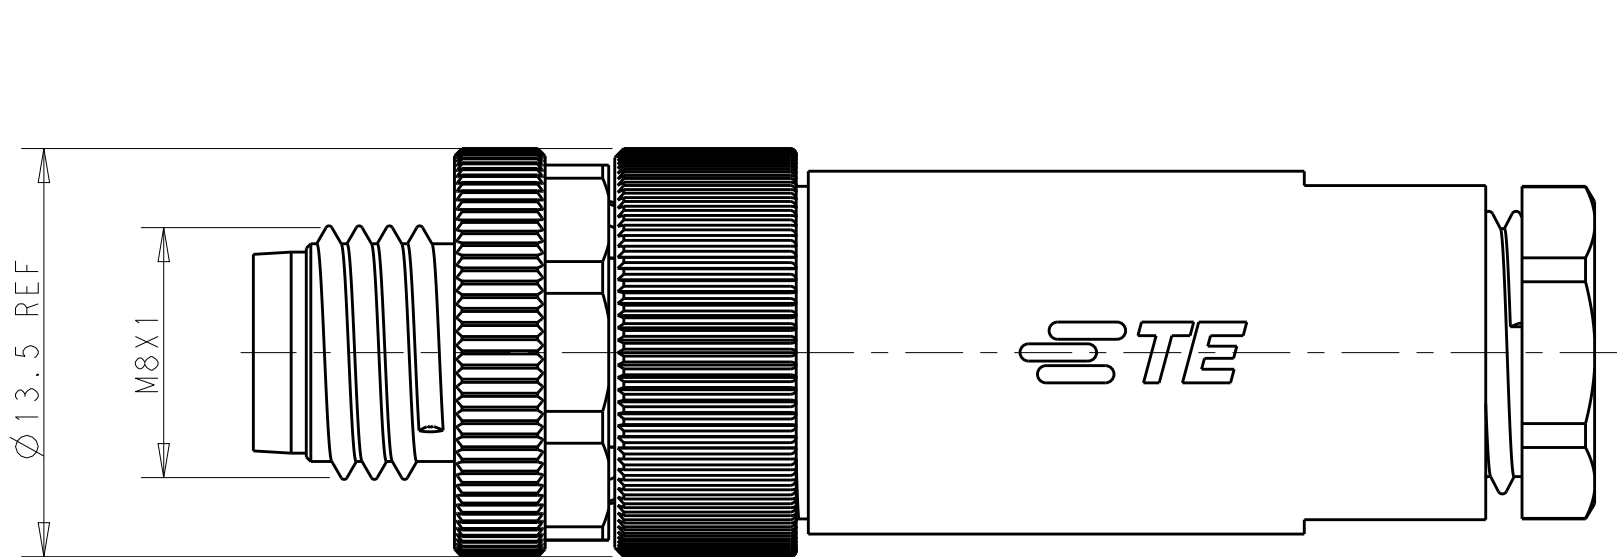


OPERATION TEMPERATURE	-40~85°C	-40~85°C
DEGREE OF PROTECTION	IP67	IP67
INSULATION RESISTANCE	>100MΩ	>100MΩ
RATED IMPULSE VOLTAGE	800V	1500V
MATERICAL GROUP	II	II
OVERVOLTAGE CATEGOYR	II	II
POLLUTION DEGREE	3	3
RATED CURRENT	3A	3A
RATED VOLTAGE	30V	60V
TECHNICAL DATA	T401100804X-000	T401100803X-000

T4011008042-000	RPC-M8-MS-4CON-PG7-M	OBSOLETE
T4011008041-000	RPC-M8-MS-4CON-PG7-MU	
T4011008032-000	RPC-M8-MS-3CON-PG7-M	OBSOLETE
T4011008031-000	RPC-M8-MS-3CON-PG7-MU	
TE PN	TYPE	



-	PBT	PRESS SCREW	6	1	1	1
-	PBT	STRAIGHT PLASTIC HOUSING	5	1	1	1
SILVER 80U"	BRASS	M8 SCTREW ASSY PLUG TERMINAL	4	4	3	-
GOLD 3U"				4	3	
NICKEL 80U"	BRASS	M8 SCREW ASSY OUT SCREW	3	1	1	1
NICKEL 80U"	BRASS	M8,MALE INSERT NUT	2	1	1	1
BLACK	PA	M8,MALE HSG,A CODE,4PIN	1	1	-	-
		M8,MALE HSG,A CODE,3PIN		-	1	1
COMMENT	MATERIAL	DESCRIPTION	ITEM	4	T	T
				4	4	4
				0	0	0
				1	1	1
				0	0	0
				0	0	0
				8	8	8
				0	0	0
				4	4	3
				2	1	2
				1	1	1
				0	0	0
				0	0	0
				0	0	0

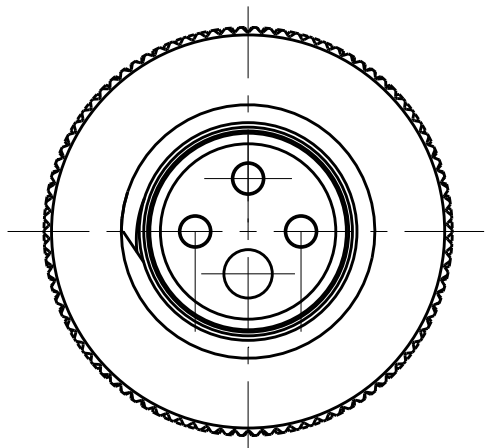

3POS

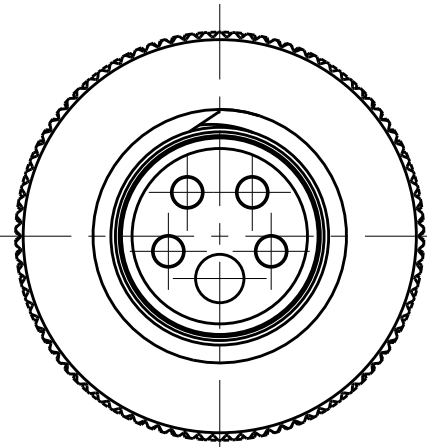


4POS

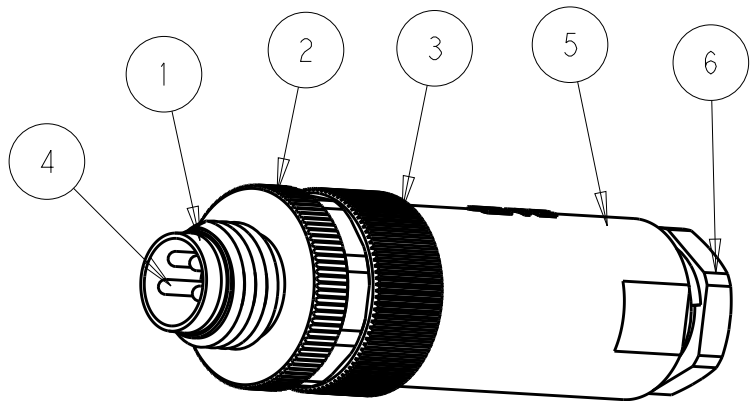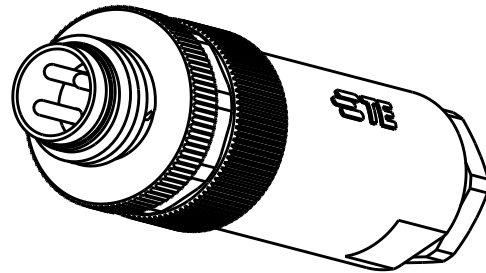

- NOTES;
- 1.PARTS MATERIAL DATA:SEE TABLE
- 2.CONTACT FINISH:
GOLD OVER NICKEL OR SILVER OVER NICKEL
- 3.CABLE WIRES:
26AWG/0.14mm² Max & 24AWG/0.25mm² Max
- 4.ALL DIMENSIONS ARE FOR NOMINAL REFERENCE ONLY UNLESS OTHERWISE STATE
- 5.PACKAGIN: 1 PIECE IN A BAG
- 6.PN INFORMATION FOR ASSEMBLY PARTS
T401100XXXX-000

- CONTACT FINISH:
1:GOLD OVER NICKEL
2:SILVER OVER NICKEL
- NUMBERS OFPINS:
03:3 PINS
04:4 PINS
...
- CABLE OUTLET:
8:PLASTIC/8(CABLE FEED:3.5~4.8mm)
9:METAL(CABLE FEED:3.5~5.0mm)
...

- 注意事项;
1. 零件材料参见附表
2. 表面处理: 镀金或镀银
3. 适用线材: 26AWG/0.14mm² Max & 24AWG/0.25mm² Max
4. 所有尺寸标注为基本参考, 除非其它说明
5. 包装: 每BAG装1PC
6. 料号数字代码参考上表

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN LEAR ZHANG CHK KOBBY ZHAO APVD XU XIANG	12APR2016 12APR2016 12APR2016		 TE Connectivity			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±0.20 2 PLC ±0.20 3 PLC ±0.20 4 PLC ±- ANGLES ±- FINISH		NAME M8 MALE SCREW ASSY STRAIGHT UNSHIELDING CONNECTOR -				
		PRODUCT SPEC 108-106140 APPLICATION SPEC 114-137144-1		SIZE A2	CAGE CODE -	DRAWING NO C-T40110080XX000	RESTRICTED TO -	
MATERIAL - -		WEIGHT -		CUSTOMER DRAWING		SCALE 2:1	SHEET 1 OF 1	REV B1