

Technical drawing of the rear view of the battery pack. It shows a 3x2 grid of cells with various dimensions and a width of 39.2.

564514-1

CODING
Kodierung

POLARIZATION
Polarisierungen

Technical drawing of a 16-pin D-sub connector. The drawing shows the top view of the connector with 16 pins arranged in a 4x4 grid. The pins are numbered 1 through 16. The drawing is labeled with '664514-1' in the top left corner. The text 'CODING' and 'Kodierung' are in the top right corner. The text 'POLARIZATION' and 'Polarisierungen' are in the bottom left corner. The drawing shows the internal structure of the connector, including the pins and the housing.

564514-1

Polarization

Polarisierungen

Technical drawing of a rectangular electronic component, likely a microcontroller or logic device, showing dimensions and a pinout diagram.

Dimensions:

- Overall width: 6 ± 0.2
- Overall height: 4 ± 0.2
- Pin pitch (horizontal): 2 ± 0.2
- Pin pitch (vertical): 3 ± 0.2
- Pin offset from left edge: 6 ± 0.2

Pinout Diagram:

The component has 16 pins arranged in a 4x4 grid. The pins are numbered 1 through 16, starting from the top-left corner and proceeding in a boustrophedon pattern (alternating rows from left to right and right to left).

Pin Functions:

- Pin 1: $2X4 \pm 0.2 = (8)$
- Pin 2: $2X4 \pm 0.2 = (8)$
- Pin 3: $2X4 \pm 0.2 = (8)$
- Pin 4: $2X4 \pm 0.2 = (8)$
- Pin 5: $2X4 \pm 0.2 = (8)$
- Pin 6: $2X4 \pm 0.2 = (8)$
- Pin 7: $2X4 \pm 0.2 = (8)$
- Pin 8: $2X4 \pm 0.2 = (8)$
- Pin 9: $2X4 \pm 0.2 = (8)$
- Pin 10: $2X4 \pm 0.2 = (8)$
- Pin 11: $2X4 \pm 0.2 = (8)$
- Pin 12: $2X4 \pm 0.2 = (8)$
- Pin 13: $2X4 \pm 0.2 = (8)$
- Pin 14: $2X4 \pm 0.2 = (8)$
- Pin 15: $2X4 \pm 0.2 = (8)$
- Pin 16: $2X4 \pm 0.2 = (8)$

SECTION A-A
Schnitt

1 2 3 4 5

0-1670898

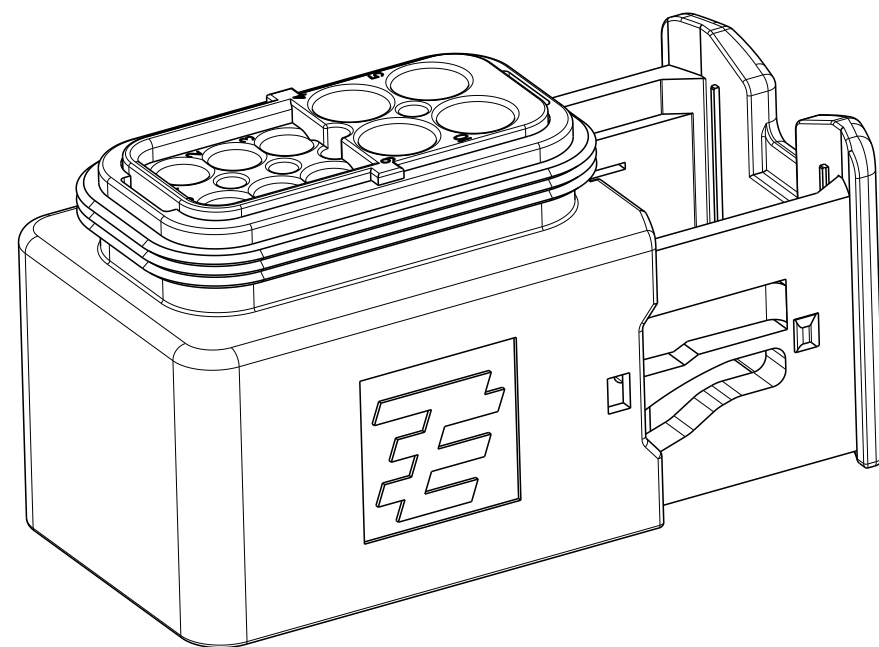
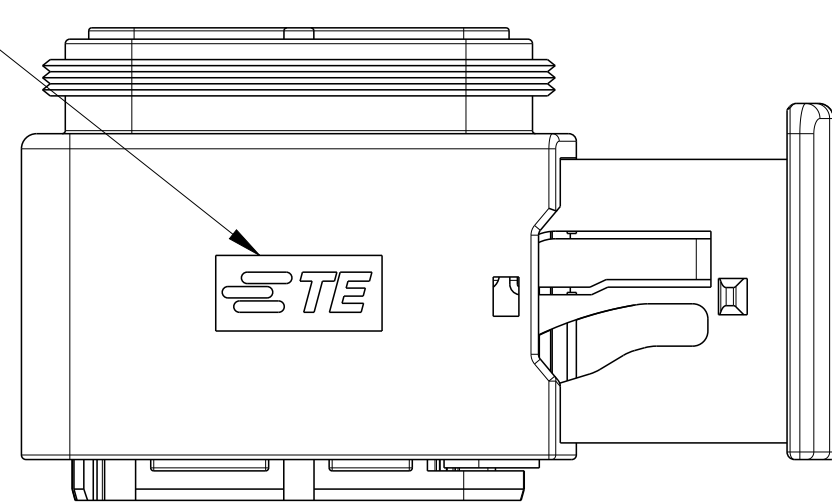
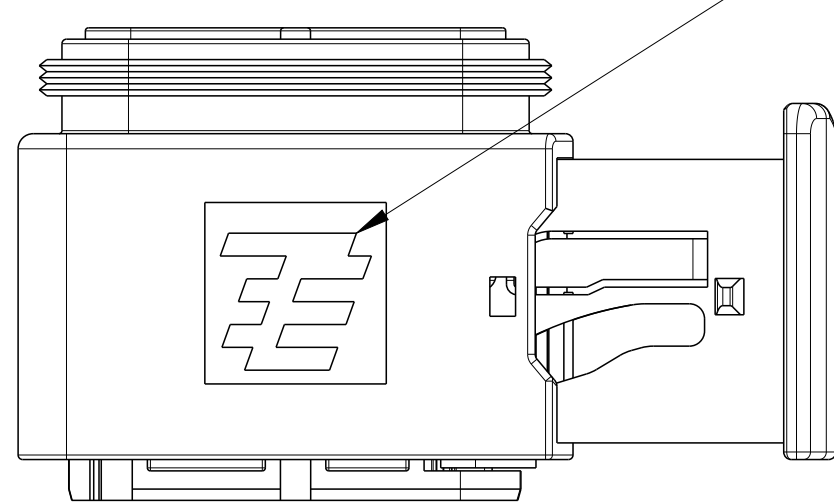
1-1564514-1 J

XXX/XX

X.X

PBT-GF30

(0.9) 8

[illegible]

11 MALFUNCTION CAUSED BY LACQUER IS NOT
COVERED BY TE WARRANTY.
Funktionsbeeinträchtigung durch Lackieren liegt nicht im
Einfluss und Gewährleistungsumfang von TE.

Pfaffmann 08SEP2008 Eltrop 08SEP2008		 TE Connectivity	
berwein 08FEB2009 SPEC TPEZ: 08-94020 CATION SPEC LEITUNGSSPEZ: 14-18756 IT 21.1 g		NAME 10POS. AMP MCP 2.8/1.5K, REC HSG. ASSY 10pos. AMP MCP 2.8/1.5k, Buchsengehäuse HDSCS - GROUP D SIZE A1 CAGE CODE 000792 DRAWING NO. 15454514 LEITUNGSSPEZ. 14-18756 IT 21.1 g	
OTHER DRAWING		SCALE 2:1 SHEET 1 1 OF 1 REV J4	