
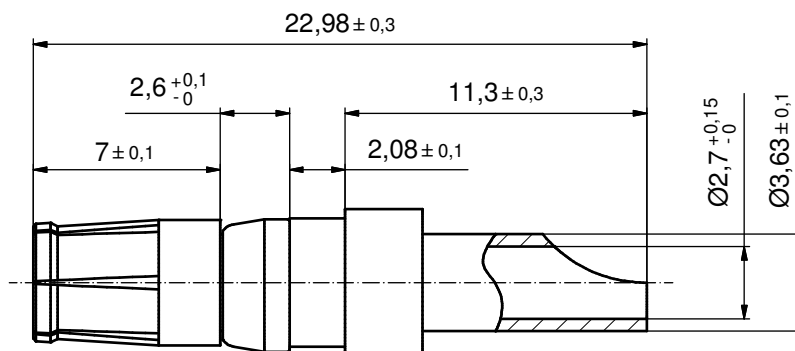


STRIPPING DIMENSION

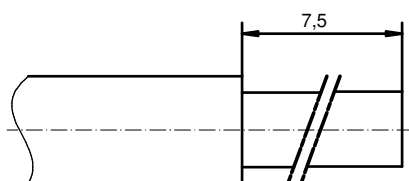

Directive 2002/95/EC RoHS compliant

plating	part no.
GOLD FLASH over NICKEL	132A10029X
30µin HARD GOLD over min. 50µin NICKEL	132C10029X
50µin HARD GOLD over min. 50µin NICKEL	132J10029X

3	1	RETAINING RING	COPPER ALLOY	NICKEL PLATED	
2	1	REAR SIDE	COPPER ALLOY	GOLD FLASH over NICKEL	
1	1	FRONT SIDE	COPPER ALLOY	SEE TABLE	
pos	qty	description	material	plating	
partlist					
THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH	DO NOT ALTER CAD DRAWING BY HAND	tolerance		scale: 5:1	
		ISO 2768-m		material: see partlist	
				title: HIGH POWER CONTACT FEMALE SOLDER CUP 20A D-SUB COMBINATION	
		dim. in mm			
		drawn	23.03.98 Barcinski		
		appd.	23.03.98 Mickenbecker		
		norm			
			d-old	dwg no: 13K11E4A	DIN-A3 sh: 1
		1 x b	Ä4820 02.07.2013 K.H.		
		a	Original		
rev.	description	date	name	part no: see table	

CONEC®