
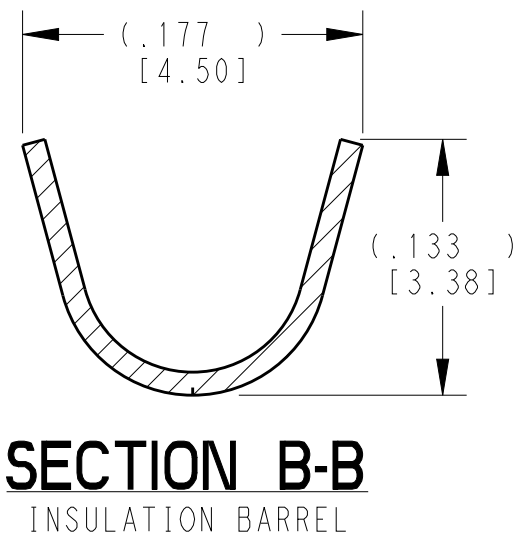
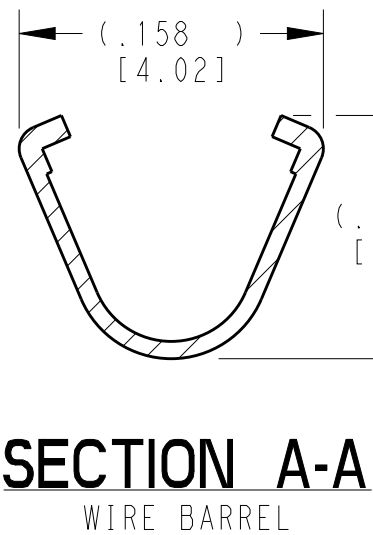
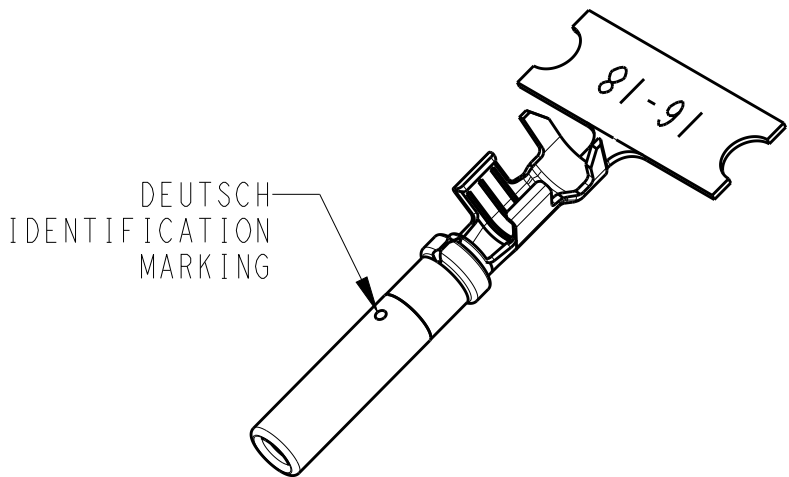


2

1

| LOC | DIST | REVISIONS |     |                           |           |     |      |
|-----|------|-----------|-----|---------------------------|-----------|-----|------|
|     |      | P         | LTR | DESCRIPTION               | DATE      | DWN | APVD |
|     |      |           | F   | REVISED PER E.O. PI6998   | 08DEC2000 | SP  | RDR  |
|     |      |           | G   | REVISED PER E.O. PI9555   | 11JUL2007 | JA  | RDR  |
|     |      |           | H   | REVISED PER E.O. P20396   | 25JUN2010 | JA  | RDR  |
|     |      |           | J   | REVISED PER ECO-15-007761 | 28MAY2015 | RL  | DM   |

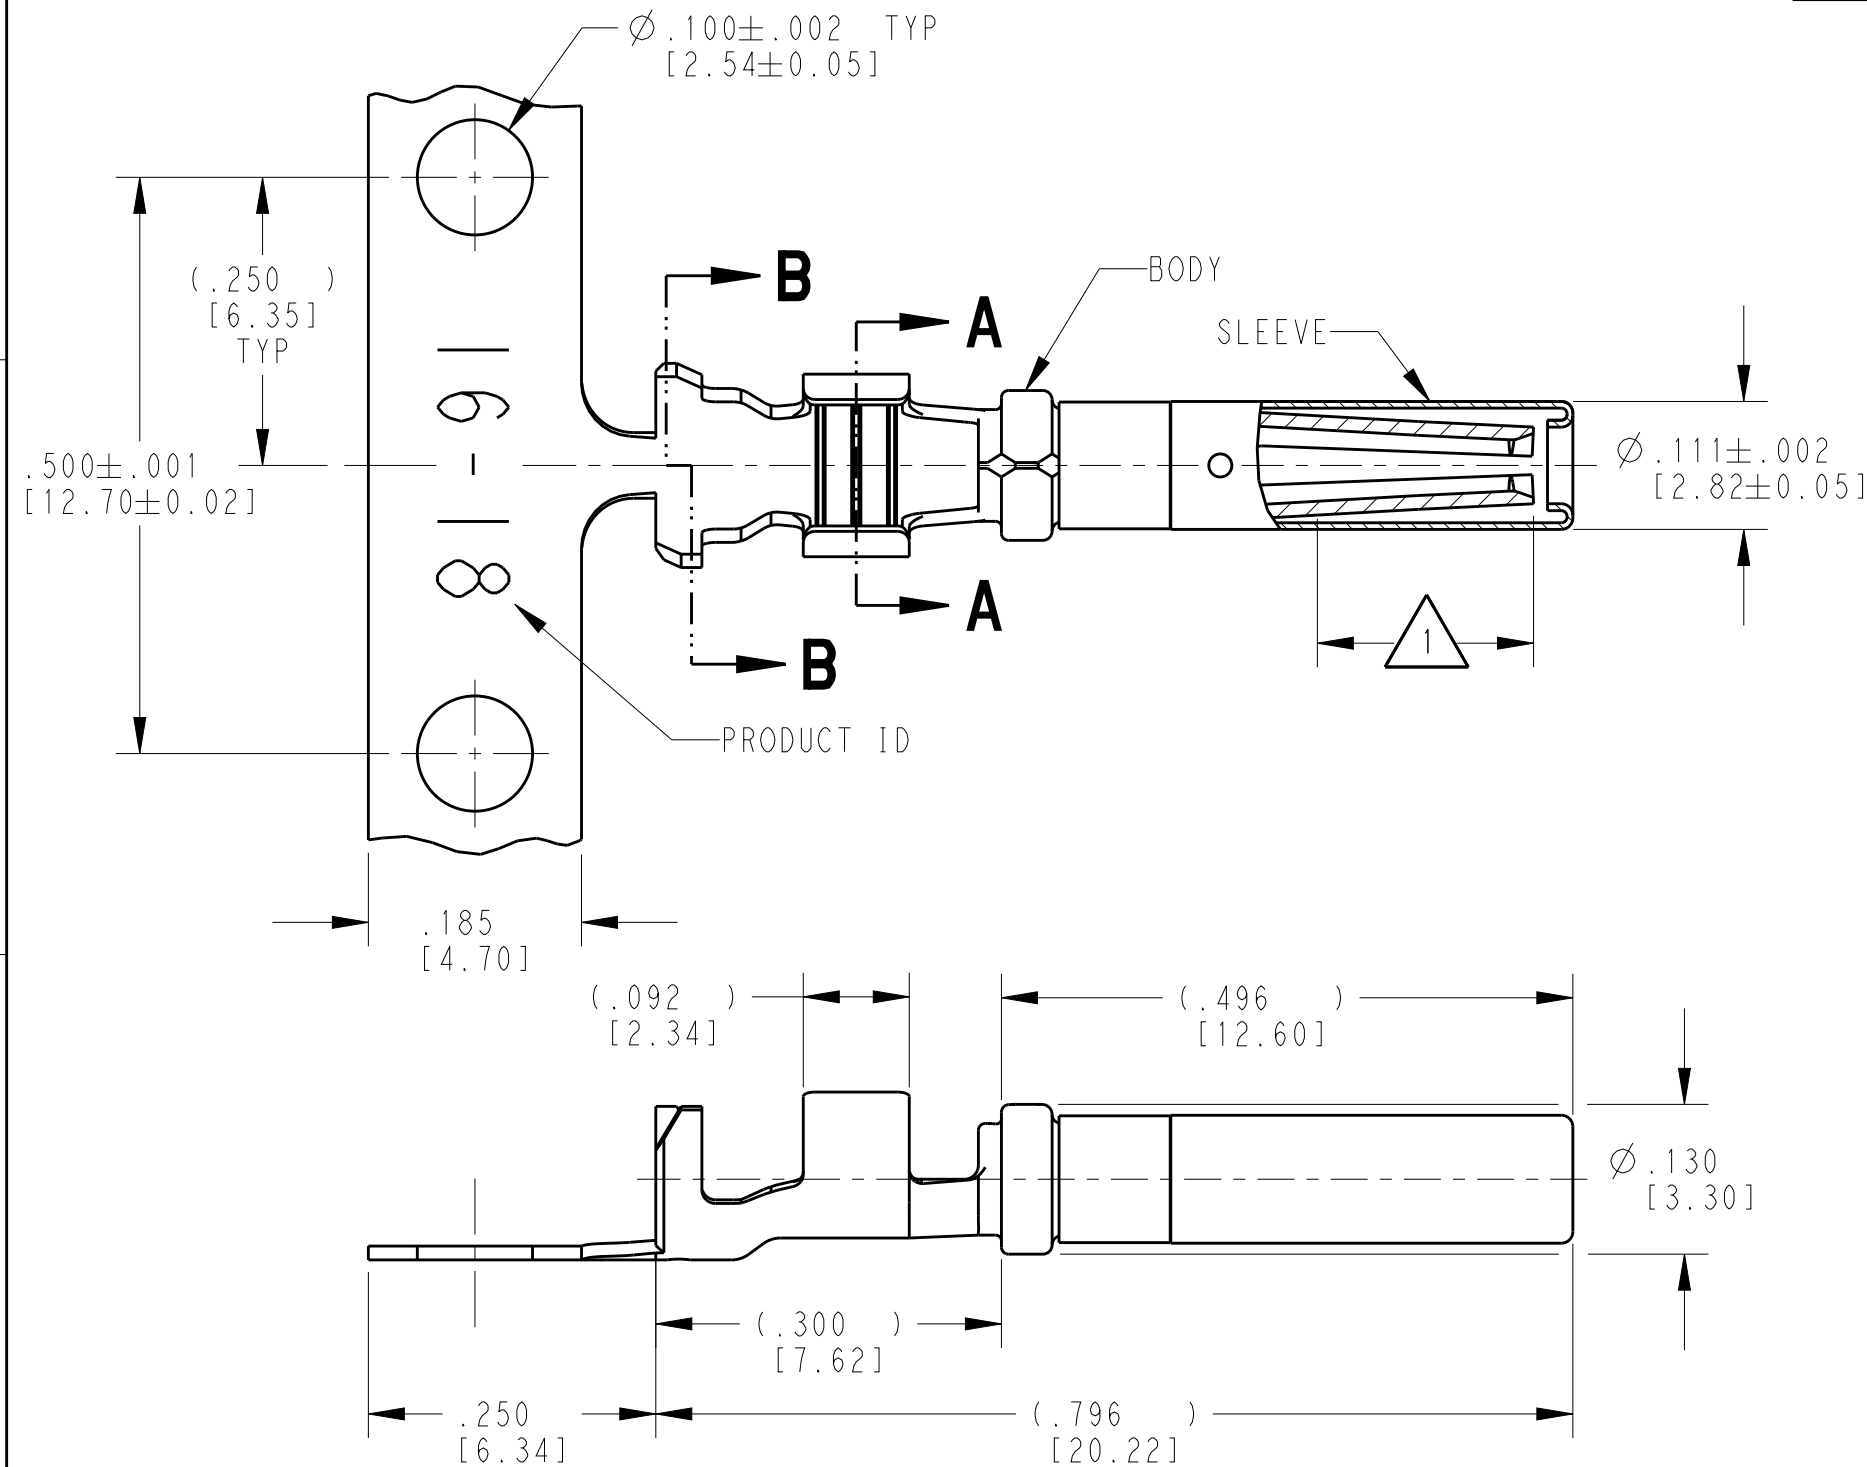

- 3 MATERIAL:  
BODY: .012 [0.30] THICK COPPER ALLOY  
SLEEVE: STAINLESS STEEL
2. WIRE RANGE: 18 AWG TO 14 AWG [0.75-2.0 mm<sup>2</sup>]  
INSULATION RANGE:  $\varnothing .075$ -.140 [ $\varnothing$ 1.91-3.56]
- 1 APPLIES ONLY TO SELECTIVE GOLD 1062-16-0144.  
INDICATED DIMENSION SHOWS GOLD PLATED AREA.

NOTES: UNLESS OTHERWISE SPECIFIED

|                                                                                                     |  |                                |           |                                                           |                    |                              |
|-----------------------------------------------------------------------------------------------------|--|--------------------------------|-----------|-----------------------------------------------------------|--------------------|------------------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT.                                                              |  | DWN<br>M. BLUM                 | 03NOV1999 | TE Connectivity                                           |                    |                              |
| DIMENSIONS:<br>INCHES[mm]                                                                           |  | CHK<br>A. ROLINSKI             | 08DEC2000 |                                                           |                    |                              |
| TOLERANCES UNLESS<br>OTHERWISE SPECIFIED:                                                           |  | APVD<br>R. REED                | 08DEC2000 | NAME<br>SOCKET, STAMPED AND FORMED<br>SIZE 16<br>14-18AWG |                    |                              |
| 0 PLC $\pm$<br>1 PLC $\pm$<br>2 PLC $\pm$<br>3 PLC $\pm .025$ [0.64]<br>4 PLC $\pm$<br>ANGLES $\pm$ |  | PRODUCT SPEC<br>0425-015-0000  |           |                                                           |                    |                              |
| MATERIAL<br>3                                                                                       |  | APPLICATION SPEC<br>114-151000 |           | SIZE<br>A3                                                | CAGE CODE<br>4AFU8 | DRAWING NO<br>C-1062-16-01XX |
| FINISH<br>SEE TABLE                                                                                 |  | WEIGHT<br>0.43 g               |           | RESTRICTED TO<br>-                                        | SCALE<br>6:1       | SHEET<br>1 OF 1              |
|                                                                                                     |  | Customer Drawing               |           | REV<br>J                                                  |                    |                              |