


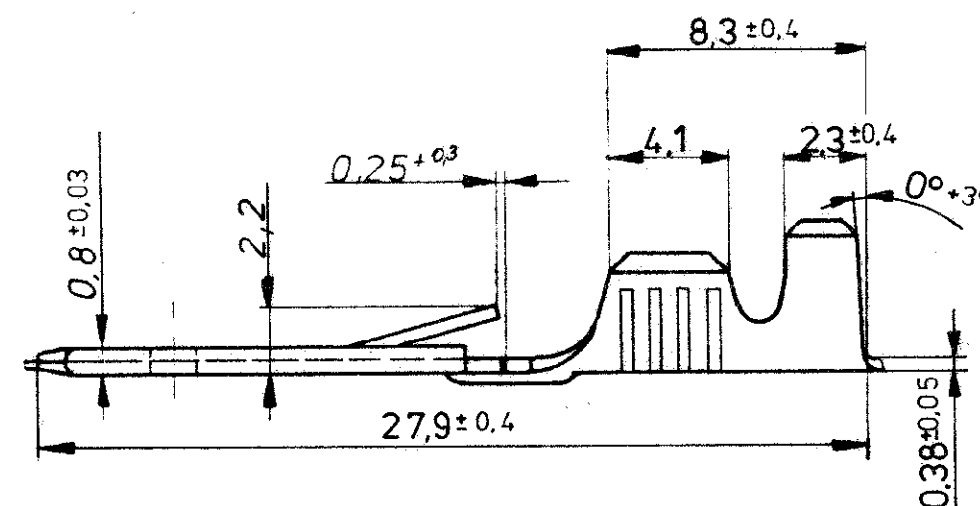


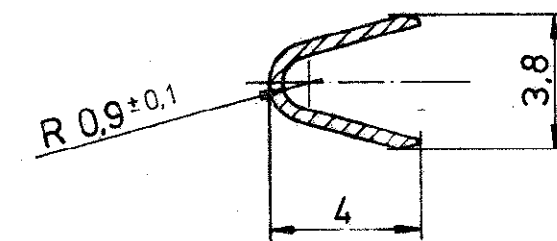

Schnitt A - A

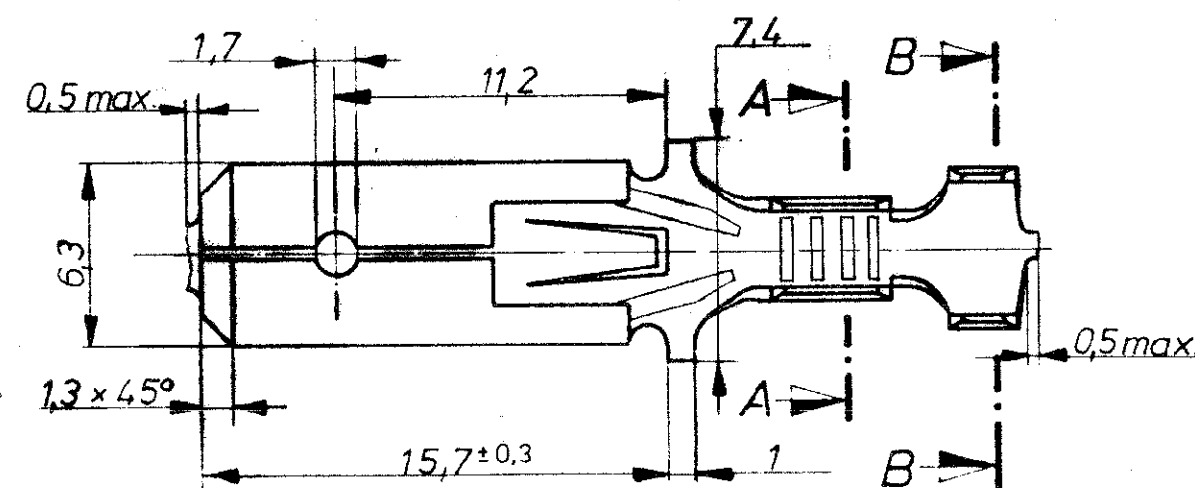

Schnitt B - B

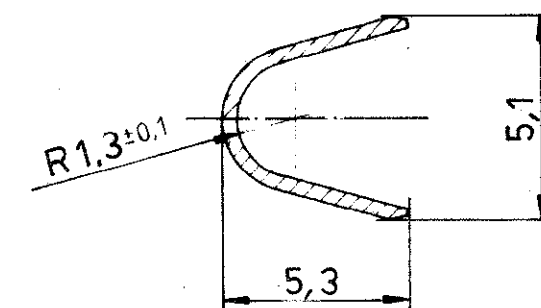

Angeschlagener Leiter FLR - Leitung  
 Leiter F-Crimp  
 Isolation Überlappungs crimp

Drahtgrößenbereich: >1,0 - 2,5 mm<sup>2</sup>  
 Isolations  $\phi$ : 2,1 - 2,9 mm

| Leitungsquerschnitt in mm <sup>2</sup><br>CROSS-SECTION IN mm <sup>2</sup> |                |      |      |      |      |      |      |      |      |      |
|----------------------------------------------------------------------------|----------------|------|------|------|------|------|------|------|------|------|
| SINGLE<br>CONNECTION                                                       | Einzelanschlag | 0.50 | 0.75 | 1.00 | 1.50 | 2.00 | 2.50 | 3.00 | 4.00 | 5.00 |
|                                                                            |                |      |      |      |      |      |      |      |      |      |
| 0.50                                                                       |                |      |      | x    | x    |      |      |      |      |      |
| 0.75                                                                       |                |      |      | x    | x    |      |      |      |      |      |
| 1.00                                                                       |                | x    |      | x    | x    |      |      |      |      |      |
| 1.50                                                                       | x              | x    |      | x    |      |      |      |      |      |      |
| 2.00                                                                       |                |      |      |      |      |      |      |      |      |      |
| 2.50                                                                       | x              |      |      |      |      |      |      |      |      |      |

|  |  |                                |                    |             |             |
|--|--|--------------------------------|--------------------|-------------|-------------|
|  |  | 928 963-8                      | 928 962-8          | CuSn 4      | versilbert  |
|  |  | 928 963-7                      | 928 962-7          | CuZn 30     | vorverzinnt |
|  |  | 928 963-6                      | 928 962-6          | CuSn 4      | vorverzinnt |
|  |  | 928 963-5                      | 928 962-5          | CuSn 4      | blank       |
|  |  | 928 963-4                      | 928 962-4          | Cu Sn 4     | verzinnt    |
|  |  | 928 963-3                      | 928 962-3          | Cu Sn 4 *   | blank       |
|  |  | 928 963-2                      | 928 962-2          | Cu Zn 30    | verzinnt    |
|  |  | 928 963-1                      | 928 962-1          | Cu Zn 30    | blank       |
|  |  | Bestell-Nr.<br>Einzelausführg. | Bestell-Nr.        |             |             |
|  |  |                                | 9.3.87<br>MAYER H. | 10.3.87 HMK |             |

TE Connectivity

6,3 FASTIN-FASTON  
FLACHSTECKER

**K**

± 0,3      A3      928 962

1 von 1      A2