


## VINYL-INSULATED

MALE BULLETS

PVC绝缘子弹形公插

Brass Thickness(铜板厚度):t

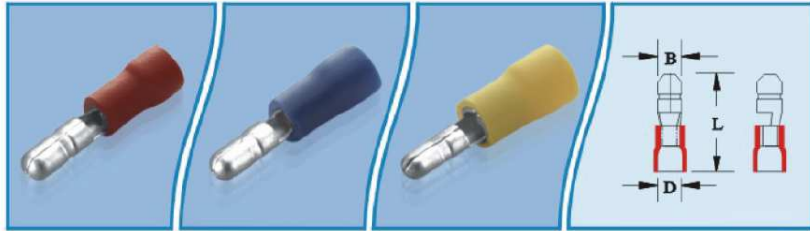

ITEM NO 品名	DIMENSIONS 尺寸 inch(mm)				STANDARD PACKING 包装方式 (PIECE)		WIRE RANGE 电线范围 A.W.G. mm <sup>2</sup>
	D	B	L	t	BOX 盒子	CARTON 纸箱	
VM1.25-156	0.142(3.60)	0.157(4.00)	0.866(22.00)	0.016(0.40)	3,000	18,000	22-16 A.W.G. 0.5-1.5 mm <sup>2</sup>
VM2-156	0.173(4.40)	0.157(4.00)	0.846(21.50)		3,000	18,000	16-14 A.W.G. 1.5-2.5 mm <sup>2</sup>
VM2-195		0.197(5.00)	0.866(22.00)		2,000	12,000	
VM5.5-156	0.213(5.40)	0.157(4.00)	0.984(25.00)		1,500	9,000	12-10 A.W.G. 4-6 mm <sup>2</sup>
VM5.5-195		0.197(5.00)			1,000	6,000	



## VINYL-INSULATED

DOUBLE CRIMP

MALE BULLETS

PVC绝缘公插端子加铜套

Brass Thickness(铜板厚度):t



ITEM NO 品名	DIMENSIONS 尺寸 inch(mm)				STANDARD PACKING 包装方式 (PIECE)		WIRE RANGE 电线范围 A.W.G. mm <sup>2</sup>
	D	B	L	t	BOX 盒子	CARTON 纸箱	
VM1.25-156C	0.169(4.30)	0.157(4.00)	0.846(21.50)	0.016(0.40)	2,000	12,000	22-16 A.W.G. 0.5-1.5 mm <sup>2</sup>
VM2-156C	0.193(4.90)	0.157(4.00)	0.866(22.00)		2,000	12,000	16-14 A.W.G. 1.5-2.5 mm <sup>2</sup>
VM2-195C		0.197(5.00)	0.886(22.50)		2,000	12,000	
VM5.5-156C	0.256(6.50)	0.157(4.00)	1.024(26.00)		1,000	6,000	12-10 A.W.G. 4-6 mm <sup>2</sup>
VM5.5-195C		0.197(5.00)			1,000	6,000	



## VINYL-INSULATED

DOUBLE CRIMP

MALE BULLETS

PVC绝缘公插端子加铜套

FUNNEL ENTRY

Brass Thickness(铜板厚度):t



ITEM NO 品名	DIMENSIONS 尺寸 inch(mm)				STANDARD PACKING 包装方式 (PIECE)		WIRE RANGE 电线范围 A.W.G. mm <sup>2</sup>
	D	B	L	t	BOX 盒子	CARTON 纸箱	
VM1.25-156D	0.169(4.30)	0.157(4.00)	0.886(22.50)	0.016(0.40)	2,000	12,000	22-16 A.W.G. 0.5-1.5 mm <sup>2</sup>
VM2-156D	0.193(4.90)	0.157(4.00)			2,000	12,000	16-14 A.W.G. 1.5-2.5 mm <sup>2</sup>
VM2-195D		0.197(5.00)	2,000		12,000		
VM5.5-156D	0.256(6.50)	0.157(4.00)	1.024(26.00)		1,000	6,000	12-10 A.W.G. 4-6 mm <sup>2</sup>
VM5.5-195D		0.197(5.00)			1,000	6,000	



## NYLON-INSULATED

MALE BULLETS

尼龙绝缘子弹形公插

FUNNEL ENTRY

Brass Thickness(铜板厚度):t



ITEM NO 品名	DIMENSIONS 尺寸 inch(mm)				STANDARD PACKING 包装方式 (PIECE)		WIRE RANGE 电线范围 A.W.G. mm <sup>2</sup>
	D	B	L	t	BOX 盒子	CARTON 纸箱	
AEM1.25-156	0.161(4.10)	0.157(4.00)	0.866(22.00)	0.016(0.40)	3,000	18,000	22-16 A.W.G. 0.5-1.5 mm <sup>2</sup>
AEM2-156	0.177(4.50)	0.157(4.00)	0.886(22.50)		3,000	18,000	16-14 A.W.G. 1.5-2.5 mm <sup>2</sup>
AEM2-195		0.197(5.00)			2,000	12,000	
AEM5.5-156	0.260(6.60)	0.157(4.00)	1.012(25.70)		1,500	9,000	12-10 A.W.G. 4-6 mm <sup>2</sup>
AEM5.5-195		0.197(5.00)			1,000	6,000	

KONEKTORY BRNO s.r.o.

Musilova 1, Brno 61400

tel. 541 212 577

www.konektor.cz

## NYLON-INSULATED

DOUBLE CRIMP

MALE BULLETS

尼龙绝缘子弹形公插

加铜套

FUNNEL ENTRY

Brass Thickness(铜板厚度):t



ITEM NO 品名	DIMENSIONS 尺寸 inch(mm)				STANDARD PACKING 包装方式 (PIECE)		WIRE RANGE 电线范围 A.W.G. mm <sup>2</sup>
	D	B	L	t	BOX 盒子	CARTON 纸箱	
AEM1.25-156D-TR	0.161(4.10)	0.157(4.00)	0.866(22.00)	0.016(0.40)	2,000	12,000	22-16 A.W.G. 0.5-1.5 mm <sup>2</sup>
AEM2-156D-TR	0.197(5.00)	0.157(4.00)	0.886(22.50)		2,000	12,000	16-14 A.W.G. 1.5-2.5 mm <sup>2</sup>
AEM2-195D-TR		0.197(5.00)			2,000	12,000	
AEM5.5-156D-TR	0.260(6.60)	0.157(4.00)	1.024(26.00)		1,000	6,000	12-10 A.W.G. 4-6 mm <sup>2</sup>
AEM5.5-195D-TR		0.197(5.00)			1,000	6,000	



## NYLON-FULLY INSULATED

MALE BULLETS

尼龙全绝缘子弹形公插

FUNNEL ENTRY

Brass Thickness(铜板厚度):t



ITEM NO 品名	DIMENSIONS 尺寸 inch(mm)				STANDARD PACKING 包装方式 (PIECE)		WIRE RANGE 电线范围 A.W.G. mm <sup>2</sup>
	D	B	L	t	BOX 盒子	CARTON 纸箱	
AEM1.25-156A	0.169(4.30)	0.157(4.00)	0.984(25.00)	0.016(0.40)	1,000	6,000	22-16 A.W.G. 0.5-1.5 mm <sup>2</sup>
AEM2-156A	0.197(5.00)	0.157(4.00)			1,000	6,000	16-14 A.W.G. 1.5-2.5 mm <sup>2</sup>
AEM2-195A		0.197(5.00)			1,000	6,000	
AEM5.5-156A	0.260(6.60)	0.157(4.00)	1.083(27.50)		500	3,000	12-10 A.W.G. 4-6 mm <sup>2</sup>
AEM5.5-195A		0.197(5.00)			500	3,000	

KONEKTORY BRNO s.r.o.

Musilova 1, Brno 61400

tel. 541 212 577

www.konektor.cz



## NYLON-FULLY INSULATED

**DOUBLE CRIMP**

**MALE BULLETS**

尼龙全绝缘子弹形公插加铜套

FUNNEL ENTRY

Brass Thickness(铜板厚度):t



ITEM NO 品名	DIMENSIONS 尺寸 inch(mm)				STANDARD PACKING 包装方式 (PIECE)		WIRE RANGE 电线范围 A.W.G. mm <sup>2</sup>
	D	B	L	t	BOX 盒子	CARTON 纸箱	
AEM1.25-156AD-TR	0.169(4.30)	0.157(4.00)	0.984(25.00)	0.016(0.40)	1,000	6,000	22-16 A.W.G. 0.5-1.5 mm <sup>2</sup>
AEM2-156AD-TR	0.197(5.00)	0.157(4.00)			1,000	6,000	16-14 A.W.G. 1.5-2.5 mm <sup>2</sup>
AEM2-195AD-TR		0.197(5.00)	1,000		6,000		
AEM5.5-156AD-TR	0.260(6.60)	0.157(4.00)	1.083(27.50)		500	3,000	12-10 A.W.G. 4-6 mm <sup>2</sup>
AEM5.5-195AD-TR		0.197(5.00)			500	3,000	



**KONEKTORY BRNO s.r.o.**

Musilova 1, Brno 61400

tel. 541 212 577

www.konektor.cz