

SUMMARY

Wires

| | |
|---------|---|
| Low | 0 |
| High | 0 |
| Coax | 0 |
| Triax | 0 |
| Quad | 0 |
| Fiber | 0 |
| Fluidic | 0 |

| | |
|------------------|-------------------------|
| Series | 1B |
| Termination type | No contacts / Accessory |
| IP rating | 0 |
| Cable Ø | 4.00 - 4.40 mm |
| Status | active |
| Alternative part | |



Image is for illustrative purpose only

Download

[Request a quote](#)

[Catalog](#)

TECHNICAL DETAILS

Mechanics

| | |
|-------------------|--|
| Shell Style/Model | GMA*: Bend relief Black |
| Keying | No keying |
| Housing Material | Thermoplastic polyurethane elastomer(Desmopan 786) |
| Variant | N : Black |
| Weight | .88 g |

Performance

| |
|---------------|
| Configuration |
| Insulator |
| Rated Current |


Others

| |
|---------------------------------|
| Temp (min / max): -40°C / +80°C |
| IP Rating: 0 |

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

DRAWINGS

Draws

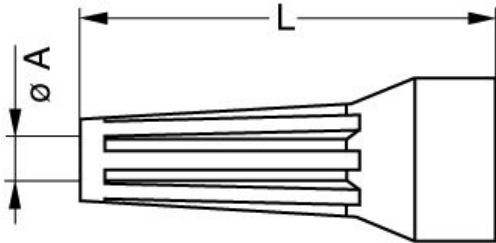

No keying

Dimensions

| | A | L |
|-----|------|------|
| mm. | 4 | 30 |
| in. | 0,16 | 1,18 |

RECOMMENDED BY LEMO

Tools

None

Cables

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.