


Smrštitelné trubice středněsilné s lepidlem

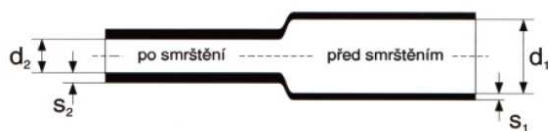

Teplotní stálost: -55°C až +110°C
 Smršťovací teplota: +120°C
 Dielektrická pevnost: 20 kV/mm

| Označení | | Barva | Rozměry (mm) | | |
|--------------|--------------|--------------|----------------|----------------|----------------|
| délka 1m | délka 1,22m | | d ₁ | d ₂ | s ₂ |
| RPK 8/2 | CFM 8/2 A | černá | 8,0 | 2,0 | 1,6 |
| RPK 9/3 | CFM 9/3 A | černá | 9,0 | 3,0 | 1,7 |
| RPK 9/3 žž | - | žluto-zelená | 9,0 | 3,0 | 1,7 |
| RPK 12/4 | CFM 12/4 A | černá | 12,0 | 4,0 | 2,0 |
| RPK 12/4 žž | - | žluto-zelená | 12,0 | 4,0 | 2,0 |
| RPK 16/5 | CFM 16/5 A | černá | 16,0 | 5,0 | 2,2 |
| RPK 17/3 | - | černá | 17,0 | 3,0 | 2,5 |
| RPK 19/6 | CFM 19/6 A | černá | 19,0 | 6,0 | 2,2 |
| RPK 19/6 žž | - | žluto-zelená | 19,0 | 6,0 | 2,2 |
| RPK 22/6 | CFM 22/6 A | černá | 22,0 | 6,0 | 2,5 |
| RPK 25/8 | CFM 25/8 A | černá | 25,0 | 8,0 | 2,5 |
| RPK 25/10 žž | - | žluto-zelená | 25,0 | 8,0 | 2,5 |
| RPK 28/9 | CFM 28/9 A | černá | 28,0 | 9,0 | 2,5 |
| RPK 33/8 | CFM 33/8 A | černá | 33,0 | 8,0 | 2,5 |
| RPK 33/11 | CFM 33/11 A | černá | 33,0 | 11,0 | 2,5 |
| RPK 35/12 žž | - | žluto-zelená | 35,0 | 12,0 | 2,5 |
| RPK 40/12 | CFM 40/12 A | černá | 40,0 | 12,0 | 2,5 |
| RPK 40/16 žž | - | žluto-zelená | 40,0 | 16,0 | 2,5 |
| RPK 55/16 | CFM 55/16 A | černá | 55,0 | 16,0 | 2,7 |
| RPK 65/19 | CFM 65/19 A | černá | 65,0 | 19,0 | 2,8 |
| RPK 75/22 | CFM 75/22 A | černá | 75,0 | 22,0 | 3,0 |
| RPK 85/25 | CFM 85/25 A | černá | 85,0 | 25,0 | 3,0 |
| RPK 95/25 | CFM 95/25 A | černá | 95,0 | 25,0 | 3,0 |
| RPK 115/34 | CFM 115/34 A | černá | 115,0 | 34,0 | 3,0 |
| RPK 140/42 | CFM 140/42 A | černá | 140,0 | 42,0 | 3,0 |
| RPK 160/50 | CFM 160/50 A | černá | 160,0 | 50,0 | 3,0 |
| RPK 175/58 | CFM 175/58 A | černá | 175,0 | 58,0 | 3,0 |
| RPK 210/65 | CFM 210/65 A | černá | 210,0 | 65,0 | 3,0 |
| RPK 230/75 | CFM 230/75 A | černá | 230,0 | 75,0 | 3,0 |