


Lisovací dutinky s izolací

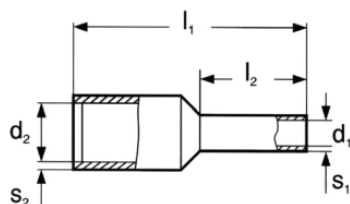

Použitý materiál: dutinka - měď galvanicky cínovaná



izolace - Polypropylen (PP)

Teplotní stálost izolace: -55°C až +105°C

Vyrobeno dle normy: DIN 46228

Průřez (mm ²)	Označení	Kód			Rozměry (mm)					Hmotnost	Balení		
		1. N	2. F	3. DIN	l ₁	l ₂	d ₁	d ₂	s ₁	s ₂	(kg/1000ks)	(ks)	
0,14	DI 0,14-6				10,4	6,0	0,70	1,6	0,12	0,20	0,036	100, 500	
	DI 0,14-8				12,4	8,0	0,70	1,6	0,12	0,20	0,043	100, 500	
0,25	DI 0,25-6				10,5	6,0	0,75	2,0	0,25	0,25	0,043	100, 500	
	DI 0,25-8				12,5	8,0	0,75	2,0	0,25	0,25	0,051	100, 500	
	DI 0,25-12				16,5	12,0	0,75	2,0	0,25	0,25	0,066	100, 500	
0,34	DI 0,34-6					10,5	6,0	0,75	2,0	0,25	0,25	0,045	100, 500
	DI 0,34-8					12,5	8,0	0,75	2,0	0,25	0,25	0,052	100, 500
	DI 0,34-12					16,5	12,0	0,75	2,0	0,25	0,25	0,068	100, 500
0,50	DI 0,5-6				12,0	6,0	1,00	2,6	0,15	0,25	0,064	100, 500	
	DI 0,5-8				14,0	8,0	1,00	2,6	0,15	0,25	0,073	100, 500	
	DI 0,5-10				16,0	10,0	1,00	2,6	0,15	0,25	0,086	100, 500	
	DI 0,5-12				18,0	12,0	1,00	2,6	0,15	0,25	0,094	100, 500	
0,75	DI 0,75-6				12,0	6,0	1,20	2,8	0,15	0,25	0,075	100, 500	
	DI 0,75-8				14,0	8,0	1,20	2,8	0,15	0,25	0,088	100, 500	
	DI 0,75-10				16,0	10,0	1,20	2,8	0,15	0,25	0,097	100, 500	
	DI 0,75-12				18,0	12,0	1,20	2,8	0,15	0,25	0,108	100, 500	
	DI 0,75-18				24,0	18,0	1,20	2,8	0,15	0,25	0,160	100, 500	
1,0	DI 1,0-6				12,0	6,0	1,40	3,0	0,15	0,25	0,088	100, 500	
	DI 1,0-8				14,0	8,0	1,40	3,0	0,15	0,25	0,100	100, 500	
	DI 1,0-10				16,0	10,0	1,40	3,0	0,15	0,25	0,116	100, 500	
	DI 1,0-12				18,0	12,0	1,40	3,0	0,15	0,25	0,128	100, 500	
	DI 1,0-18				24,0	18,0	1,40	3,0	0,15	0,25	0,190	100, 500	
1,5	DI 1,5-6				12,0	6,0	1,70	3,5	0,15	0,25	0,101	100, 500	
	DI 1,5-8				14,0	8,0	1,70	3,5	0,15	0,25	0,117	100, 500	
	DI 1,5-10				16,0	10,0	1,70	3,5	0,15	0,25	0,133	100, 500	
	DI 1,5-12				18,0	12,0	1,70	3,5	0,15	0,25	0,150	100, 500	
	DI 1,5-18				24,0	18,0	1,70	3,5	0,15	0,25	0,194	100, 500	
2,5	DI 2,5-6				12,0	6,0	2,20	4,2	0,15	0,25	0,139	100, 500	
	DI 2,5-8				14,0	8,0	2,20	4,2	0,15	0,25	0,149	100, 500	
	DI 2,5-10				16,0	10,0	2,20	4,2	0,15	0,25	0,164	100, 500	
	DI 2,5-12				18,0	12,0	2,20	4,2	0,15	0,25	0,182	100, 500	
	DI 2,5-18				24,0	18,0	2,20	4,2	0,15	0,25	0,247	100, 500	
	DI 2,5-25				31,0	25,0	2,20	4,2	0,15	0,25	0,340	100, 500	
4	DI 4-8				15,0	8,0	2,80	4,8	0,20	0,30	0,221	100, 500	
	DI 4-10				17,0	10,0	2,80	4,8	0,20	0,30	0,261	100, 500	
	DI 4-12				20,0	12,0	2,80	4,8	0,20	0,30	0,287	100, 500	
	DI 4-18				26,0	18,0	2,80	4,8	0,20	0,30	0,417	100	
6	DI 6-12				20,0	12,0	3,50	6,3	0,20	0,30	0,405	100	
	DI 6-18				26,0	18,0	3,50	6,3	0,20	0,30	0,521	100	
10	DI 10-12				22,0	12,0	4,50	7,6	0,20	0,40	0,540	100	
	DI 10-18				28,0	18,0	4,50	7,6	0,20	0,40	0,650	100	

Lisovací dutinky s izolací



Použitý materiál: dutinka - měď galvanicky cínovaná

izolace - Polypropylen (PP)

Teplotní stálost: -55°C až +105°C

Vyrobeno dle normy: DIN 46228

Průřez (mm ²)	Označení	Kód			Rozměry (mm)						Hmotnost (kg/1000ks)	Balení (ks)
		1. N	2. F	3. DIN	l ₁	l ₂	d ₁	d ₂	s ₁	s ₂		
16	DI 16-12				24,0	12,0	5,8	8,8	0,2	0,4	0,650	100
	DI 16-18				28,0	18,0	5,8	8,8	0,2	0,4	0,800	100
25	DI 25-16				29,0	16,0	7,3	11,2	0,2	0,4	1,600	50
	DI 25-18				31,0	18,0	7,3	11,2	0,2	0,4	1,700	50
	DI 25-22				36,0	22,0	7,3	11,2	0,2	0,4	2,000	50
35	DI 35-16				30,0	16,0	8,3	12,7	0,2	0,4	1,900	50
	DI 35-18				32,0	18,0	8,3	12,7	0,2	0,4	2,100	50
	DI 35-25				39,0	25,0	8,3	12,7	0,2	0,4	2,500	50
50	DI 50-20				36,0	20,0	10,3	15,0	0,3	0,5	3,300	50
	DI 50-25				40,0	25,0	10,3	15,0	0,3	0,5	3,600	50
	DI 50-30				45,0	30,0	10,3	15,0	0,3	0,5	3,900	50
70	DI 70-20				37,0	20,0	12,5	16,0	0,4	0,6	4,620	25
	DI 70-25				42,0	25,0	12,5	16,0	0,4	0,6	4,920	25
95	DI 95-25				44,0	25,0	14,5	18,0	0,4	0,6	6,000	25
	DI 95-30				49,0	30,0	14,5	18,0	0,4	0,6	6,350	25
120	DI 120-27				48,0	27,0	16,5	21,0	0,5	0,7	7,850	25
	DI 120-34				55,0	34,0	16,5	21,0	0,5	0,7	8,250	25
150	DI 150-32				58,0	32,0	19,3	23,0	0,5	1,0	12,330	25