


D

C

B

A

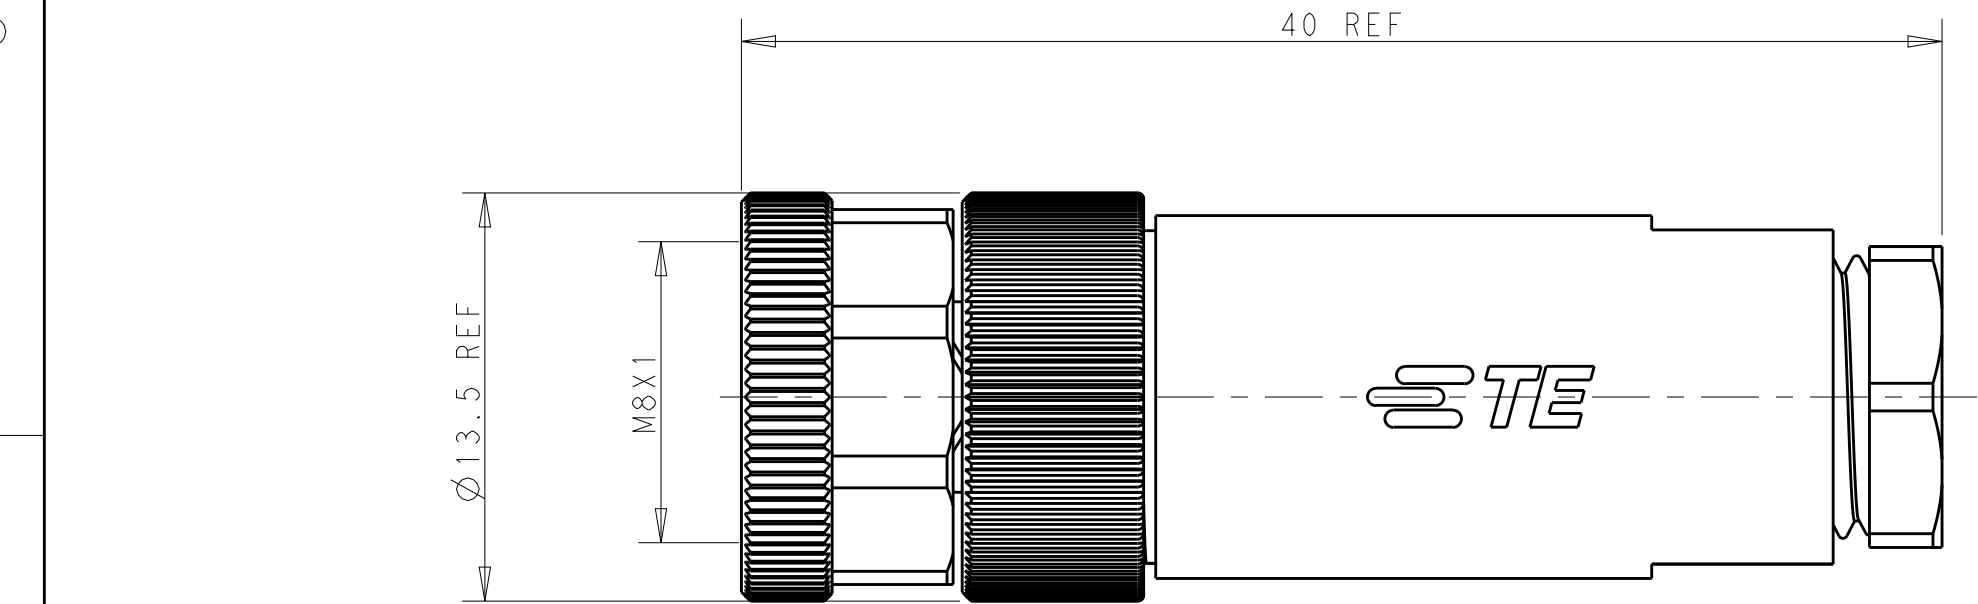


OPERATION TEMPERATURE	-40~85°C	-40~85°C
DEGREE OF PROTECTION	IP67	IP67
INSULATION RESISTANCE	>100MΩ	>100MΩ
MATERICAL GROUP	II	II
OVERVOLTAGE CATEGOYR	II	II
POLLUTION DEGREE	3	3
RATED CURRENT	3A	3A
RATED VOLTAGE	30V	60V
TECHNICAL DATA	T401000804X-000	T401000803X-000

- NOTES;
- PARTS MATERIAL DATA:SEE TABLE1
 - CONTACT FINISH:
GOLD OVER NICKEL OR SILVER OVER NICKEL
 - CABLE WIRES:
26AWG/0.14mm² Min & 24AWG/0.25mm² Max
 - ALL DIMENSIONS ARE FOR NOMINAL REFERENCE ONLY UNLESS OTHERWISE STATE
 - PACKAGIN: 1 PIECE IN A BAG
 - PN INFORMATION FOR ASSEMBLY PARTS
T401000XXXX-000

- CONTACT FINISH:
1:GOLD OVER NICKEL
2:SILVER OVER NICKEL
- NUMBERS OFPINS:
03:3 PINS
04:4 PINS
...
- CABLE OUTLET:
8:PLASTIC(CABLE FEED:3.5~4.8mm)
9:METAL(CABLE FEED:3.5~5.0mm)
...

TABLE1

PBT	PRESS SCREW	6			
PBT	STRAIGHT PLASTIC HOUSING	5			
BRASS	M8 SCTREW ASSY REC TERMINAL	4			
BRASS	M8 SCREW ASSY OUT SCREW	3			
BRASS	M8,FEMALE INSERT NUT	2			
PA	M8,FEMALE HSG,A CODE,4PIN	1	T4010008042-000	RPC-M8-FS-4CON-PG7-M	OBSOLETE
	M8,FEMALE HSG,A CODE,3PIN		T4010008041-000	RPC-M8-FS-4CON-PG7-MU	
MATERIAL	DESCRIPTION	ITEM	T4010008032-000	RPC-M8-FS-3CON-PG7-M	OBSOLETE
			T4010008031-000	RPC-M8-FS-3CON-PG7-MU	
			TE PN	TYPE	

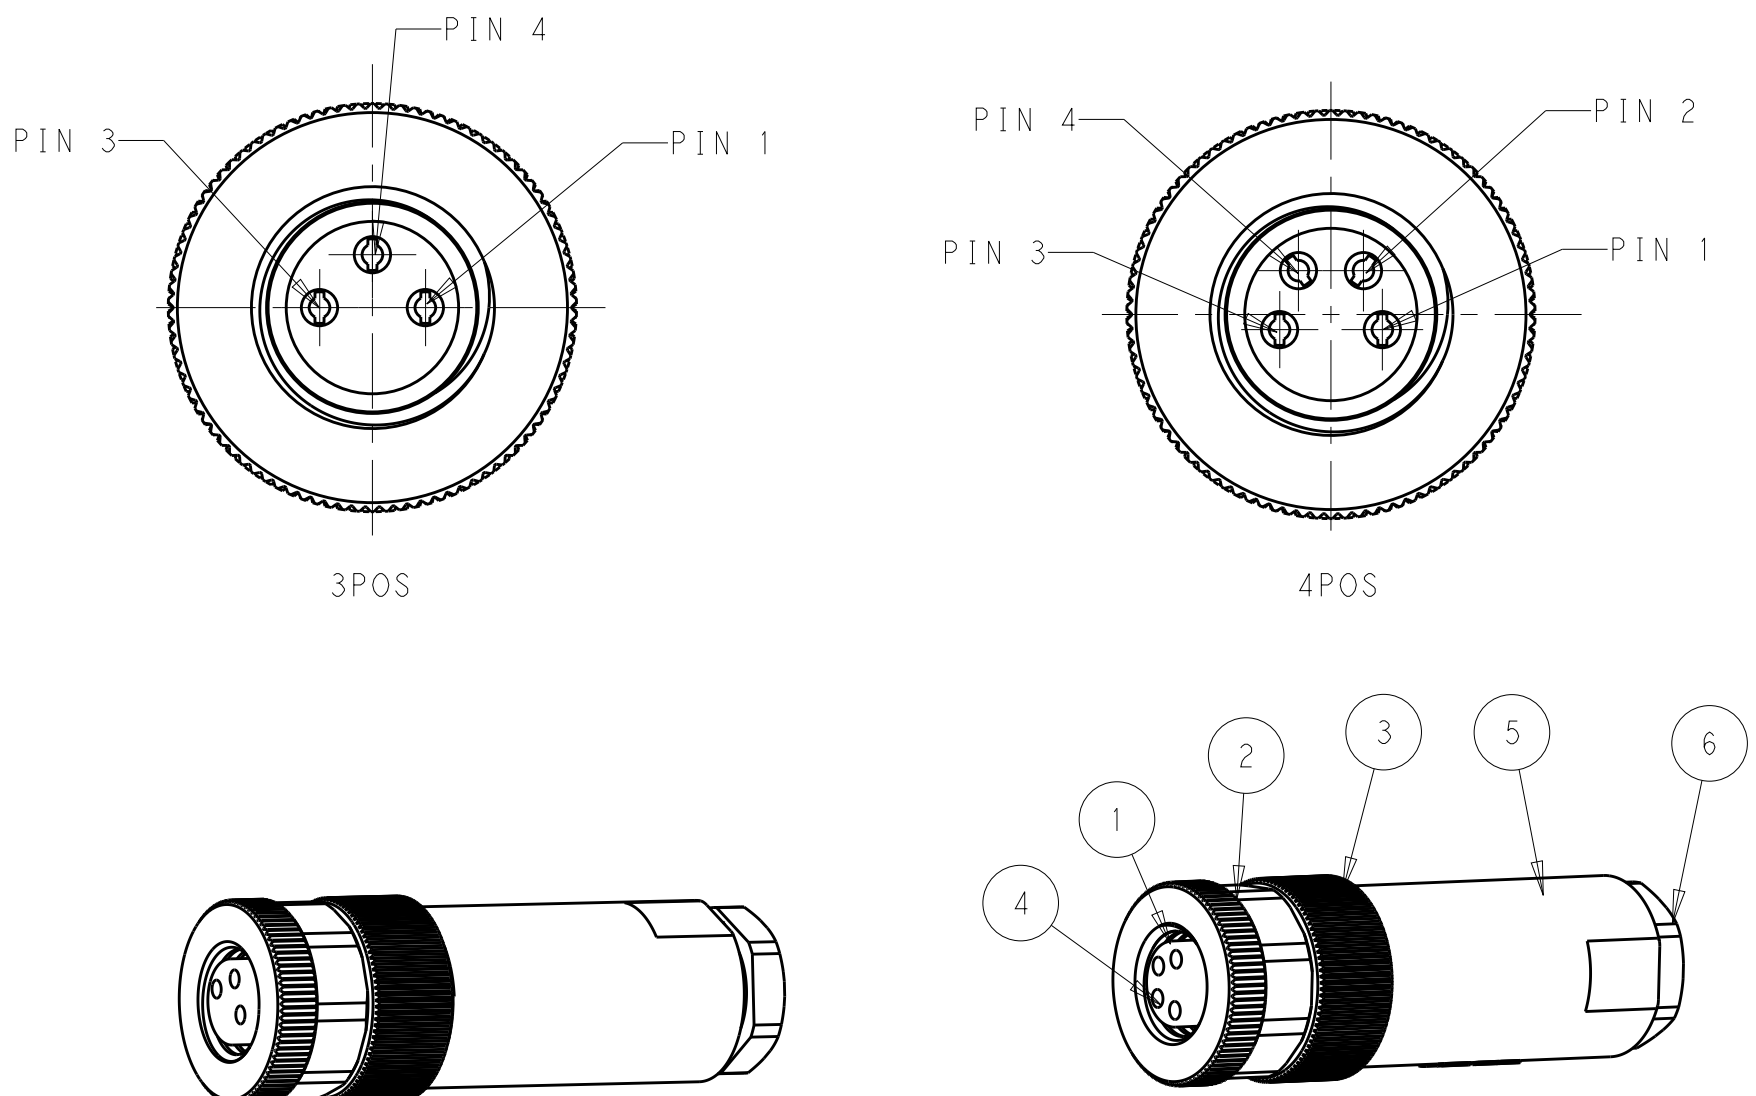

- 注意事项;
- 零件材料参见附表1
 - 表面处理:镀金
 - 适用线材:26AWG/0.14mm² Min & 24AWG/0.25mm² Max
 - 所有尺寸标注为基本参考,除非其它说明
 - 包装:每BAG装1PC
 - 料号数字代码参考上表

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN LEAR ZHANG CHK KOBBY ZHAO APVD XU XIANG	12APR2016 12APR2016 12APR2016	TE Connectivity			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME M8 FEMALE SCREW ASSY STRAIGHT UNSHIELDING CONNECTOR			
MATERIAL		FINISH		SIZE A2			
-		-		CAGE CODE -			
-		-		DRAWING NO T40100080XX000			
-		-		RESTRICTED TO -			
-		-		SCALE 2:1			
-		-		SHEET 1 OF 1			
-		-		REV C			