
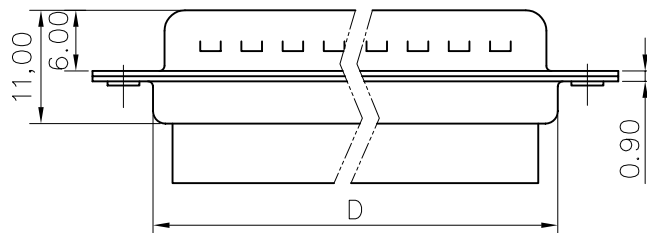
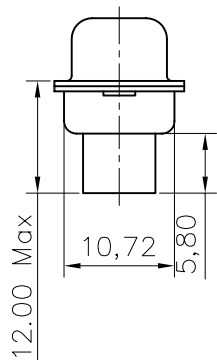


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

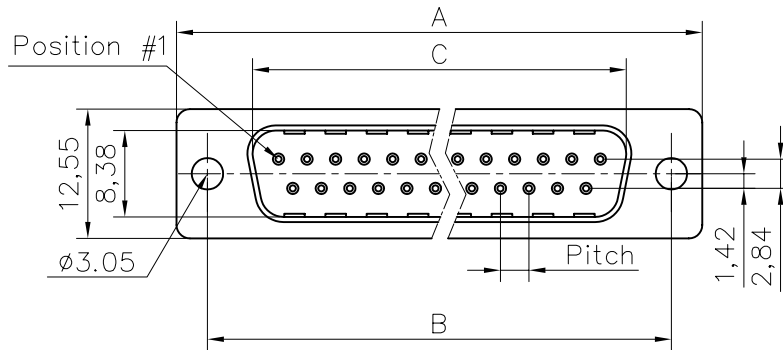

Customer drawing

DIM.S SHELL	A	B	C	E	Pitch
9	30.84	24.99	16.92	19.28	2.74
15	39.24	33.32	24.70	27.51	2.74
25	53.04	47.04	38.96	41.30	2.77
37	69.32	63.50	55.42	57.71	2.77

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
1			01/04/08	

D-SUB TECHNICAL DATA

SHELL : Steel 2.5um (100u") min tin over 1.25um (50u") min nickel
BODY : Glass filled thermoplastic.
Flame retardant to UL94 V-0 Color Black
ELECTRICAL : Voltage rating : 1000 V RMS at 60 Hz
Insulation resistance >1000 M Ohms
CLIMATIC : Temperature range -55 °C up to 125°C
MARKING : Amphenol-...(Series No.)
Commercial reference
Manufacturing date

PRODUCT CODE

L 777RR X XX P

L: RoHS Compliance

777RR: tinned shell +
dimples for plug

Shell Size: E,A,B,C

Contact type:
P: Male

Configuration: 09,15,25,37

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		DATE	Amphenol	
U.S.	METRIC	DRAWN	Christina.cui	01/04/08		
.X +/-	0.50	CHECKED	lik.wang	01/04/08		
.XX +/-	0.30	CHECKED				
.XXX +/-	0.20				TITLE	
FRACTIONS +/-	2"	DRAWING FILE :			stamped and formed connector, RR series	
ANGLES +/-		ANGLE OF PROJECTION			SIZE DRAWING NO.	
REMOVE SHARP EDGES					REV.	
DIMENSIONS					A4 C L777RRXXXP	
U.S.	INCHES				SCALE	
METRIC	MM				NONE SHEET 1 OF 1	