

ORDER INFORMATION

2 5 4 - X X W




SPECIFICATIONS

Current Rating: 2.5A AC, DC
 Voltage Rating: 250V AC, DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 10mΩ Max Δ
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1000V AC/minute
 Material: Nylon 66, UL94V-2

Ordering Information & Dimensions

PART NO.	Dimensions		
	A	B	C
254-02W	2.54	5.68	3.16
254-03W	5.08	8.22	5.70
254-04W	7.62	10.76	8.24
254-05W	10.16	13.30	10.78
254-06W	12.70	15.84	13.32
254-07W	15.24	18.38	15.86
254-08W	17.78	20.92	18.40
254-09W	20.32	23.46	20.94
254-10W	22.86	26.00	23.48
254-11W	25.40	28.54	26.02
254-12W	27.94	31.08	28.56
254-13W	30.48	33.62	31.10
254-14W	33.02	36.16	33.64
254-15W	35.56	38.70	36.18
254-16W	38.10	41.24	38.72
254-17W	40.64	43.78	41.26
254-18W	43.18	46.32	43.80
254-19W	45.72	48.86	46.34
254-20W	48.26	51.40	48.88

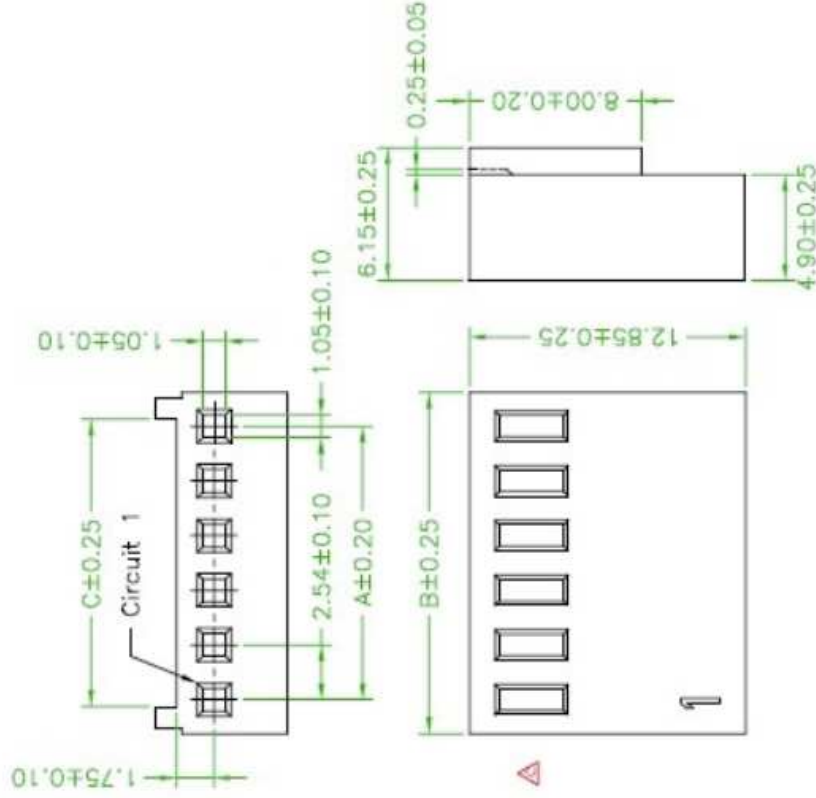

品名 TITLE		2.54mm HOUSING	
品號 PART NO.	254-XXW	日期 DATE	09/21/2005
圖號 DRAWING NO.	C	繪圖 DRAWN	
客戶品號 CUSTOMER P/N	254-XXW	核對 CHECKED	
公差 TOLERANCE	X ±0.35 XX ±0.30	核准 APPROVED	
版本 REV.	比例 SCALE	單位 UNIT	mm
	FREE		

Δ	C	Revised the drawing.	201104015
Δ	B	Revised the Contact Resistance: 20mΩ → 10mΩ	20101125
AREA	REV.	DESCRIPTION	DATE