

Part number

CXFA 6.0



Female crimp contact, CX series, 40 A, turned silver plated, wire cross section 6 mm², AWG 10


Product description		Material properties	
Product type	Crimp contact	Main material	Copper alloy
Series	CX	RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
Gender	Female	China RoHs - EFUP	50
Technical data		REACH SVHC substances	Yes Lead
Current	40 A	SCIP number	C0979fba-9907-458f-a94a-db781440f273
Wire cross-section	6,00 mm²	Approvals / Standards	
AWG size	10	Certifications	CSA, EAC
Contact type	Turned silver plated	UL	ECBT2
Further technical details		cUL	ECBT8
Weight	2,70 g	General ordering information	
Conductors stripping length	9,6 mm	EAN13 code	8015747042512
		eCl@ss 8.1	27440204
		ETIM 7.0	EC000796
Packaging Information			
		Packaging length	112,00 mm
		Packaging height	95,00 mm
		Packaging width	117,00 mm
		Packaging weight	1,28 kg
		Packaging volume	1,24 dm³
		Packaging description	Carton box
		Packaging quantity	400 Pcs
		Packaging EAN code	8015747207065
		Sub-packaging length	50,00 mm
		Sub-packaging height	44,00 mm
		Sub-packaging width	50,00 mm
		Sub-packaging weight	0,16 kg
		Sub-packaging volume	0,11 dm³
		Sub-packaging description	Plastic box
		Sub-packaging quantity	50 Pcs
		Sub-packaging EAN barcode	8015747042529

Part number

CXFA 6.0



Catalogue drawings

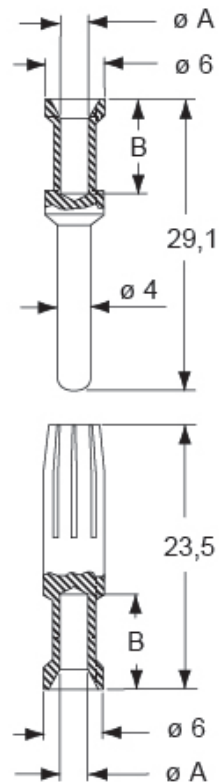

CXF and CXM contacts

conductor cross-sectional area (mm ²)	conductor slot ø A (mm)	conductor stripping length B (mm)
1,5	1,8	9
2,5	2,2	9
4	2,85	9,6
6	3,5	9,6
10	4,3	15

Notes

Dimensions shown in mm are not binding and may be changed without notice.

California Proposition 65 Information



WARNING

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to www.P65Warnings.ca.gov.
