
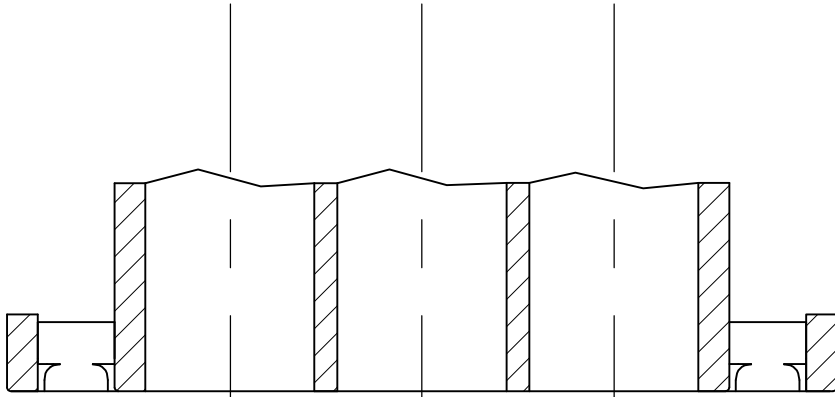
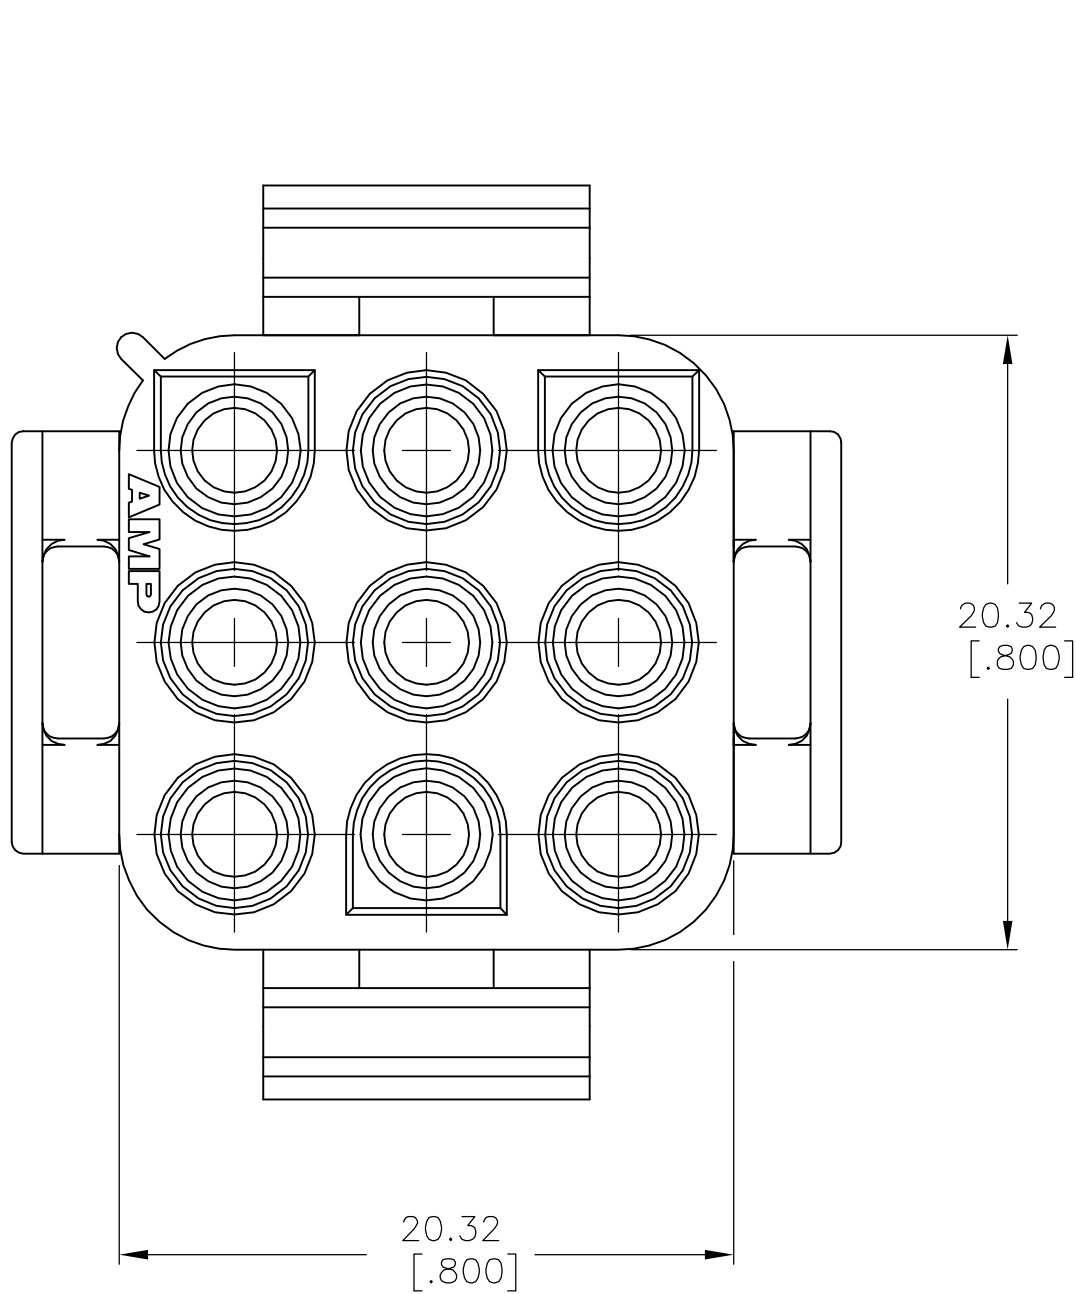





LOC		DIST		REVISIONS						
CM		00		P	LTR	DESCRIPTION		DATE	DWN	APVD
					AL1	REVISED PER ECR-17-008392		26JUN2017	BW	KR

1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ CAP OR HEADER.
2. SMALL NICKS ARE PERMITTED ON THE CIRCUIT TOWERS WHICH COULD INCREASE THE INITIAL HOUSING MATING FORCE BY UP TO 4.4 NEWTONS [1.0 LBS]. NO INDIVIDUAL NICKED TOWER SHALL INCREASE THIS FORCE BY OVER 2.2 NEWTONS [.5 LBS].
3. DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.


4. FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
5. UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.
6. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

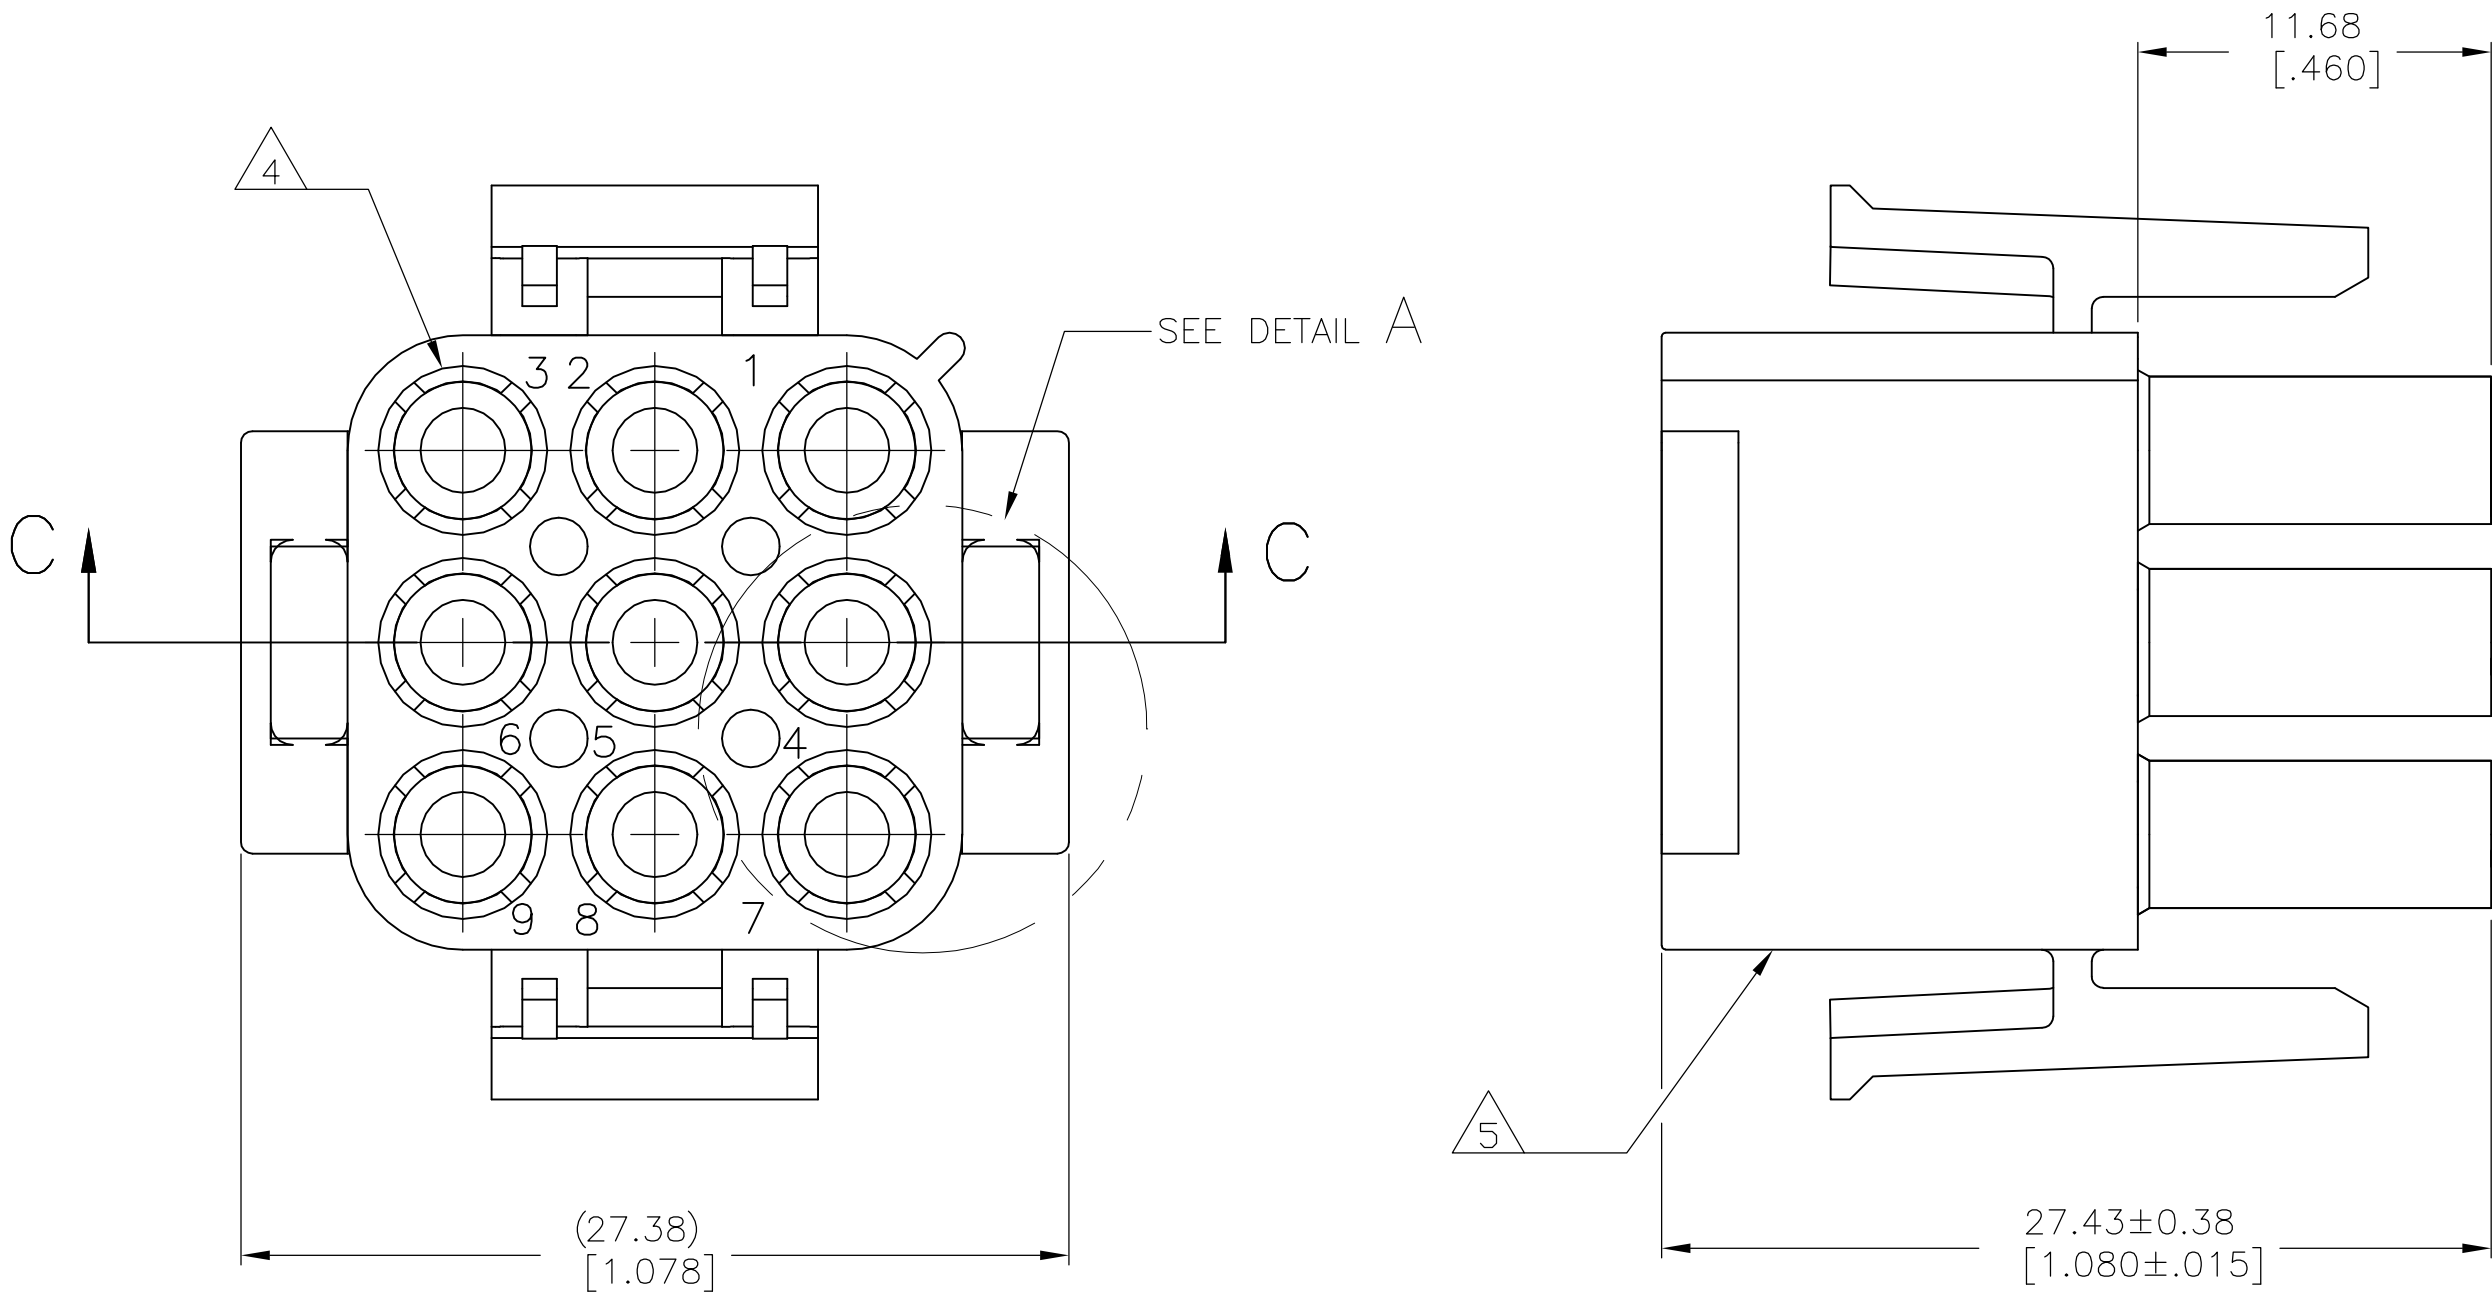

PARTIAL SECTION C-C

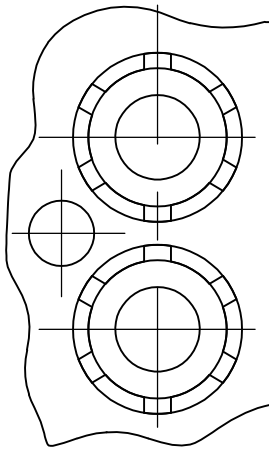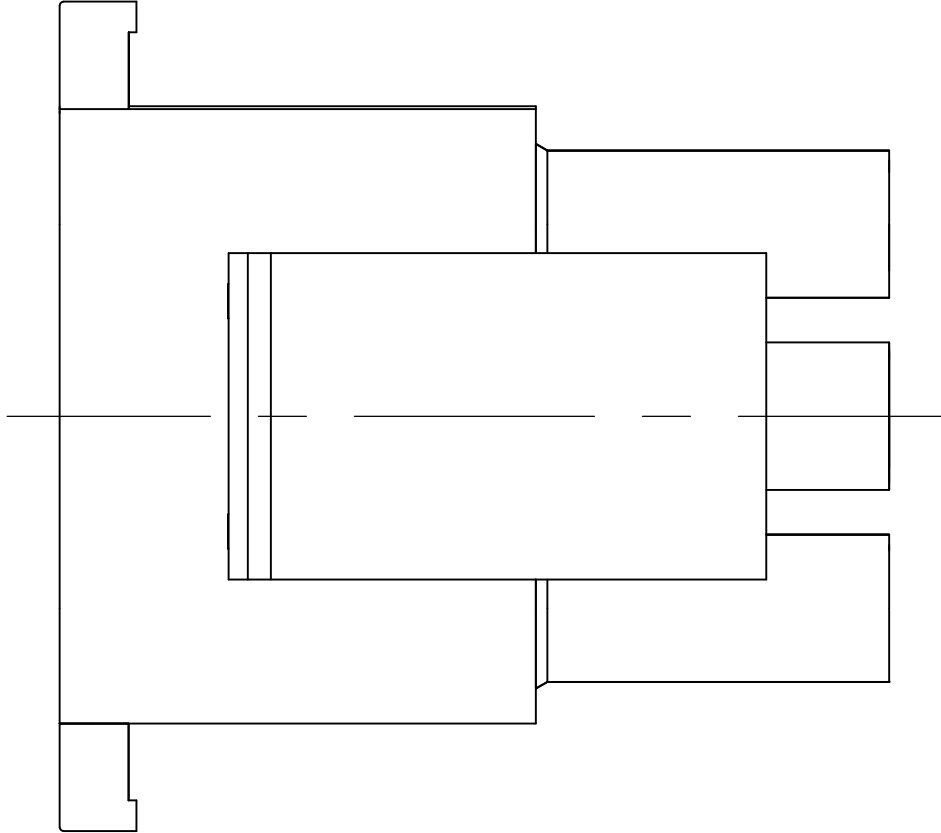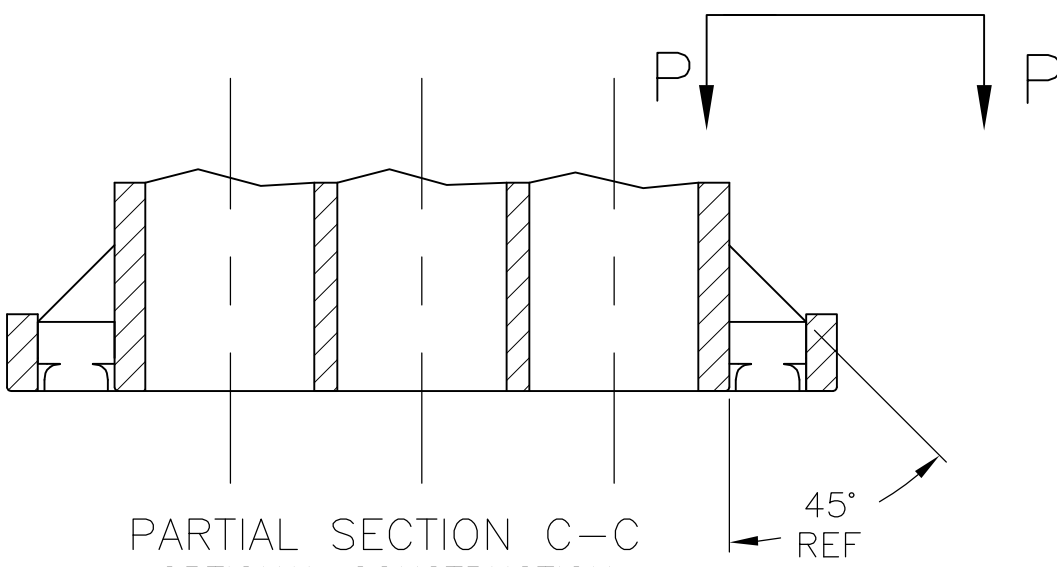

PARTIAL DETAIL A
OPTIONAL CONSTRUCTIONS

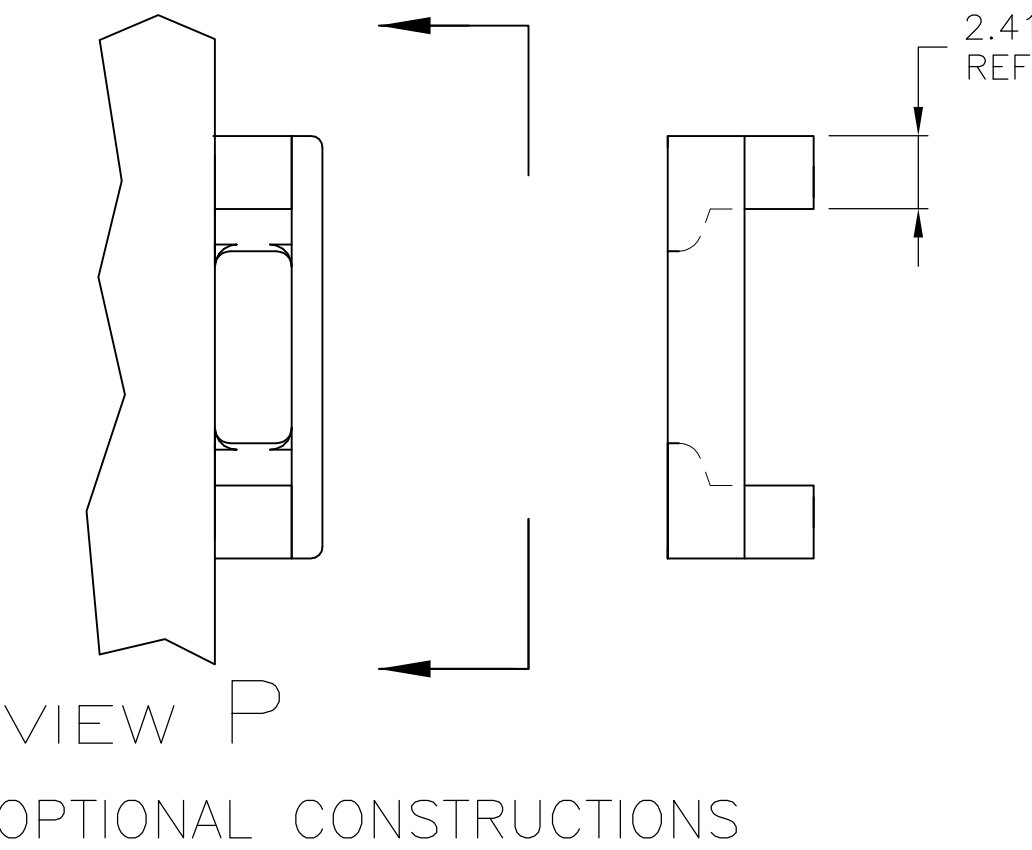






VIEW P
OPTIONAL CONSTRUCTIONS

6	SUPERCEDED BY 1-480706-0	OBSOLETE	BLACK	1-480706-9
			GRAY	1-480706-8
			BLUE	1-480706-6
			GREEN	1-480706-5
			YELLOW	1-480706-4
			ORANGE	1-480706-3
			RED	1-480706-2
			BROWN	1-480706-1
			NATURAL	1-480706-0
			COLOR	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 01SEP04	 TE Connectivity					
DIMENSIONS: mm [INCHES]		CHK S. RIDGILL 01SEP04						
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME PLUG, 9 CIRCUIT, UNIVERSAL MATE-N-LOK™	SIZE A1	CAGE CODE 00779	DRAWING NO C=480706	RESTRICTED TO —	
	0 PLC	±						—
	1 PLC	±						—
	2 PLC	±						0.13 [.005]
	3 PLC	±						—
4 PLC	±	—						
ANGLES		±	0°30'					
FINISH		—						
MATERIAL NYLON, UL94V-2		WEIGHT						
		CUSTOMER DRAWING	SCALE 4:1 SHEET 1 OF 2 REV AL					

LOC	DIST	REVISIONS				
CM	00	P	LTR	DESCRIPTION	DATE	APVD
		—	—	SEE SHEET 1	—	—

1. STAMP NUMBERS 3.18 [.125] HIGH AT WIRE END OF HOUSING (12 POINT DAVID TYPE).
2. CHARACTERS TO BE POSITIONED ON HOUSING TO BE READ FROM WIRE END ONLY.
3. VIOLET,BLACK,BROWN,AND BLUE COLORED BLOCKS TO BE STAMPED WITH WHITE CHARACTERS. ALL OTHER COLORED BLOCKS TO BE STAMPED WITH BLACK CHARACTERS.

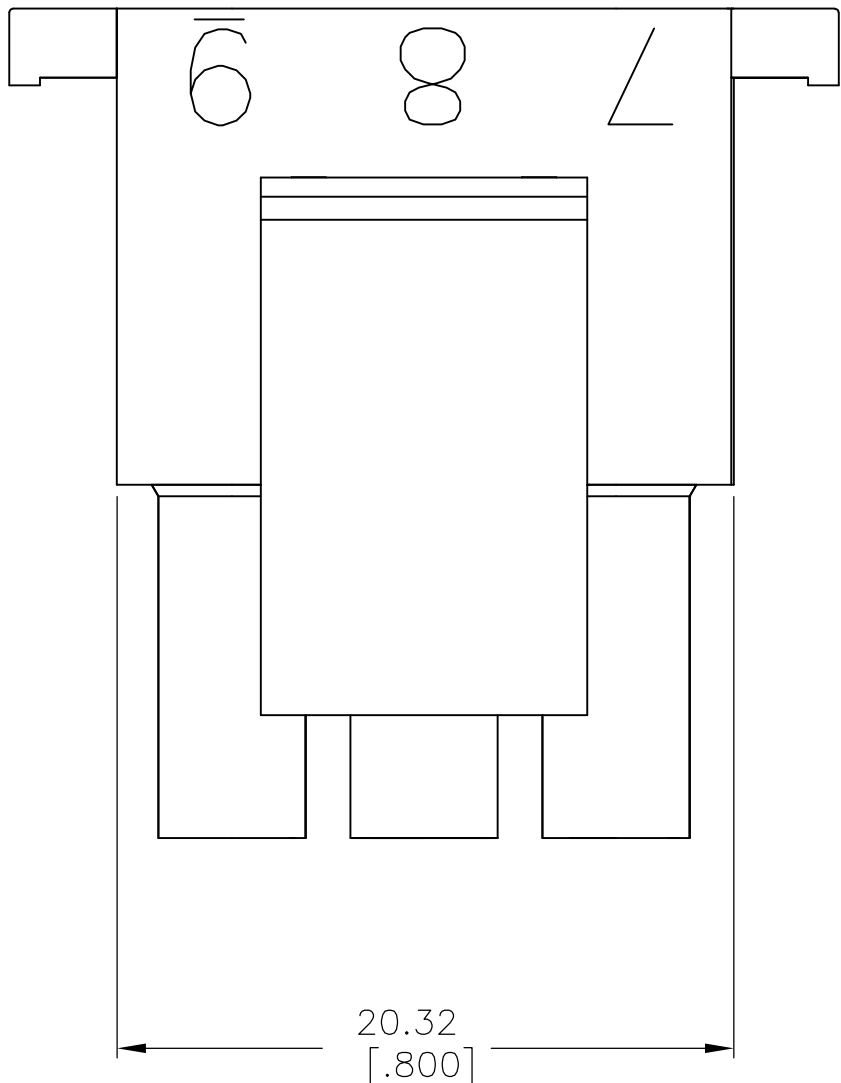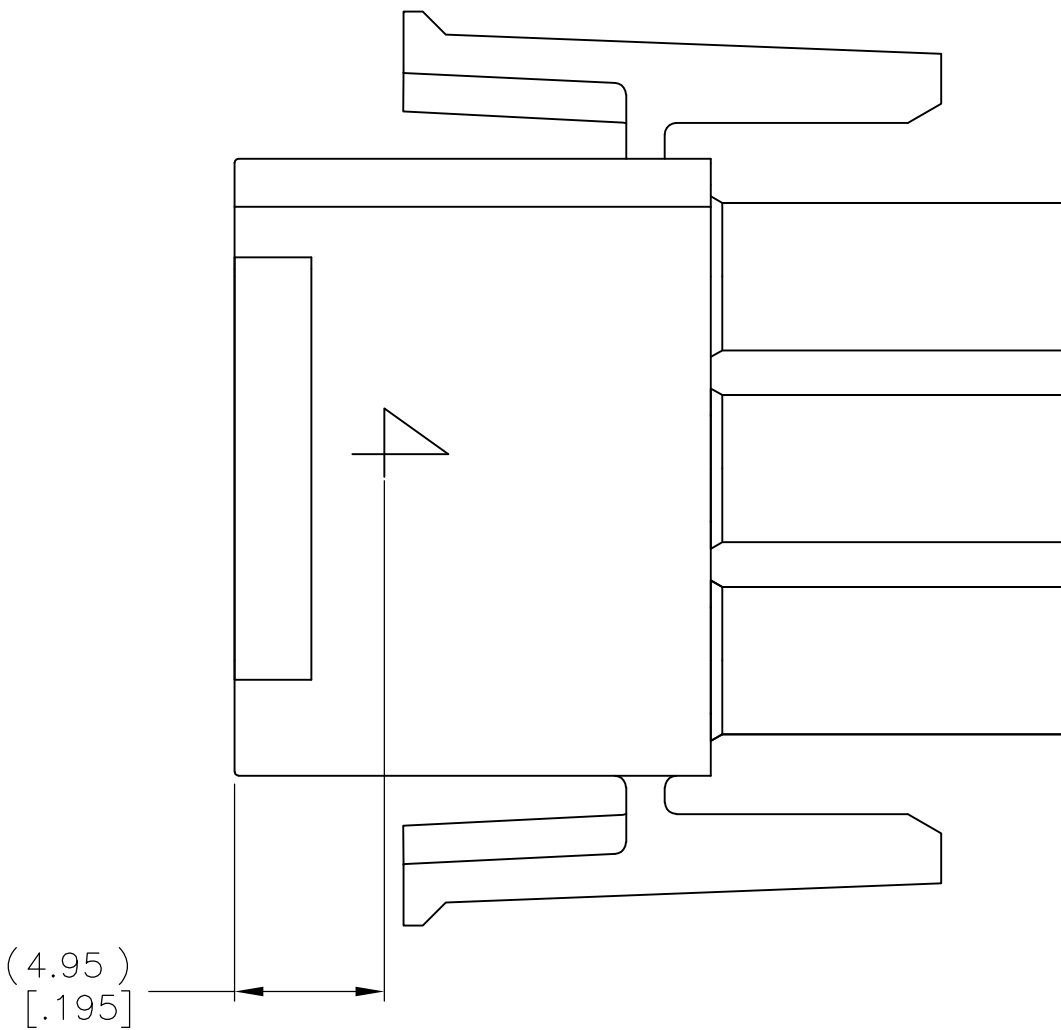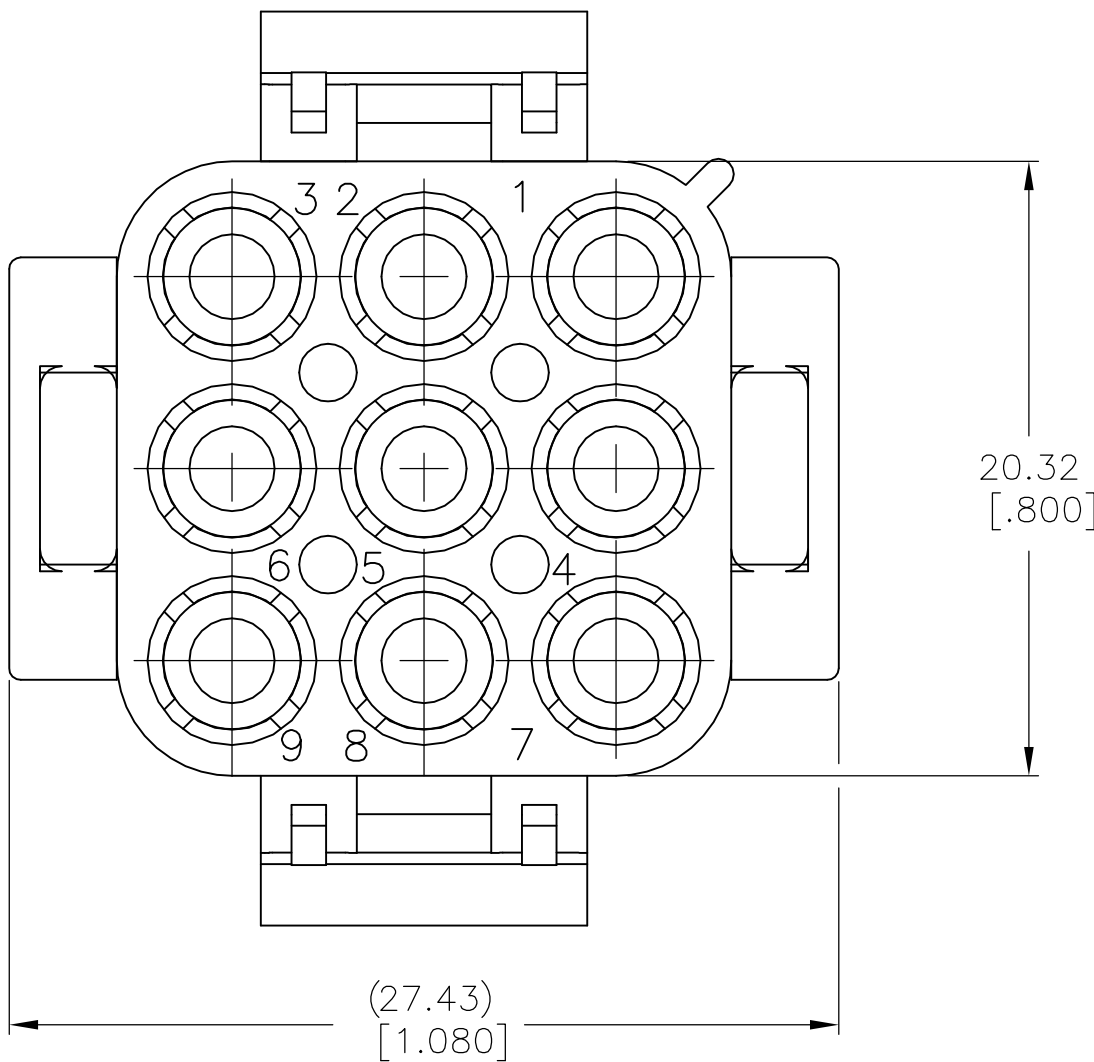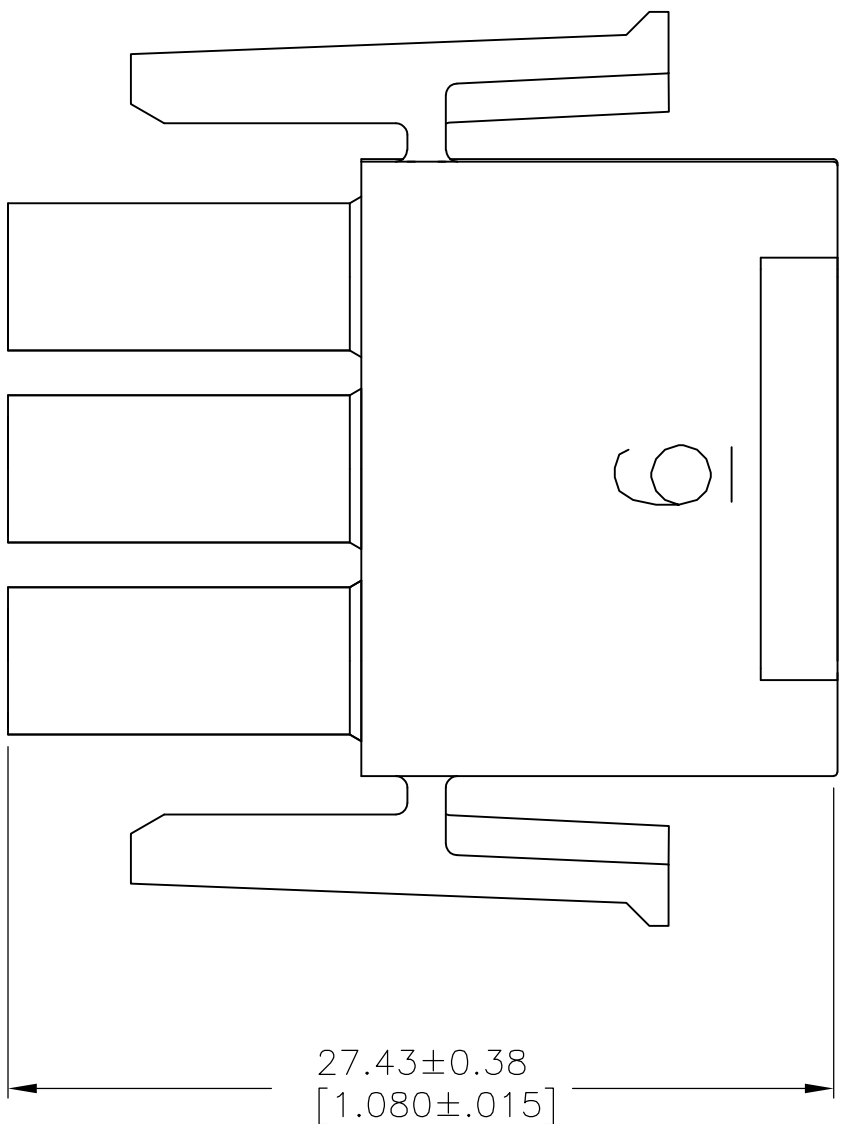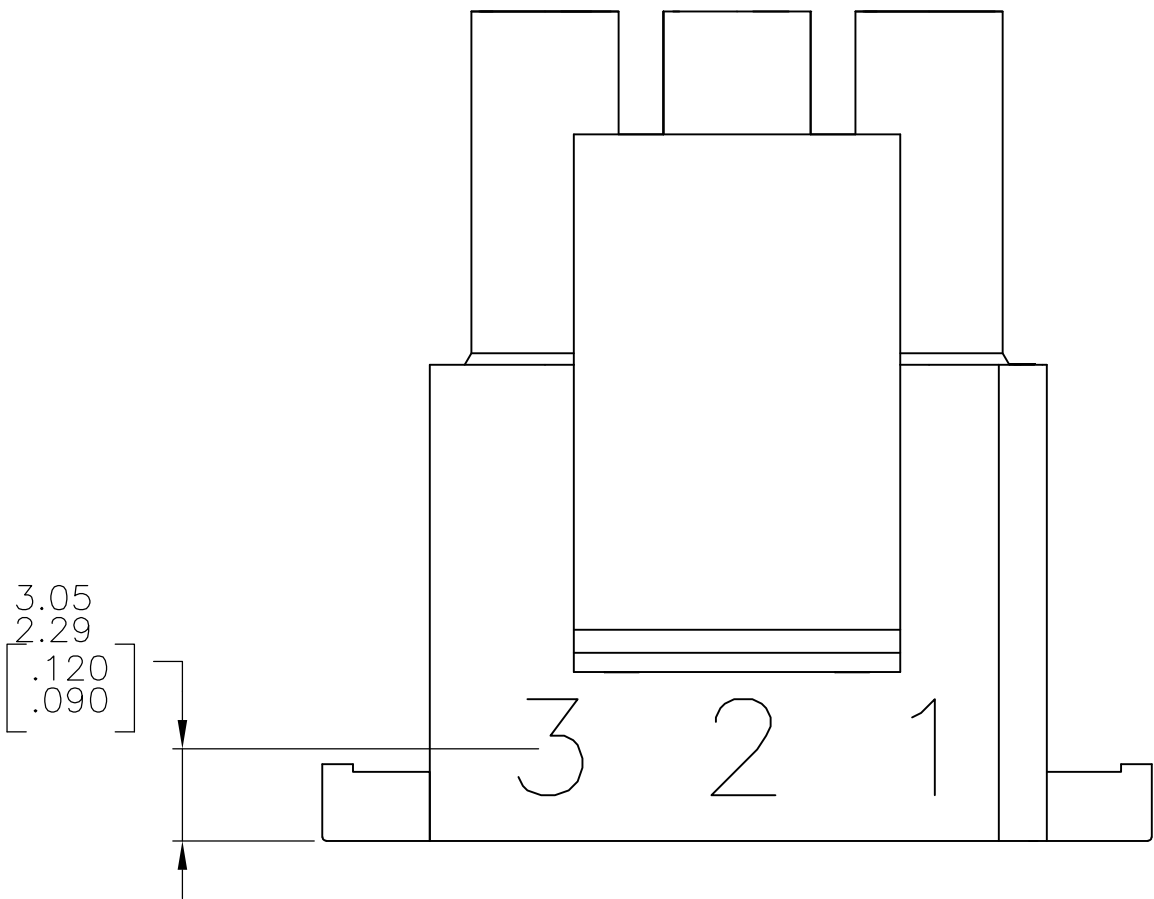

NATURAL	2-480706-0
COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 01SEP2004	TE Connectivity	
		CHK S. RIDGILL 01SEP2004		
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± 0.13 [.005] 3 PLC ± — 4 PLC ± — ANGLES ± 0°30'	APVD S. RIDGILL 01SEP2004	NAME PLUG, 9 CIRCUIT, UNIVERSAL MATE-N-LOK	
		PRODUCT SPEC		
	FINISH	APPLICATION SPEC		
		WEIGHT		
MATERIAL	—	—	SIZE A1	CAGE CODE 00779
		CUSTOMER DRAWING	SCALE 4:1	SHEET 2
			OF 2	REV AL1