


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for the manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

D-SUB CRIMP TYPE

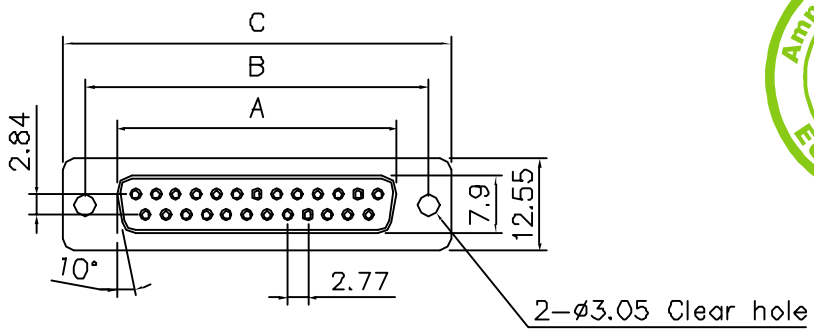

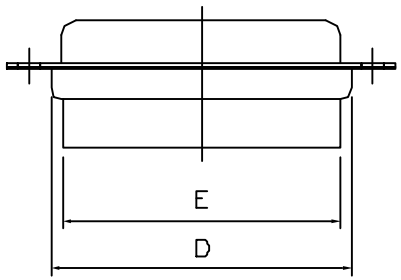



Specifications

Contact Resistance: Ω 30m max. at DC 100mA Ω
Insulator Resistance: 1000M min. at DC 500V
Current Rating: 5 AMP

Dielectric Withstanding

Voltage: AC 1200V For 1 minute
Operating Temperature: -55℃ ~ +105℃
Housing: PBT & 30% Glass Fiber (UL 94V-0)
Shells : Brass
Plating : pure Ton over Nickel

ROHS compliant
MSL components : level 3

L177RR - - S

Shell size

E = 09 ways
A = 15 ways
B = 25 ways
C = 37 ways

Nber of cts

09-15-25-37

Dimension

cavities	A	B	C	D	E
9	16.33	24.99	30.81	19.20	15.45
15	24.99	33.32	39.14	27.70	24.45
25	38.38	47.04	53.04	41.10	38.00
37	54.84	63.50	69.32	57.30	53.96

TOLERANCE m/m		APPROVALS	DATE
X.	0.05	DRAWN C.R	14/11/01
X.X	0.1	CHECKED JF.L	14/11/01
X.XX	0.3	APPROVED JF.L	14/11/01
UNLESS OTHERWISE SPECIFIED		UNIT: MM	SIZE: A4

TITLE: RR SERIES D-SUB CONNECTOR CRIMP VERSION PLUG

AMPHENOL
AMPHENOL SOCAPEX
Dole Plant

Scale N.A. | Sheet 1 of 1

DRAWING N° L177RR - - S

REV. A