


THIS DRAWING IS UNPUBLISHED.
 VERTRAULICHE UNVERÖFFENTLICHTE ZEICHNUNG
 © COPYRIGHT - By -
 RELEASED FOR PUBLICATION
 FREI FUER VERÖFFENTLICHUNG
 ALL RIGHTS RESERVED.
 ALLE RECHTE VORBEHALTEN

MATED WITH:
 PASSEND ZU:
 -

LOC	DIST	REVISIONS ÄNDERUNGEN		
AI	-	P	LTR	DESCRIPTION BESCHREIBUNG
PROJEKT NR.:		Z1	REVISED PER ECO-11-005150	DATE 21MAR11
				DWN RK
				APVD HMR

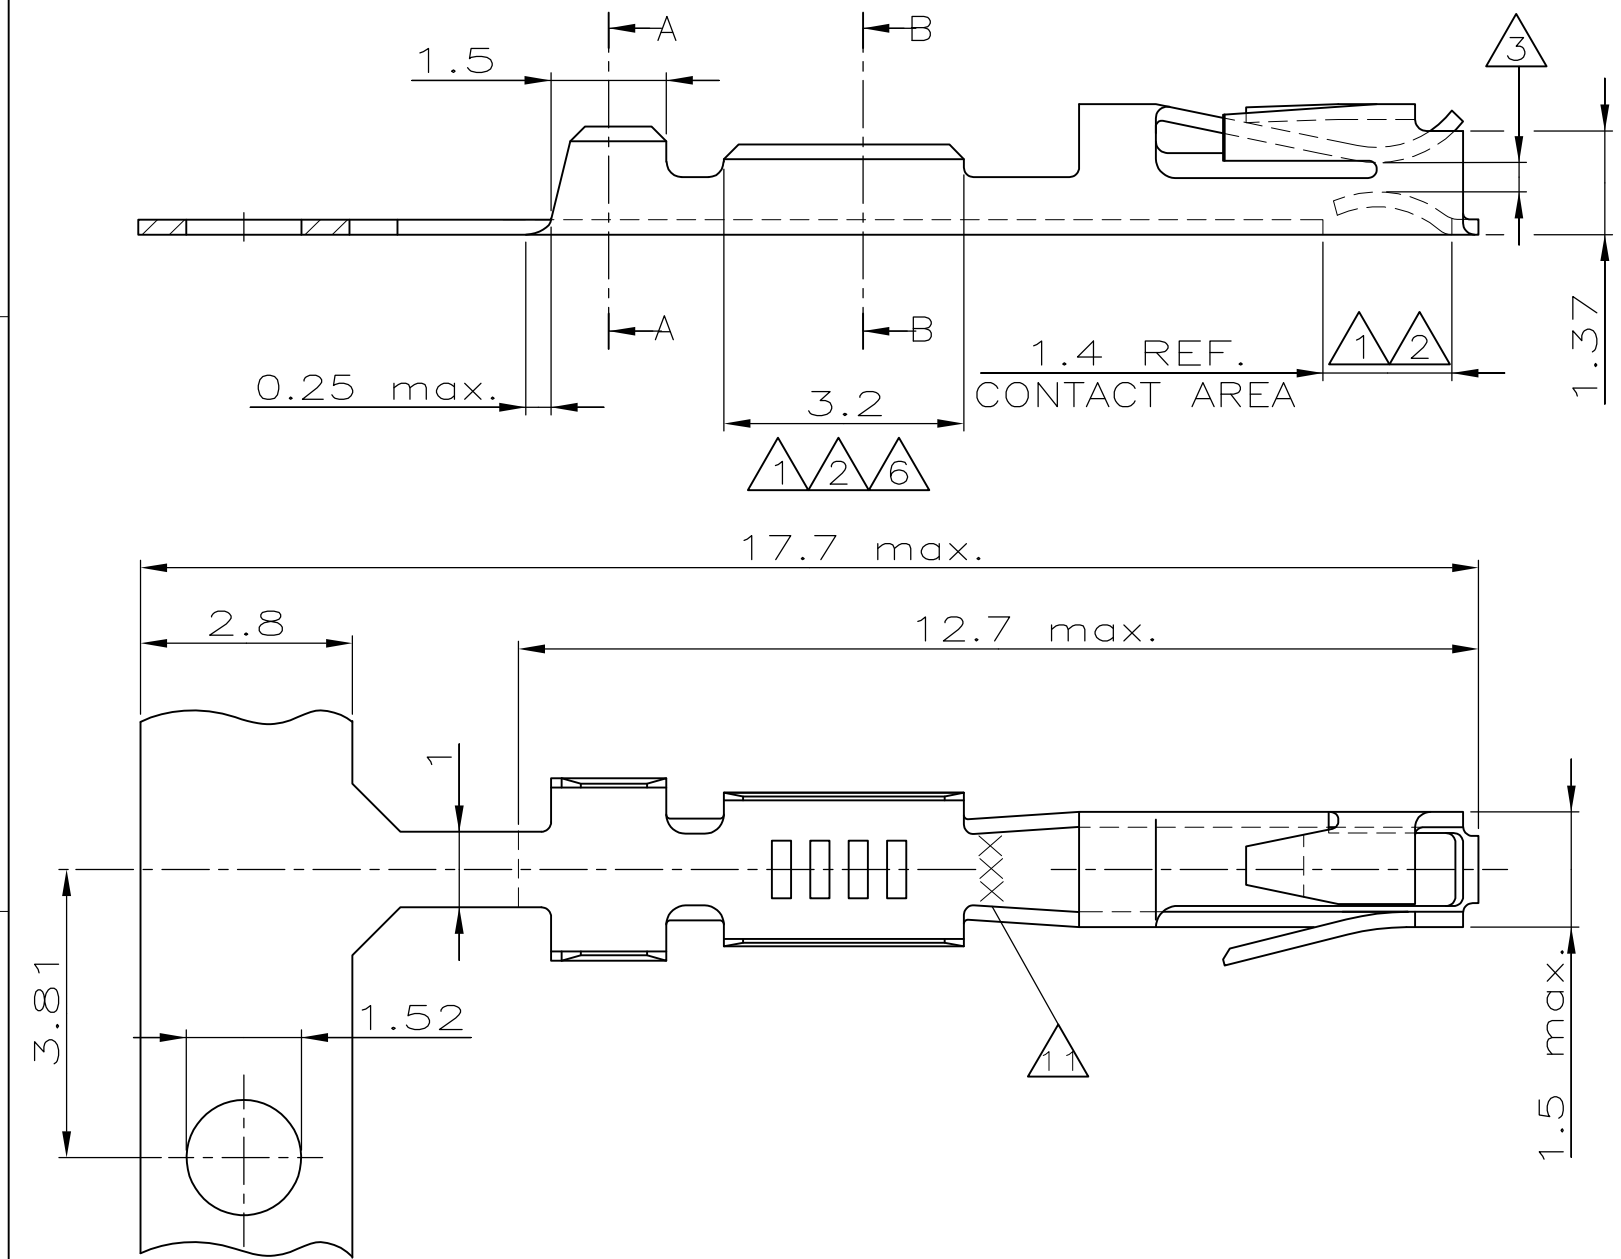

NOTES:

- 1 UNDERCOATING: 0,8µm NICKEL OVERALL.
CONTACT AREA: 0,8µm GOLD.
CRIMP AREA : GOLDFLASH
- 2 UNDERCOATING: 0,8µm NICKEL OVERALL.
CONTACT AREA: 1,25µm GOLD.
CRIMP AREA : GOLDFLASH
- 3 SUITABLE FOR 0,64x0,64 POST.
- 6 UNDERCOATING: 0,8µm NICKEL OVERALL.
CONTACT AREA: 0,4µm GOLD.
CRIMP AREA : GOLDFLASH
- 7 ADVANCED PROD. NRS. FOR DIN 41612 PART 5 SPEC.
- 8 PLATING : 2,0 µm TIN OVERALL.
- 9 REVERSE REELED FOR USE WITH MINI APPLICATOR.
- 10 STANDARD REELED FOR USE WITH STANDARD APPLICATOR.
- 11 TRADE MARK

WIRE RANGE :
 20 - 24 (26) AWG
 INSULATION RANGE :
 1,40 MAX DIA.

SUPERSEDED BY 166500-2

166722-1	1	PHOSPHORBRONZE	1-166500-2	10	Z
166722-6	8		1-166500-1	10	Z
166722-6	8		166500-9	9	Z
166722-4	6		166500-7	9	W
166722-2	2		166500-4	9	Z
166722-1	1		166500-2	9	Z
LOOSE PIECE NUMBER	PLATING		MATERIAL	STRIPNUMBER	REV.

THIS DRAWING IS A CONTROLLED DOCUMENT.
 DIESE ZEICHNUNG IST EIN KONTROLLIERTES DOKUMENT.

DIMENSIONS: DIMENSIONEN: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: ALLGEMEINTOLERANZEN
 n. ISO 8015
 n. ISO 2768 - mH

0 PLC	± -
1 PLC	± -
2 PLC	± -
3 PLC	± -
4 PLC	± -
ANGLES / WINKEL	± 1°

MATERIAL: -

FINISH / OBERFLÄCHE / FARBE: -

DWN: M. Pfeilschiffer 18-JUL-00
 CHK: V. Huhn 18-JUL-00
 APVD: -

NAME: STANDARD TANDEM SPRING RECEPTACLE

SIZE: A3 CAGE CODE: 00779 DRAWING NO: C-166500 RESTRICTED TO NUR FUER: -

CUSTOMER DRAWING / KUNDENZEICHNUNG SCALE: 0:1 SHEET: 1 OF 1 REV: Z1