


1st STEP

LAY THE CONDUCTOR IN THE HOUSING AS SHOWN

2nd STEP



FOLD UP THE HOUSING ACCORDING THE ARROW TILL LEAN THE CONDUCTOR AGAINST THE CONTACT

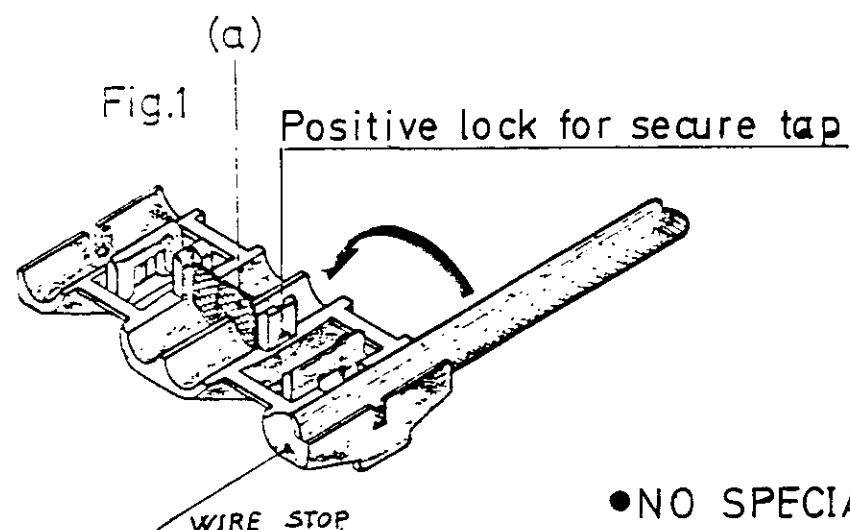

- NO SPECIAL TOOLS
- NO WIRE STRIPPING
- FOR SOLID OR STRANDED WIRE OF SECTION 1 TO 2,5 mm²
- EASY ASSEMBLY

3th STEP

SQUEEZE WITH TOOLING (PLIERS FIG.2) TILL POSITIVE LOCK IS LATCHED

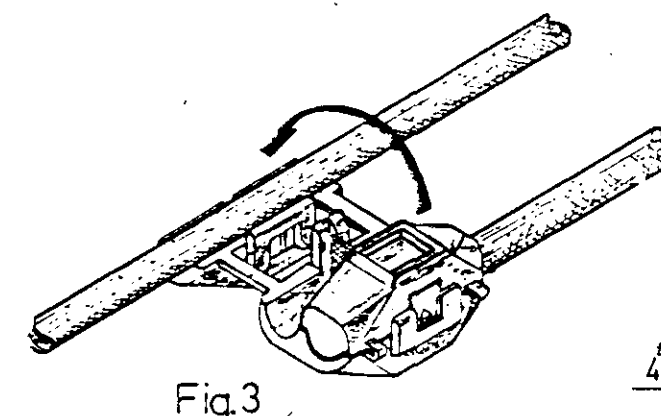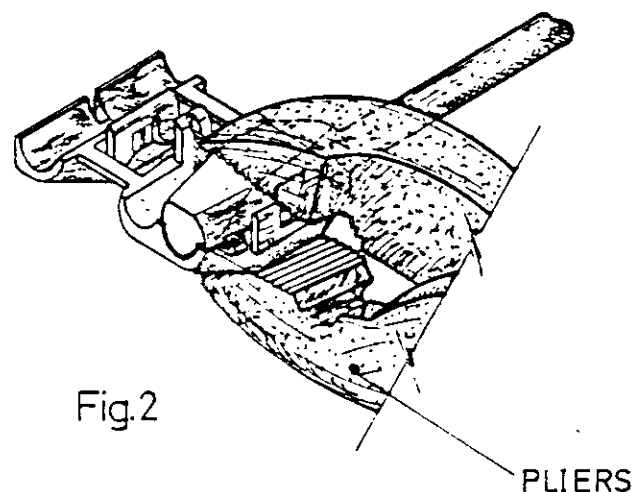


4th STEP

FOLD UP ACCORDING THE ARROW (FIG.3) TILL LEAN THE CONTACT AGAINST THE CONDUCTOR

5th STEP

SQUEEZE TILL LATCH THE POSITIVE LOCK
FINISHED ASSEMBLY

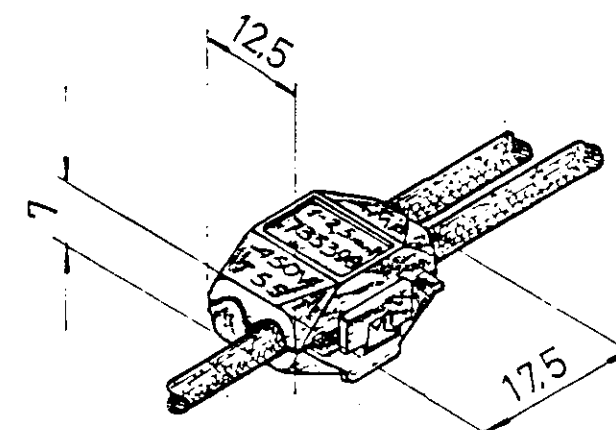

DIMENSIONES EN M.M.

PRINT DIST. AL 2

AMP 1253 25

735398		LATON NITRO	COLOR BLUE	TIN PLATED MOULDED
PN.		MATERIAL		ACABADO
PLANO DE CLIENTE SOLO PARA REFERENCIA				
DIS.	FECHA	©19 POR AMP - ESPAÑOLA S. A. TODOS LOS DERECHOS RESERVADOS LOS PRODUCTOS AMP ESTAN CUBIERTOS POR PATENTES ACTUALES O PENDIENTES		 AMP - ESPAÑOLA S. A. BARCELONA ESPAÑA
COM.	FECHA	SAMA HMO 1mm ² a 2,5mm ²		
DE.	FECHA	SAMA AISLANTE 4 mm. Max.		
APR.	FECHA	PRIMER USO General		
ESCALA		LOC	B	M.°
PN-735 398		PN-735 398		REV B
ELECTRO TAP CONNECTOR				

8 7 6 5 4 3 2 1