

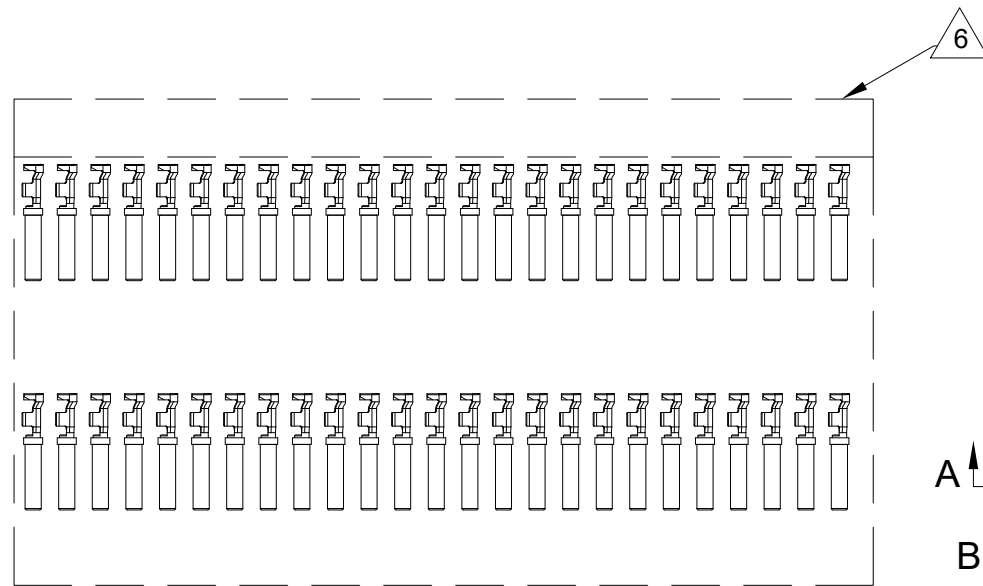




REVISIONS					
REV	ECO	DESCRIPTION	DATE	BY	APPR
A1	-	LOOSE PIECE RELEASE	10/JUL/24	CJF	-

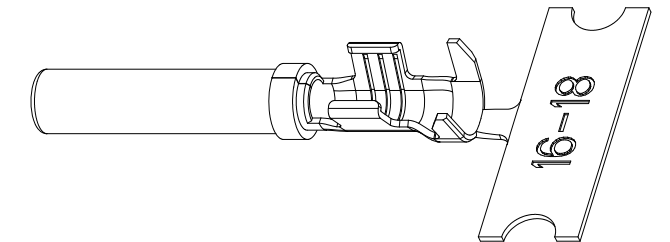

CARRIER STRIP ID: 16-18

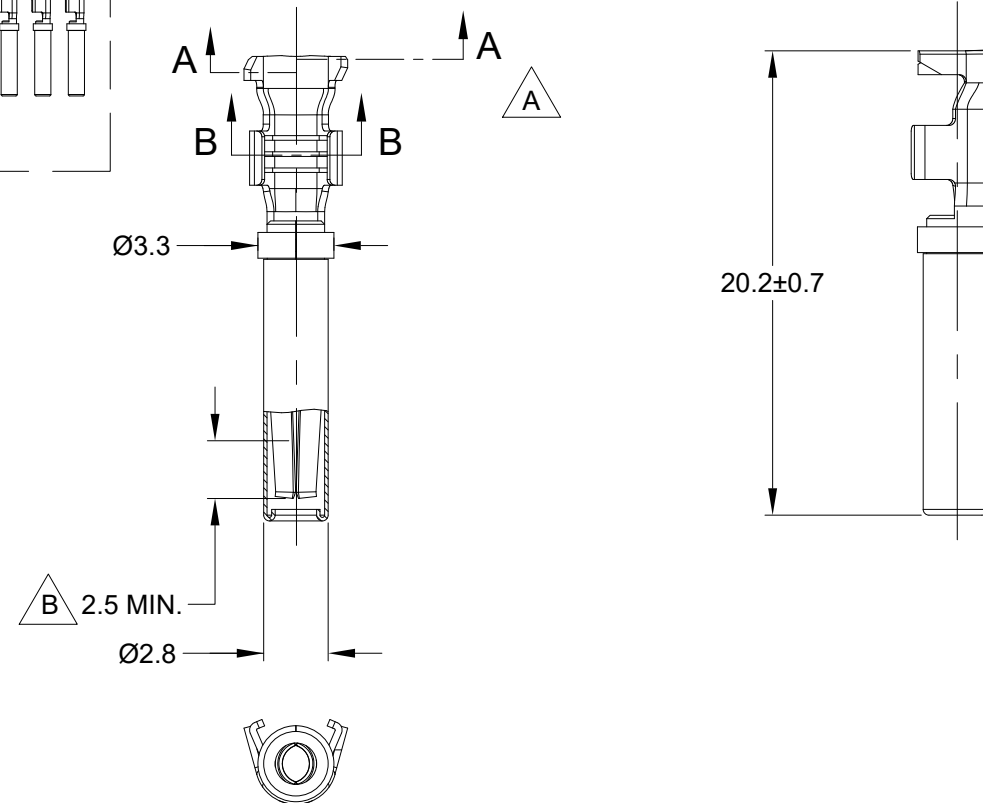

SECTION A-A



SECTION **B-B**

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL: COPPER ALLOY
2. PLATING: SEE PART NUMBER CHART
3. CONTACT SIZE: 16
4. SPECIFICATIONS:
 - 4.1 CURRENT RATING: 13 AMPS
 - 4.2 CONTACT MILLIVOLT DROP: 100 MILLIVOLT DROP @ 13 AMP TEST CURRENT.
 - 4.3 RoHS COMPLIANT
5. RECOMMENDED WIRE RANGE: 16 - 18 AWG
6. PACKAGE: 50 PCS PER BAG.
7. AVAILABLE HAND TOOL: ATT-16-01
8. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY

PART NUMBER CHART		
PLATING	PART NUMBER	PLATING DESCRIPTION
NICKEL	AT62-16-0122-LP	SELECTIVE TIN OVER NICKEL OVERALL IN  ZONE
GOLD	AT62-16-0144-LP	SELECTIVE GOLD FLASH OVER NICKEL OVERALL IN  ZONE OR ENTIRE CONTACT
TIN	AT62-16-0177-LP	TIN OVER NICKEL OVERALL

	SEE PART NUMBER CHART	REF: 1062-16-0122, 1062-16-0144 , 1062-16-0177	
	PART NUMBER	DESCRIPTION	ITEM
QUANTITY	MATERIALS LIST		
UNLESS OTHERWISE SPECIFIED 1) All dimensions are in metric(mm). 2) Tolerances are as follows: 1 PL DEC ±0.30 2 PL DEC ±0.15 3 PL DEC ±0.08 Fractions ±1/64 Angles ±1° 3) Note reference = 	SIGNATURES DRAWN: SULLEN.ZHANG CHECKED: ORION.LI ENGINEER: APPROVAL: TOMMY.XIE CUSTOMER: THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.	DATE 14/SEP/20 15/SEP/20 16/SEP/20	Amphenol Sine Systems - www.amphenol-sine.com 44724 Morley Drive Clinton Township, MI 48036 CONTACT, SOCKET, STAMPED,50PCS PER BAG, SIZE 16, 16-18 AWG, A SERIES
PROCESS SPECIFICATIONS:	SIZE B		
NEXT ASS'Y:	TYPE C-		
	DWG NO: AT62-16-01XX-LP		
	REVISION A1		
	SCALE: NONE		
	SHEET 1 OF 1		