





LOC		DIST		REVISIONS			
P	F	L	T	DESCRIPTION	DATE	DWN	APVD
				Y3	REVISED PER ECO-11-004587	11 MAR 11	RK HMR

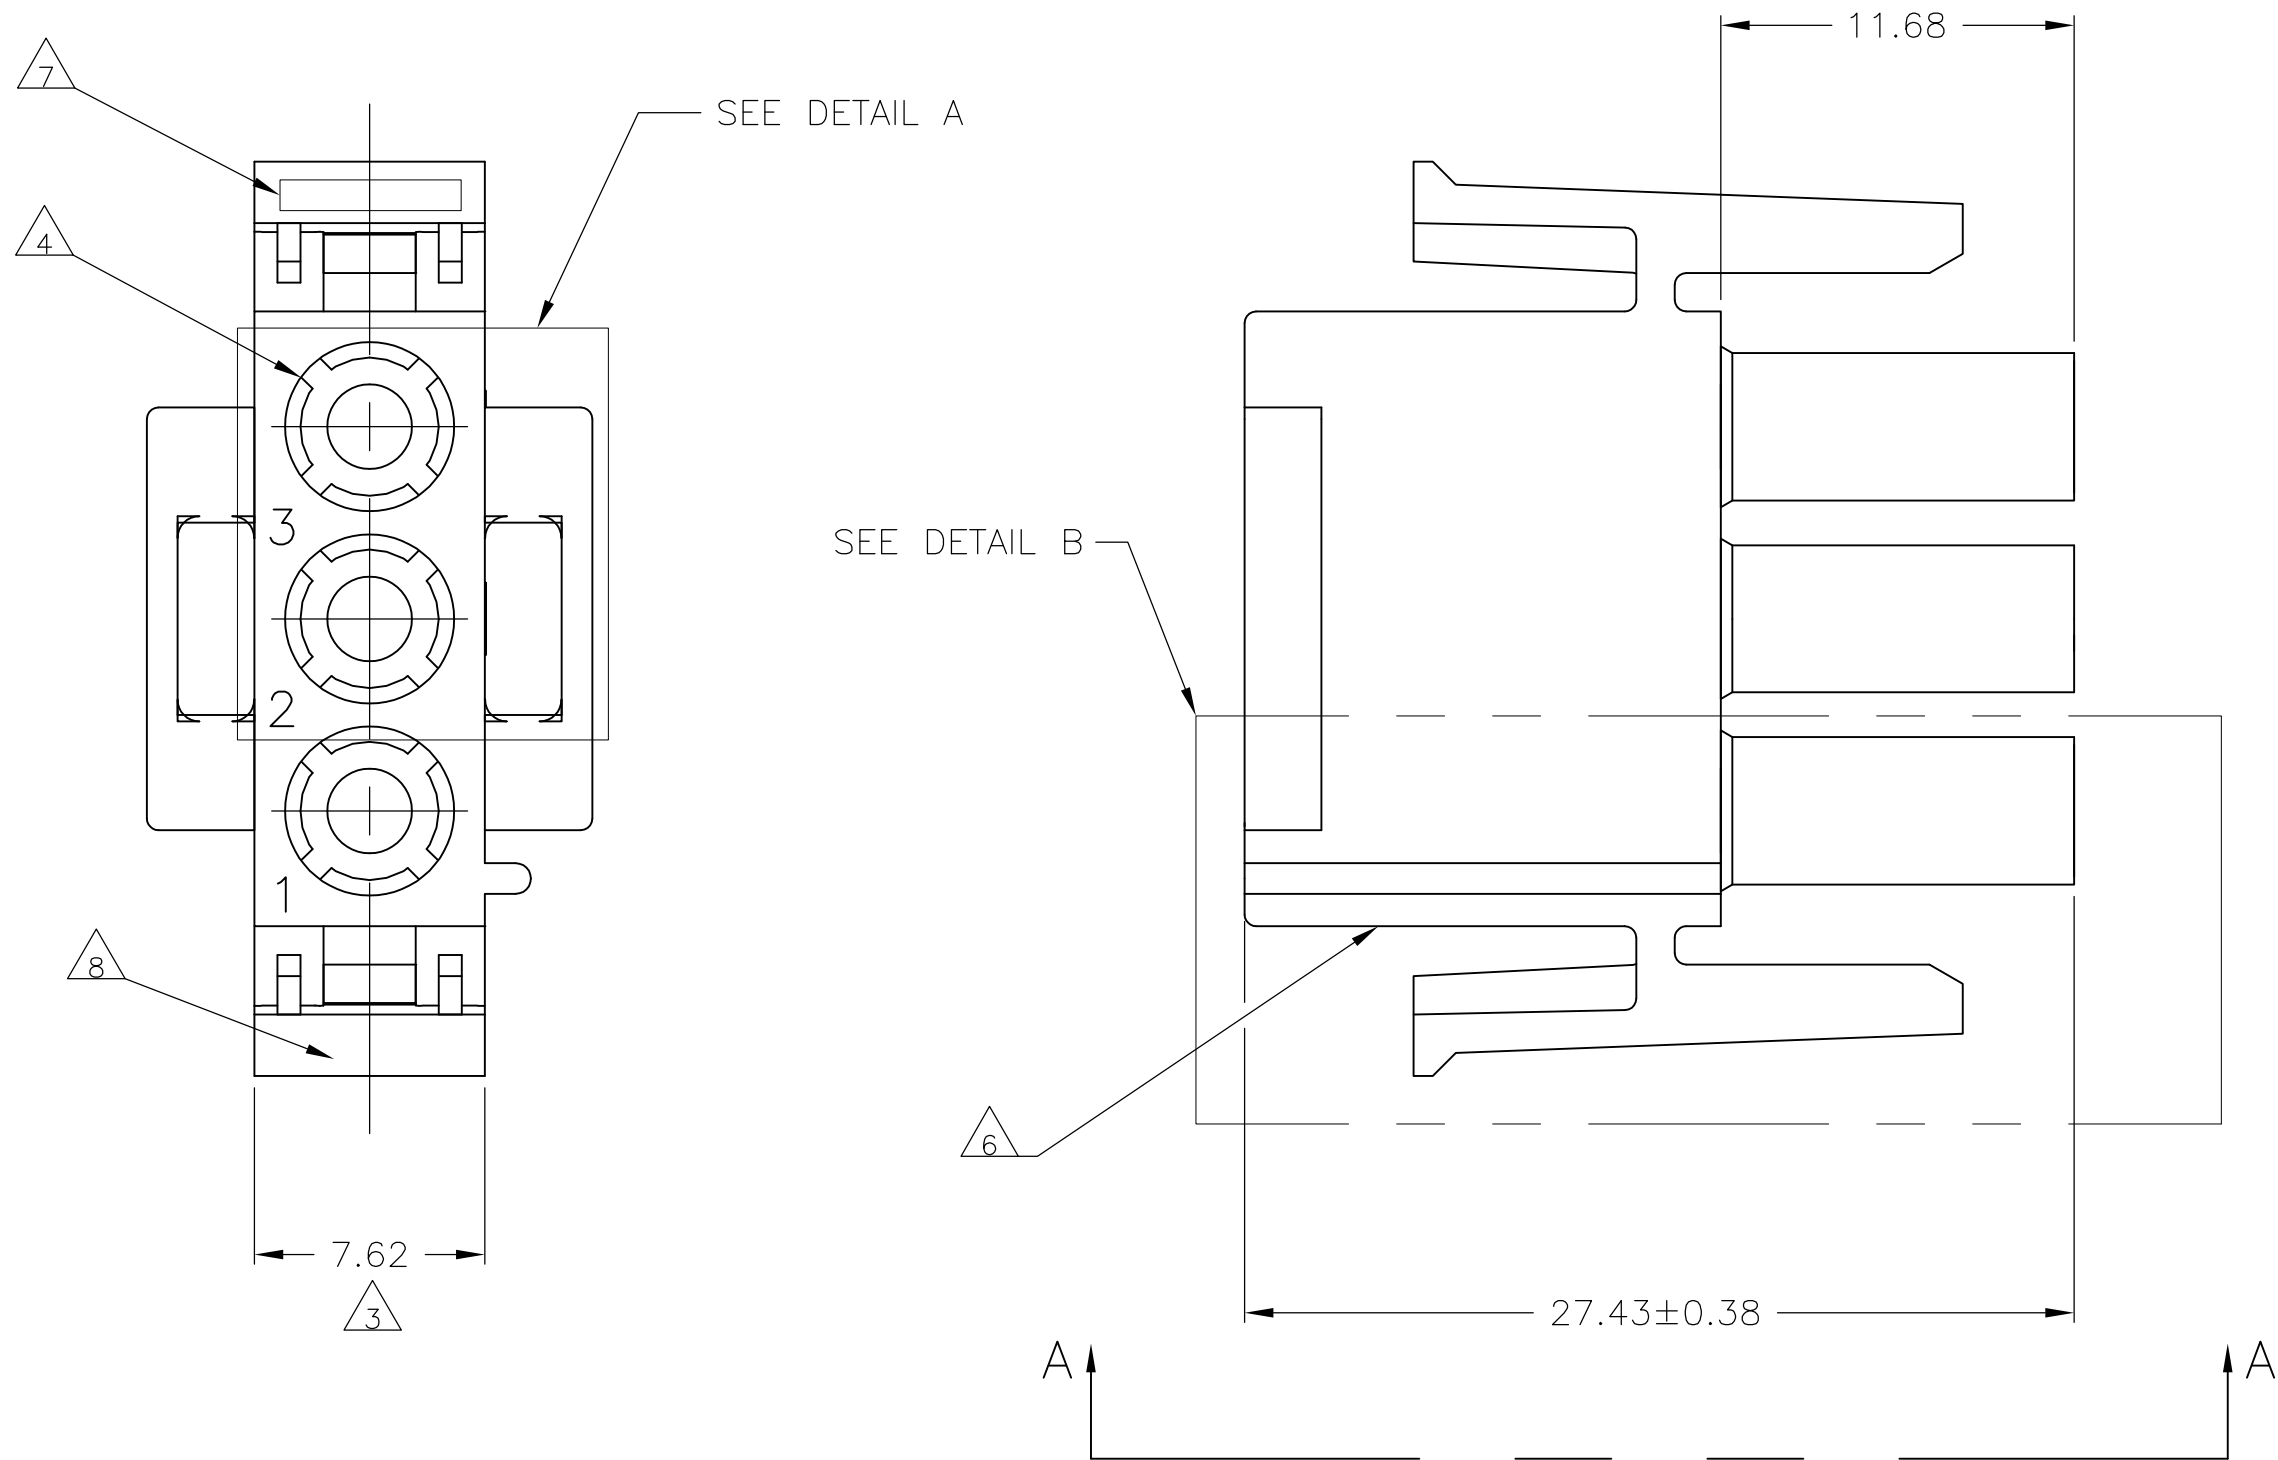


- MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ CAP OR HEADER.
- SMALL NICKS ARE PERMITTED ON THE CIRCUIT TOWERS WHICH COULD INCREASE THE INITIAL HOUSING MATING FORCE BY UP TO 4.4 NEWTONS [1.0 LBS]. NO INDIVIDUAL NICKED TOWER SHALL INCREASE THIS FORCE BY OVER 2.2 NEWTONS [.5 LBS].
- DIMENSION INDICATED IS AS MOLDED. ADDITIONAL GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR.
- FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
- NOT MANUFACTURED IN U.S.
- UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.
- TRADEMARK LOCATION (AMP OR TE CONNECTIVITY).
- MANUFACTURING LOCATION ID (OPTIONAL).

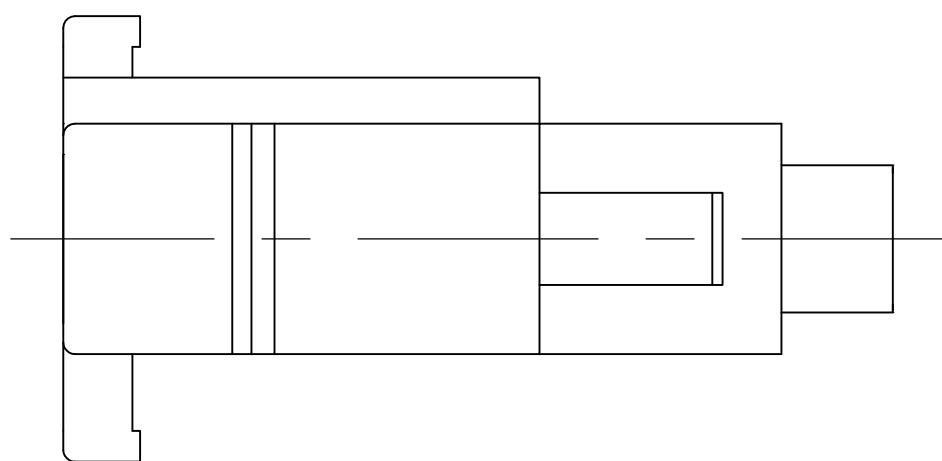


VIEW A-A
350766-4 ONLY

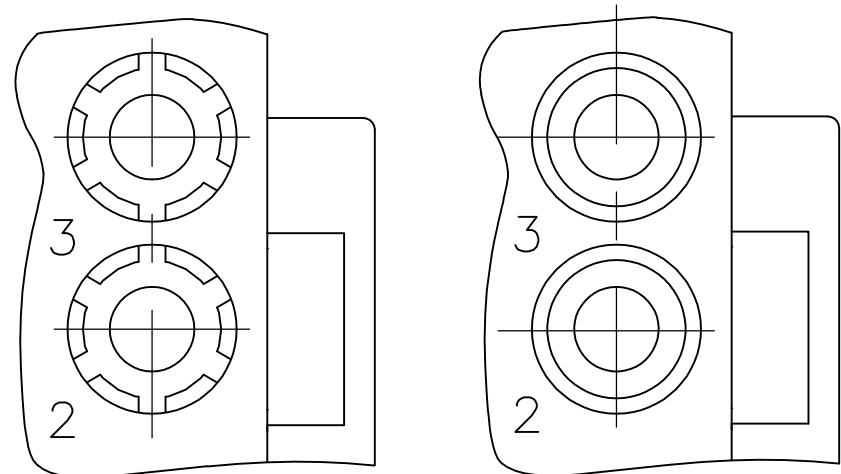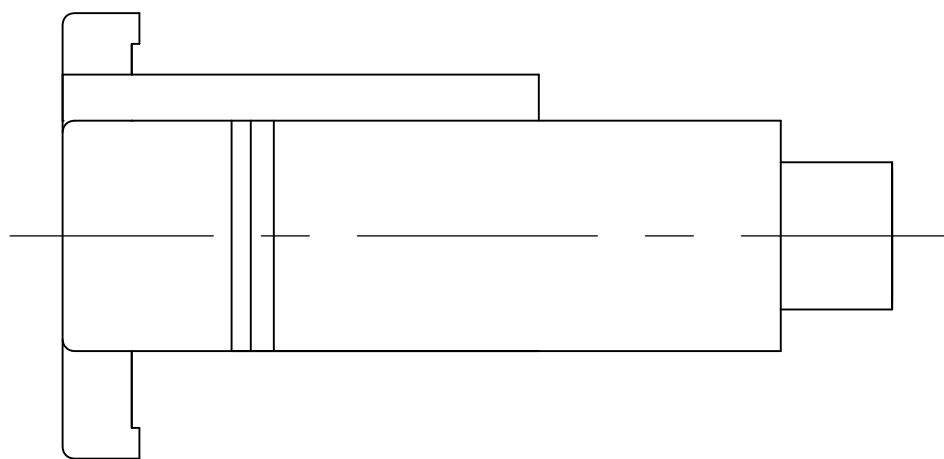


DETAIL A
OPTIONAL CONSTRUCTION

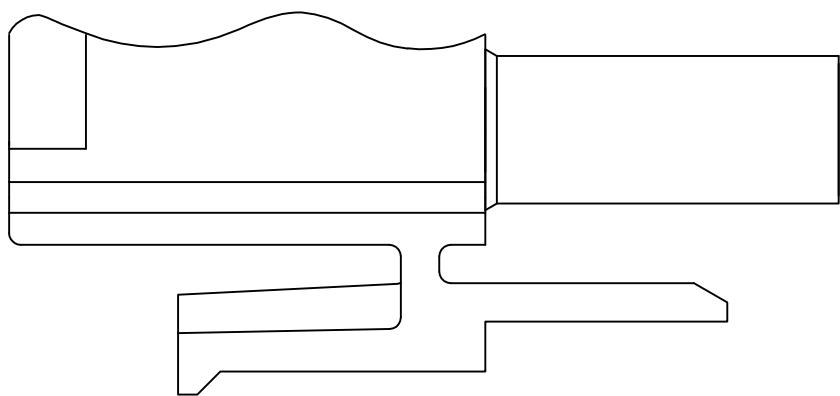

DETAIL B
350766-4 ONLY

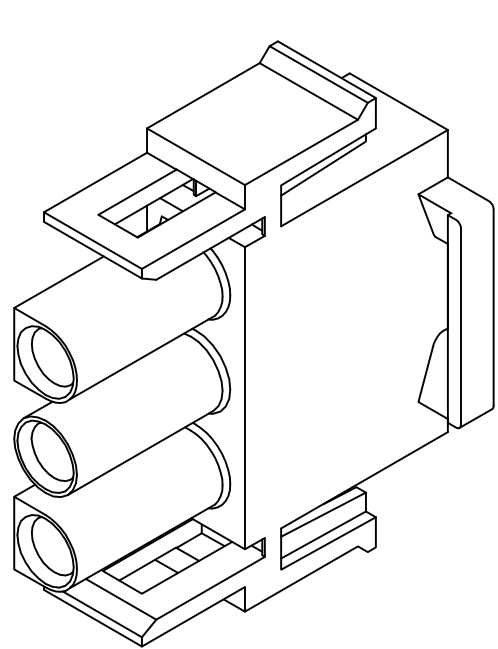

350766-4 3-DIMENSIONAL MODEL
NTS

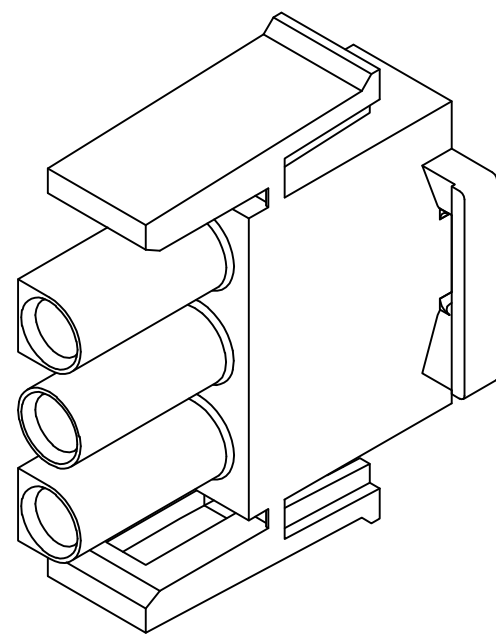

3-DIMENSIONAL MODEL
NTS

27.43	1.080
20.32	.800
14.73	.580
11.68	.460
7.62	.300
0.38	.015
0.13	.005
MM	IN
CONVERSION TABLE	

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 07OCT05	TE Connectivity	
		CHK S. RIDGILL 07OCT05		
DIMENSIONS:		APVD S. RIDGILL 07OCT05	NAME	
mm		PRODUCT SPEC	PLUG, 3 CIRCUIT, UNIVERSAL MATE-N-LOK(TM)	
		APPLICATION SPEC		
		WEIGHT		
MATERIAL NYLON, UL 94V-0		FINISH -	SIZE A1	
			CAGE CODE 00779	
			DRAWING NO 350766	
			RESTRICTED TO	
			CUSTOMER DRAWING	
			SCALE 4:1	
			SHEET 1 OF 1	
			REV Y3	