



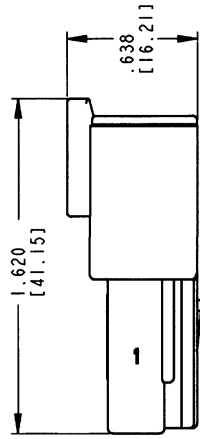



REV A		DTM04-3P		REVISIONS	
REV	SYM	DESCRIPTION	DATE	APPROVED	
NC		NEW RELEASE PER E.O. A14874	7-21-95	RDR	
A		REDRAWN & REVISED PER E.O. P17194	3-29-01	RDR	



6. MATERIAL - HOUSING: PLASTIC; GROMMET: RUBBER.
5. THIS RECEPTACLE MATES WITH DTM06-3S-\*\*\*\* PLUG.  
(\*\*\*\* = ALL MODIFICATIONS)
4. FOR CONTACT AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS SEE ENVELOPE DRAWING 0425-015-0000.
3. SECONDARY WEDGE LOCK SOLD SEPARATELY: WM-3P.
2. DIMENSION TOLERANCE: ±.025 [.64].
1. DIMENSIONS ARE IN INCHES [mm].

NOTES: UNLESS OTHERWISE SPECIFIED

CONTACT SIZE	MIN. INSUL. O.D.	MAX. INSUL. O.D.	WIRE RANGE [mm <sup>2</sup> ] REF ONLY
20	.053 [1.35]	.120 [3.05]	16-20 AWG [1.0-0.5]

DR	SIGNATURE & DATE		CP	MIL CODE
CHK	D. MEYER 03/15/01			
PE	D. Meyer 3/15/01			
APPD	A. Reed 3-29-01			
SCALE	NONE	WT		
RECEPTACLE			DTM04-3P	
3 PIN CONT. #20			ENVELOPE	
COLOR: GREY			DTM04-3P	
DTM SERIES			DTM04-3P	
The Deutch Company			DEUTSCH I.P.D.	
3850 INDUSTRIAL AVE.			HEMET, CALIF. 92545	