


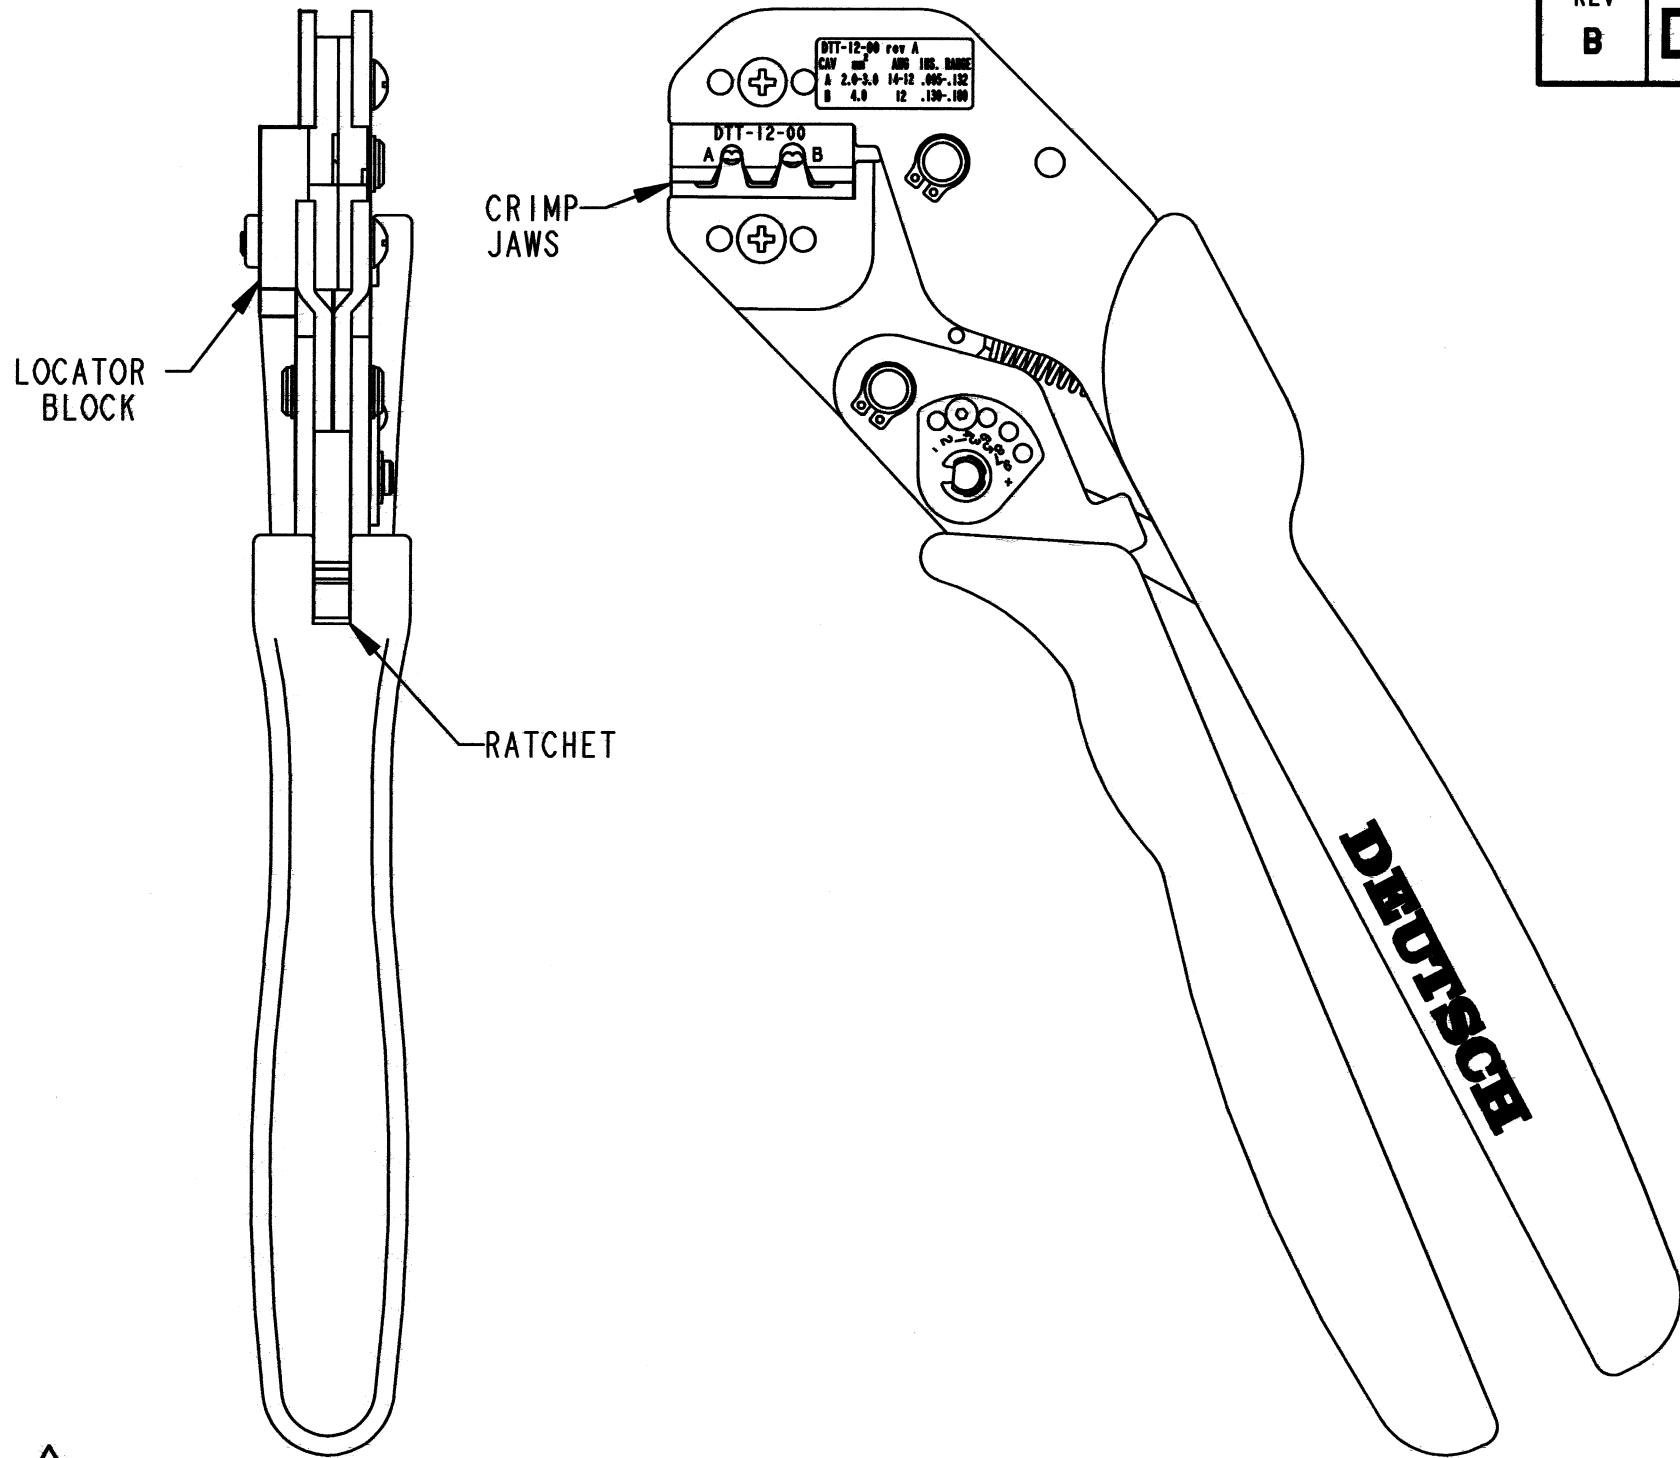

REV
B
DTT-12-00

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVED
NC	NEW RELEASE PER E.O. PI6388	11-24-99	R.D.R.
A	REVISED PER E.O. PI9059	5-1-06	R.D.R.
B	REVISED PER E.O. P21281	1-20-12	ADR

CRIMP DATA 1060-12-01** PIN 1062-12-01** SOCKET 		
CAVITY	WIRE SIZE 	INSULATION RANGE
A	2.0 mm ²	.113 - .156 [2.87 - 4.06]
	14 AWG(TXL,GXL,SXL)	
	2.5 mm ²	
	3.0 mm ²	
B	12 AWG(GXL,SXL)	.145 - .176 [3.68 - 4.47]
	4.0mm ²	

-  CONDUCTOR CRIMP TO BE MEASURED USING A BLADE MICROMETER WITH .100 [2.54] MIN SPINDLE AND .060/.010 [1.52/.25] ANVIL. SEE SECTION A-A.
5. EACH TOOL INCLUDES AN INSTRUCTION MANUAL 0425-036-0000.
-  **=CONTACT PLATING CODE (44=SELECTIVE GOLD; 66=TIN/NICKEL).
-  CONDUCTOR TYPES ARE PER SAE J1128(AWG) AND ISO 6722(METRIC).
2. TOOL IS BLACK WITH YELLOW HANDLES.
1. DIMENSIONS ARE IN INCHES [mm].
- NOTES: UNLESS OTHERWISE SPECIFIED.




SIGNATURE & DATE	
DR	J.LIM 10/15/05
CHK	B. B. 1/20/02
PE	B. B. 1/20/2012
APPD	S. B. 1/20/12
SCALE	NONE
WT	1.6 LB

FIELD MAINTENANCE
CRIMP TOOL
DTT-12-00
12 SIZE S/F

ENVELOPE

EP EP058	MATL. CODE
 3850 INDUSTRIAL AVE. HEMET, CA 92545	
B	DTT-12-00
DWG SIZE	CODE 11139 SHEET 1 OF 2

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVED
B	SEE SHEET 1	1-20-12	RDR

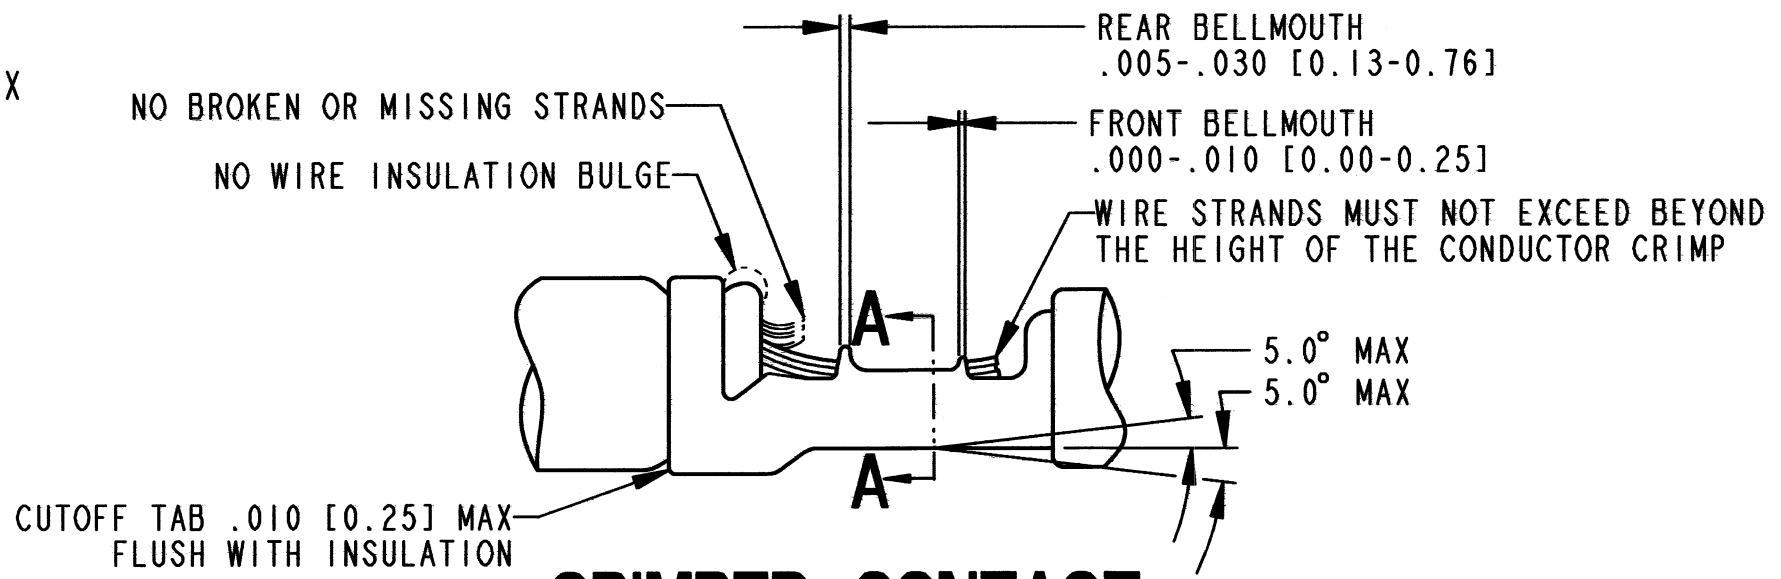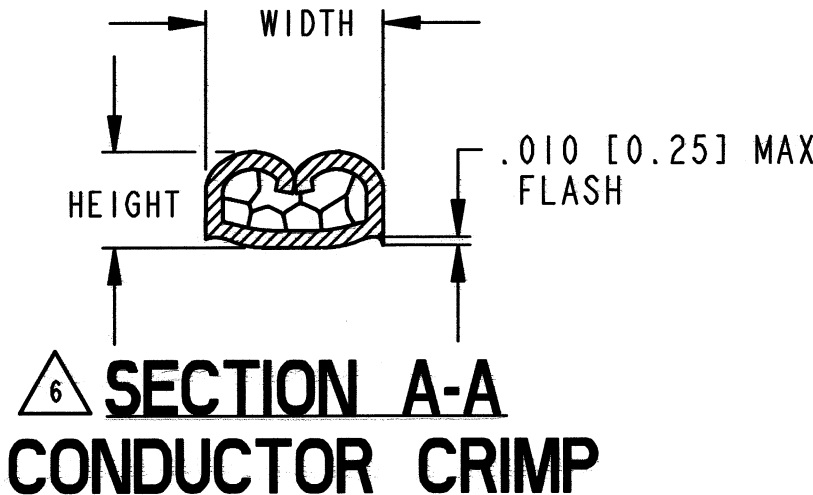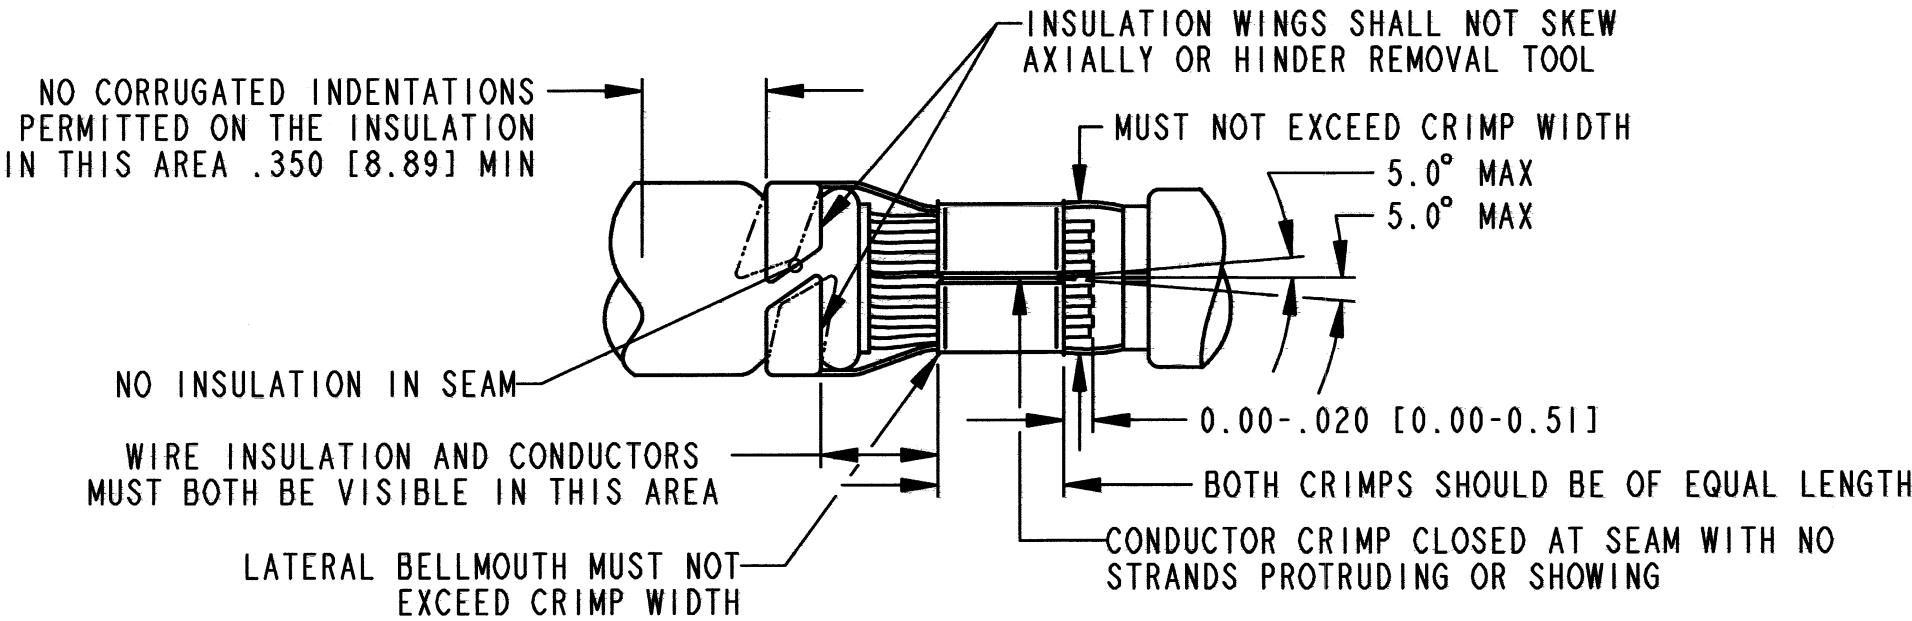

CRIMPED CONTACT

NOTES:

SIGNATURE & DATE		FIELD MAINTENANCE CRIMP TOOL DTT-12-00 12 SIZE S/F	EP EP058	MATL. CODE
DR	J.LIM 10/15/05		3850 INDUSTRIAL AVE. HEMET, CA 92545	
CHK	<i>[Signature]</i> 1/20/2012			
PE	<i>[Signature]</i> 1/20/2012			
APPD	<i>[Signature]</i> 1-20-12		B DTT-12-00	DWG SIZE
SCALE	WT	SHEET 2 OF 2		

ENVELOPE